SCIENTIFIC AMERICAN

Entered at the Post Office of New York, N. Y., as Second Class matter. Copyrighted, 1893, by Munn & Co.

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXIX.—No. 19.
ESTABLISHED 1845

NEW YORK, NOVEMBER 4, 1893.

$3.00 A YEAR.
WEEKLY.

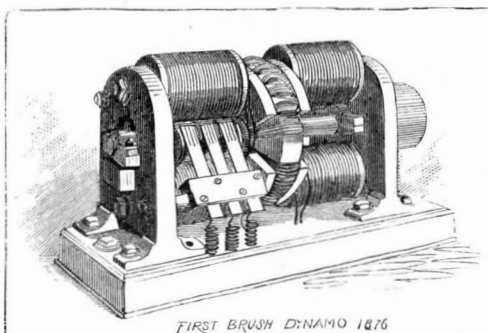

FIRST BRUSH DYNAMO 1876

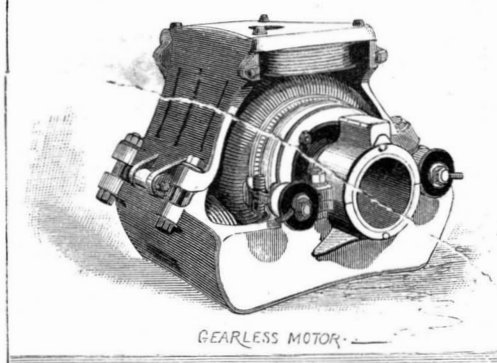

GEARLESS MOTOR.

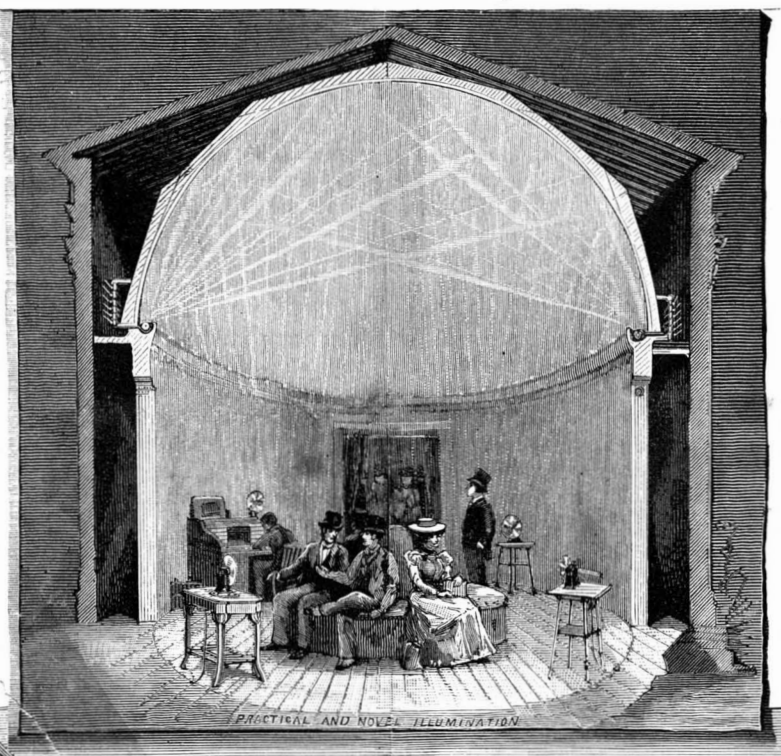

PRACTICAL AND NOVEL ILLUMINATION

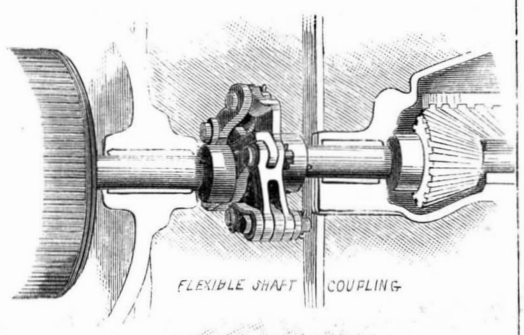

FLEXIBLE SHAFT COUPLING

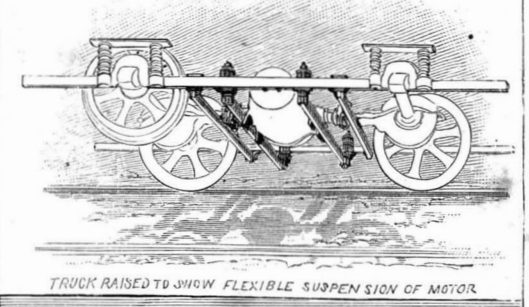

TRUCK RAISED TO SHOW FLEXIBLE SUSPENSION OF MOTOR

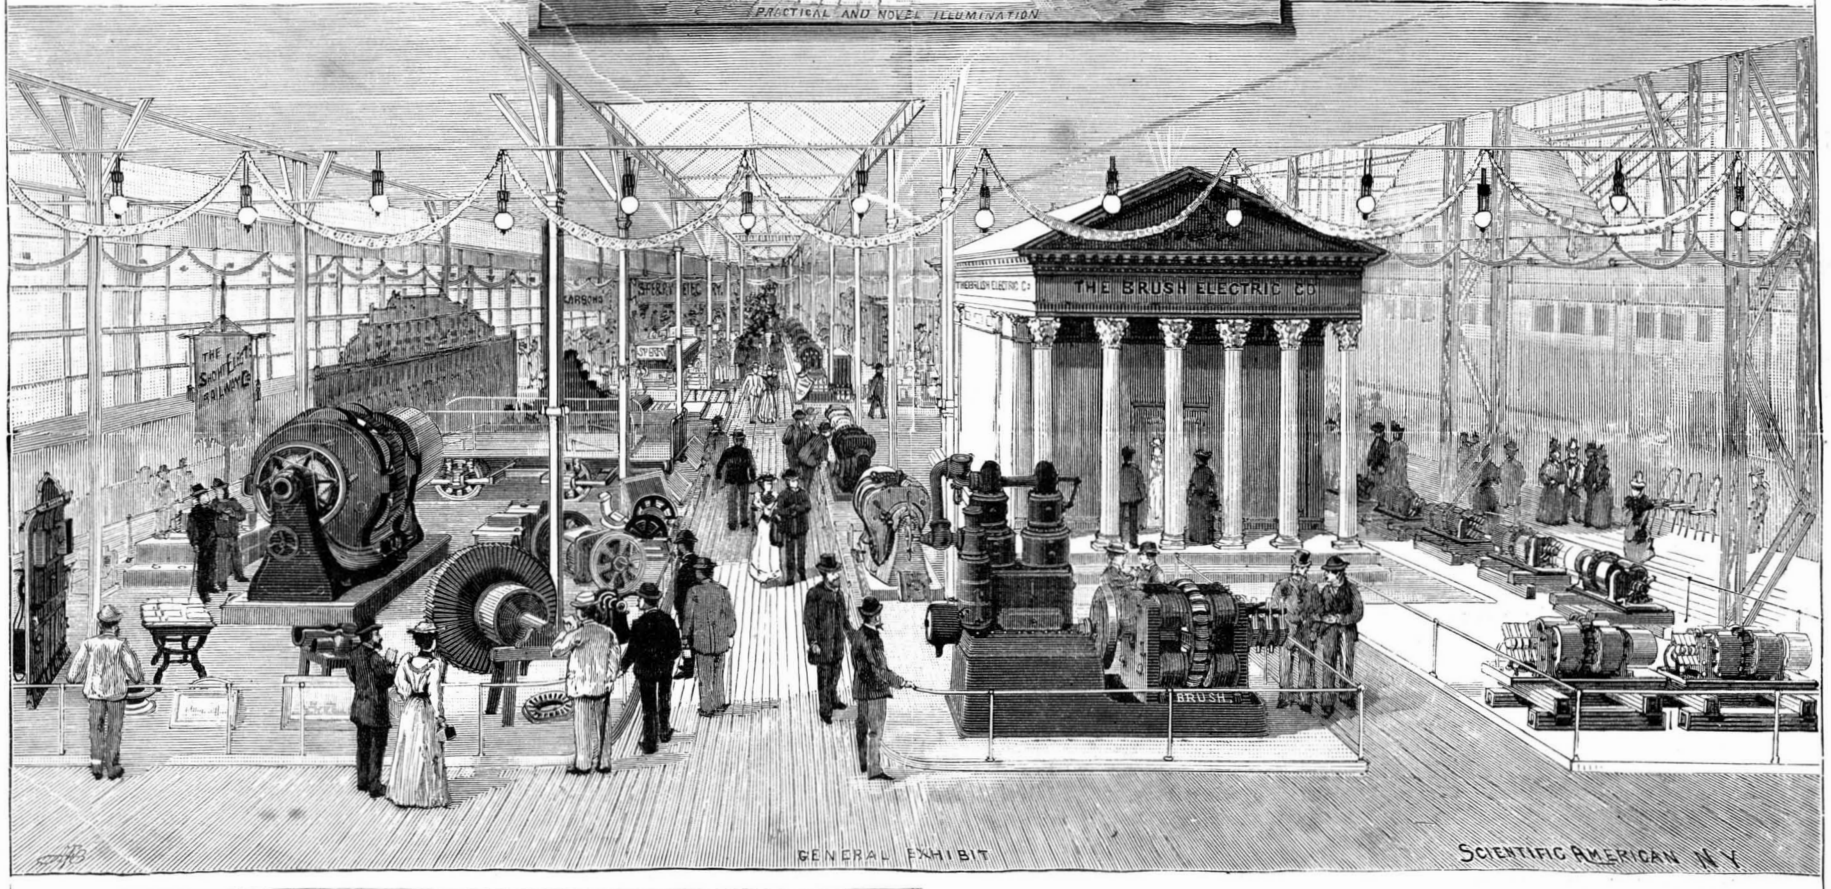

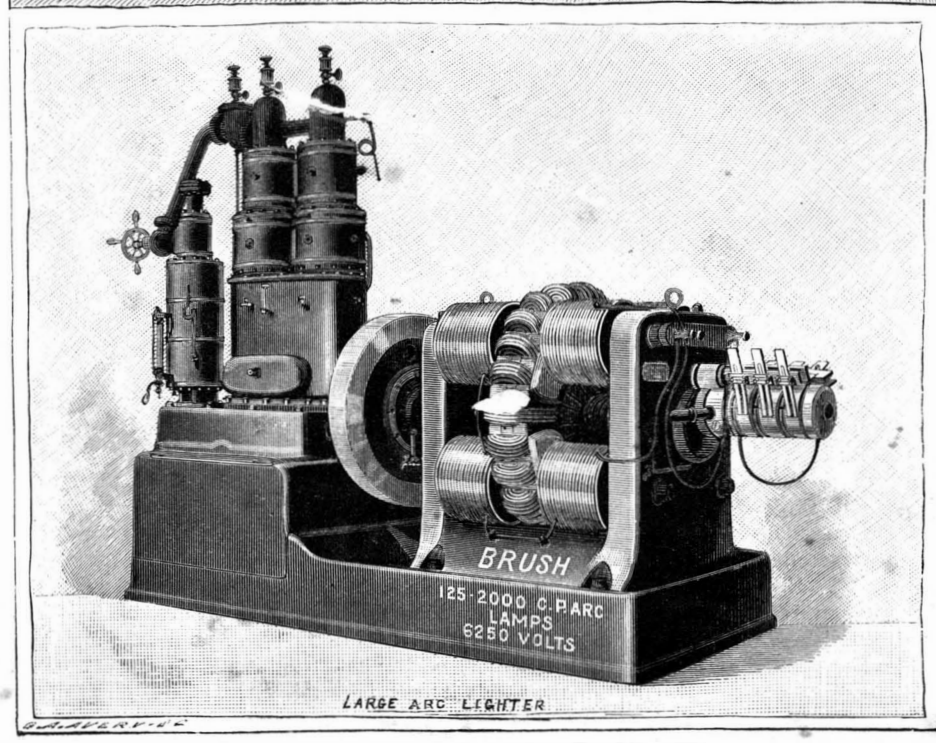

LARGE ARC LIGHTER

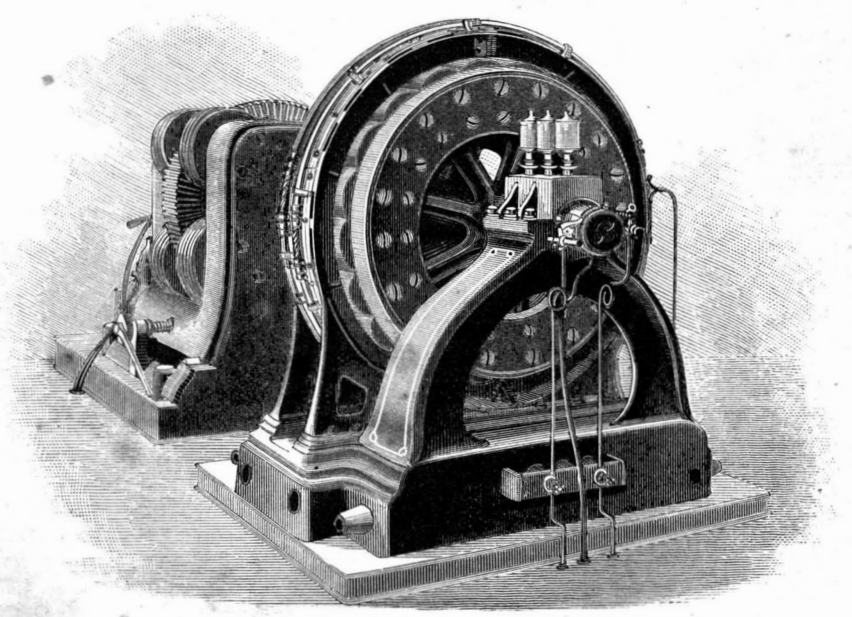

250 H. P. MOTOR, COUPLED DIRECT TO 3,000 LIGHT, 2,000 VOLT ALTERNATOR.

THE WORLD'S COLUMBIAN EXPOSITION—EXHIBIT OF THE BRUSH ELECTRIC COMPANY —[See page 295.]

© 1893 SCIENTIFIC AMERICAN, INC.

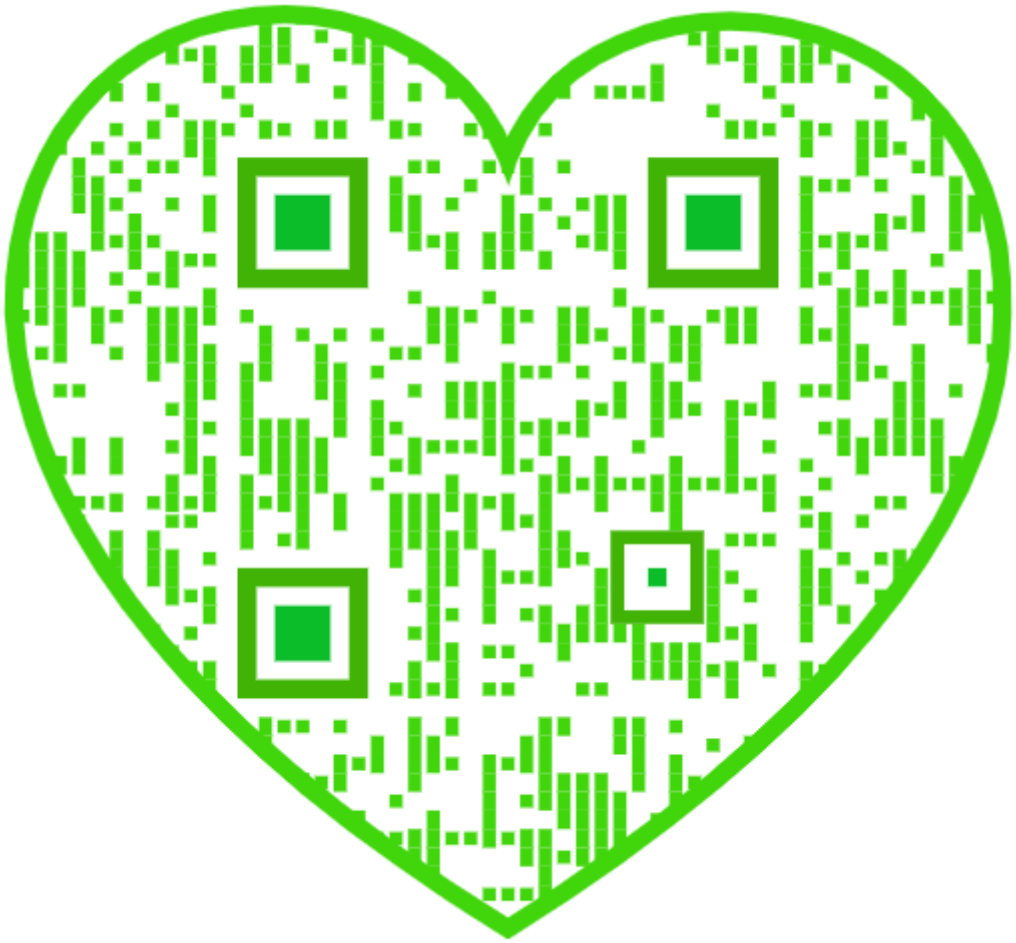

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....$3 00
One copy, six months, for the U. S., Canada or Mexico..... 1 50
One copy, one year, to any foreign country belonging to Postal Union. 4 00
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to one address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union, *eight dollars and fifty cents a year.*

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, to one address, $5.00 a year. To foreign Postal Union countries, $6.50 a year. Combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign Postal Union countries, $11.00 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. $3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, NOVEMBER 4, 1893.

Contents.

(Illustrated articles are marked with an asterisk.)

Beeswax bleachery, a*..... 297
Books and publications new..... 300
Chemistry, early..... 293
Coaling cruisers at sea*..... 290
Copper used by American Indians 294
Diamonds from coal gas*..... 299
Du Monceau Duhamel, statue of* 296
Electric power transmission (5457) 301
Engravings, half tone..... 299
Exposition Columbian—Air compressor, great, of the Ingersoll-Sergeant Drill Co.*..... 294
Closing of the..... 290
Electric passenger elevator*... 293
Electric railway exhibits*..... 295
Exhibit of the Brush Electric Co.*..... 289
Stallion, a prize Clydesdale*... 299
Wire mattresses, etc., exhibit* 295
Notes..... 291
Fire, curious origin of a..... 292
Fires, mysterious..... 298
Fruit stains, to remove (5451).... 301
Gold placer fields, South American..... 294
Gun carriage, disappearing*..... 296
Hands, the, to soften and whiten 293
Ink, sympathetic (5450)..... 301
Inventions, recently patented... 300
Kneading machine, Witz's*..... 293
Notes and queries..... 301
Patents granted, weekly record. 301
Railway rail, street, Keenan's*.. 298
Road bed, Platten's*..... 293
Roses, German otto of..... 298
Screw cutting lathes, Paterson's* 292
Ship canal, the Manchester..... 291
Soap powders, manufacture of.. 299
Steam engine cut-off, Tennyson's* 292
Steam engine valve chest, Myers'* 293
Swordfish exploits*..... 297
Telephony, long distance..... 299
Topographic rule, Delcroix's*.... 298
Vanillin from cloves..... 292
Wire tramways..... 294
Water tank painting..... 298

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 931.

For the Week Ending November 4, 1893.

Price 10 cents. For sale by all newsdealers

PAGE

I. ARCHÆOLOGY.—Restorations of the Pantheon of Rome.—A very important and striking contribution to Roman archæology, based on recent researches.—2 illustrations..... 14882

II. BIOGRAPHY.—A Newly Discovered Portrait of Mozart.—An undoubtedly authentic portrait of the great musician, with notes on the same.—1 illustration..... 14871

III. CHEMISTRY.—Chemistry at the British Association.—*Resume* of the proceedings of Section B.—Interesting notes on the work of British chemists..... 14883

IV. CIVIL ENGINEERING.—The Austro-Hungarian Maneuvers—Construction of the great bridge across the Danube.—Construction of a pontoon bridge across the Danube in two hours.—1 illustration..... 14879
Transmission of Power.—By R. S. ALLAN.—A prize essay of the Aberdeen Mechanical Society.—Short and long distance transmission of power..... 14879

V. ELECTRICITY.—A New Method of Electric Culture.—Utilization of the magnetism of the earth and air for purposes of agriculture, with results attained in actual use.—1 illustration..... 14878
The Chloride Electrical Storage Battery.—By HEBBERT LLOYD.—An important innovation in the construction of storage batteries, will full description of the process of manufacture..... 14877

VI. ENTOMOLOGY.—Insects Injurious to Forest Trees.—Insects injuring forest trees in Great Britain.—A serious question for entomologists.—4 illustrations..... 14885

VII. HYGIENE.—American Life and Physical Deterioration.—The future of the American race and probabilities of its deterioration..... 14873
The Moral Effects of Physical Exercise.—How exercise should be taken.—The value of association therein..... 14873
Vocal Physiology and Systematic Voice Training for the Prevention of Diseases of the Larynx.—By J. WALTER PARK.—How to preserve the voice, with special reference to the life habits and hygiene of musicians..... 14872

VIII. METEOROLOGY.—On Rainmaking.—By ALEXANDER MACFARLANE.—A scientific review of this question, with criticism of different efforts as made and of the suggestions of various inventors..... 14880

IX. MISCELLANEOUS.—The Brazilian Revolution.—Notes on the recent rebellion, with portraits of the President and of the leader of the revolt.—2 illustrations..... 14883

X. MYCOLOGY.—A Poisonous Fungus.—One of the most poisonous of British mushrooms described and illustrated.—1 illustration.... 14886

XI. NATURAL HISTORY.—Whalebone and Whalebone Whales.—By R. LYDEKKER.—A popular account of whales and of the growth of whalebone, and probabilities of the future supply of the article..... 14884

XII. NAVAL ENGINEERING.—Who Invented the Screw Propeller?—An interesting contribution to the early history of the science of naval engineering..... 14880

XIII. PHYSICS.—A New Sclerometer.—An elaborate apparatus for the study of hardness of minerals, of metals, and of other substances.—1 illustration..... 14875
Mahler's Calorimetric Shell.—Apparatus for determing the calorific value of fuels with great accuracy. 1 illustration..... 14874
Physics at the British Association.—Interesting summary of the proceedings in Section A of the British Association, including a discussion on education in physics..... 14875
The Dance of the Soap Bubbles.—An exceedingly pretty experiment in physics without apparatus.—1 illustration..... 14883

XIV. TECHNOLOGY.—A Visit to the Havemeyer & Elder Refinery, Brooklyn.—By Messrs. A. HERZFELD and W. MARTZ.—A description of the American process from the European standpoint. 14873
The Invention of Lucifer Matches.—A curious question in the history of technology.—Early notes on the matches of our forefathers..... 14882

CLOSING OF THE WORLD'S COLUMBIAN EXPOSITION.

When our readers shall have received this paper the Chicago exhibition will be no more. After months of debate, after suggestions as to the city where it should be held, after criticisms and congratulations innumerable following the decision as to site, Chicago may justly claim to have honored herself and the United States by her achievements. In a time unprecedentedly limited when compared to the work to be done, the buildings were erected and the Fair was opened at the appointed date. From the sea of mud, as the ground was described in its early winter and spring days, the lovely Jackson Park, with its beautiful landscape and floral features and its Venice-like lagoons, blossomed into being. The great buildings rose in their places, the fountains and statuary were installed, and the White City appropriately graced its surroundings.

In many ways the Fair was an innovation. The combination of landscape and waterscape was new. The great area occupied necessitated adequate means of transportation within the grounds. The buildings, too, were so large as to make it hard to see them satisfactorily. Accordingly the waters of the lake were utilized, and the water transportation within the grounds became one of the features. Bringing old and new together, gondolas from Venice competed with electric launches in this service.

The Fair grounds and buildings were not merely a receptacle for exhibits. By the efforts of the best architects and artists of our nation the buildings and statuary became the best exhibit. Unsurpassed by man when their size is considered, the great buildings have received numerous encomiums from all critics from the art standpoint. The statuary on them and distributed through the grounds was another feature of great attractiveness. Thus having provided a true world's pleasure ground, Chicago drew upon the treasures of the globe for its adornment with exhibits. But, in the opinion of many, the work of Chicago (the grounds and buildings) surpassed their contents (the exhibits). This marked a recent innovation, for the artistic side has usually been esteemed as of secondary importance in the buildings and grounds of World's Fairs. Paris, in 1889, set an example which Chicago, in 1893, followed to its proper conclusion.

The system of concessions, as carried out upon the Midway Plaisance, introduced the spectacular element, but of a character of real value. Never before had the different nations of the world had so impressive a showing—no such practical lessons in anthropology have ever been given. The attendance at the Fair has been one of its wonders. A thousand miles from the seaboard, its situation seemed to militate against it. But thirty-seven railroads, with over seventy-six thousand miles of track, center in Chicago. Without a change of cars, almost any inhabitant of the continent could reach the Fair on some of these lines.

At World's Fairs it has become the custom to have days devoted to or in honor of special occasions, States, cities, or countries. These are signalized usually by a greater attendance than usual. At Chicago we find a record of 128,965 paid admissions on opening day, 283,273 on the Fourth of July, 160,382 on New York day and 243,951 on Illinois day. These records appear small if contrasted with the October attendance, when the daily visitors varied from 128,196 on October 2 to the magnificent and unprecedented number of 716,881 on October 9, Chicago day. As the Fair was reaching its close, the city of New York felt that it should congratulate its sister, and on October 21 Manhattan day was celebrated. The mayor of New York and other representative dignitaries visited Chicago and participated in the ceremonies of the occasion. The attendance was 298,928.

These attendances may be contrasted with Paris and Philadelphia. The greatest day's attendance at the Philadelphia Exposition of 1876 was 217,526; at the Paris Exposition of 1889, it was 397,150. Thus Chicago on her own day almost doubled the Paris and almost trebled the Philadelphia figures.

The total attendance of some twenty-one millions is, however, inferior to that of the Paris Fair of 1889, where 28,149,353 visitors were recorded, although the Chicago Fair occupied six times the area of ground and had five times the area roofed compared with this Exposition. The visitors increased in number as month after month passed by. In May 1,050,037 are recorded. This was at the time a great disappointment. But when June showed 2,675.113, expectations began to be brighter, and the succeeding months showed 2,760,263 for July, 3,515,493 for August, 4,659,871 for September, and about seven millions for October. Thus the entire attendance for the opening month was almost the same as that of two days in October—Chicago and Manhattan days. If Chicago were a little further south and if its Fair had another month of life, the attendance would probably reach thirty millions.

And now it passes into history as one of the world's wonders, as one of man's greatest achievements, something that the present generation can hardly hope to see equaled.

COALING CRUISERS AT SEA.

During the war of the rebellion we kept a large fleet of vessels on blockading duty. They were often obliged to keep the sea for long periods of time, especially off the Carolina coasts, and the question of methods of supplying them with provisions and coal was one which engaged the earnest thought of the Navy Department and naval officers in general.

Provision transports were sent from Northern ports, and though usually successful in delivering their freight to the blockading fleet, yet occasionally they met with disaster and frequently with delay. The principal difficulty was in transferring the coal, the motions of the two ships, even in a small sea, rendering the operation difficult and dangerous.

A solution of the problem of coaling ships at sea has been sought ever since, and many devices have been brought forth by inventors both in and outside of the navy. The solution is particularly valuable to the United States in view of the fact that we have no coaling stations. In case of foreign naval operations we would be obliged to send colliers, and our cruisers would probably have to take the coal from them while at sea or outside of the marine league.

Recently the Navy Department ordered two of the North Atlantic fleet to be equipped and rigged to try the experiment of coaling at sea after a new plan. The ships detailed for this purpose were the flagship San Francisco, which represented the cruiser, and th United States steamer Kearsarge, which played th part of collier.

The plan is for the cruiser to tow the collier with a short a hawser as practicable, the length depending on the state of the sea. The smoother the sea the shorter the tow line. In order that there shall be as little jump to the ships as possible, the cruiser steams ahead very slowly, barely having steerage way.

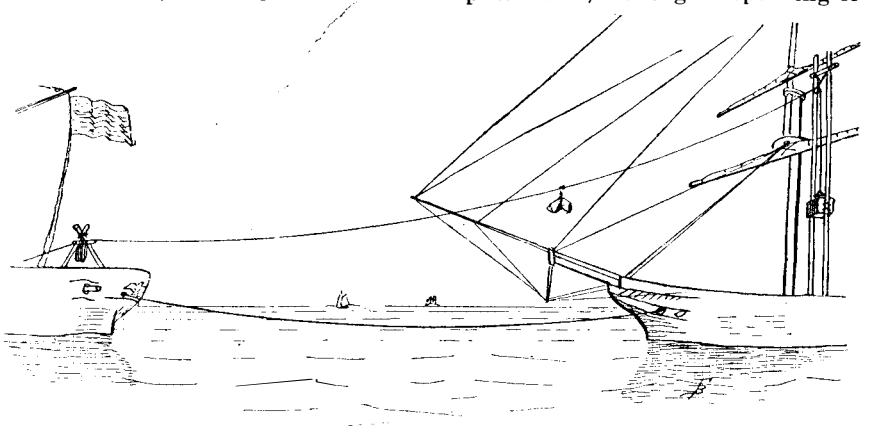

COALING VESSELS AT SEA.

A jackstay is rigged between the two ships, the higher end being on the collier and the coal in bags, suspended from trolley wheels which hang on the jackstay, runs by force of gravity from the collier to the cruiser. The jackstay consists of a steel wire rope about three-quarters of one inch in diameter. It must be kept properly taut and yet must get no undue strain either from towing or from the plunging of the ships. This is accomplished by using a counterpoise.

The experiment was tried on the 18th of October, off Sandy Hook.

The ships were rigged as follows: On the after part of the cruiser was erected a small derrick or shears about ten feet high, composed of two short spars lashed together at the heads and firmly secured at the heels, on the deck. A cross piece was lashed near the top of the shears and from this cross piece was hung a number of fakes of rope cable to act as a buffer for the bags of coal. Over the cross piece ran the jackstay, the forward end being firmly fastened to the deck near the mizzen mast.

On the forward part of the collier were erected two upright poles to act as guides for the counterpoise. The upper ends of these poles were lashed to the foretopsail yard, the heels being firmly secured to a shoe on the forecastle deck.

The poles were parallel and about four and a half feet apart. A cross piece was lashed near the heads, and from a bridle from this cross piece was suspended a large iron sheave or gin block. Between the poles was arranged a cubical box with guide irons surrounding the poles. The box was also fitted with an automatic lever, spring and eccentric clutches to prevent the box dropping to the deck in case of accidental parting of the jackstay. The contrivance was similar to that used on elevators in buildings. The box weighted with sand formed the counterpoise.

The steel wire rope jackstay was made fast to the counterpoise box, then passed up and over the gin block at the head of the poles, and thence to the

© 1893 SCIENTIFIC AMERICAN, INC.

cruiser over the cross piece on the shears, and the end secure on the deck, as before mentioned. Sufficient strain was put on the jackstay to hoist the counterpoise box about half way up the poles. As the ships roll and pitch, the counterpoise box slides up and down between the poles, keeping a constant and even stress on the jackstay.

Both the shears on the cruiser and the poles on the collier were firmly held in place by rope guys and stays. The coal, in sacks is hoisted by a special tackle on board the collier up to the top of the poles, where it is hooked to a small trolley wheel, which is placed on the jackstay. When released, the weight of the coal causes the trolley wheel to run down the inclined jackstay to the cruiser. Just before it arrives at the shears, a tripping device throws the trolley off the jackstay, and the sack of coal falls to the deck, its forward motion being checked by the buffer made of hawser loops.

The distance between the ships, or rather the distance from the shears on the cruiser to the upright poles on the collier, was about two hundred and thirty-five feet. The height of the gin block above the cross bar of the shears was about thirty-two feet. The inclination of the jackstay to the horizontal was about seven degrees and fifty minutes. The total weight of the counterpoise box and its load of sand was about sixteen hundred pounds. The weight of the bags of coal was nearly two hundred pounds. The time of travel from pole head to shear head was about fourteen seconds. The full time of hoisting and sending over ten bags was about twenty-one minutes. This gives a rate of delivery of about two and two-thirds tons per hour.

All parts of the apparatus worked well, but as the sea was calm, it was impossible to tell what would be the result in even a moderate sea. In a rough sea the distance between the ships would have to be increased, and there must be a corresponding increase in the height of the gin block in order that the proper inclination shall be given to the jackstay.

Although there is doubt about the apparatus working properly in a seaway, yet the most important defect is the slowness of delivering coal. On a properly and specially equipped collier, this no doubt would be bettered by the use of steam winch in hoisting the coal, instead of hoisting by hand, as was done in the experiment. There would also be used two jackstays, one on each side, running from either bow of the collier to the quarters of the cruiser.

Whether this device, with such improvements as may from time to time be suggested by experiments, is the one to be adopted for coaling at sea or not, remains to be decided by our brainy readers.

Any one who will devise a method of rapidly and safely coaling our cruisers at sea will add to the navy's efficiency and, no doubt, will receive an abundant reward in dollars from the government. BRAINARD.

Approaching Completion of the Manchester Ship Canal.

The deputy chairman of the company recently informed the Manchester Corporation that there was every probability of a waterway being opened for ships to the docks and wharves of the city on the first of January, and he quoted a letter written by the dredging master promising a minimum depth of 23 feet of water throughout the canal by that date. As an earnest of the fulfillment of this, we hear, says the *Engineer*, that a steamer reached Runcorn by the canal last week, which proves that the work of construction in the estuary is finished. This, from an engineering point of view, was the most harzardous and difficult portion. We congratulate the engineers on bringing it to a successful termination. On board the steamer were several of the directors of the Peninsular and Oriental Steamship Company, but with what object they paid the visit has not transpired. Manchester goods form a considerable portion of the tonnage carried through the Suez Canal, and at a public meeting in Manchester eight years ago, Monsieur De Lesseps told his audience that in his opinion the Suez Canal ended in Manchester. No doubt a direct trade will be done between Manchester and Bombay, and it is probable that the Peninsular and Oriental line will be early in the field. It is not six years since the first sod was cut at Eastham. The amount of work accomplished since then is astonishing; and when we consider the opposition that has been encountered from such powerful bodies as the Mersey Dock and Harbor Board and the railway companies as well as the elements, it is surprising to find the canal is so nearly finished. The weather has favored the contractors of late, as it did at the commencement of the work.

THE depth to which the sun's rays penetrate water has been recently determined by the aid of photography. It has been found that a depth of 553 feet the darkness was to all intents and purposes the same as that on a clear but moonless night. Sensitized plates exposed at this depth for a considerable length of time gave no evidence of ligh

Russian Exhibits.—Russia's projected government house was never completed, but her pavilion in the Manufactures building is so spacious that it serves the purpose in considerable measure.

One corner of this pavilion, which fronts upon the main avenue of the building, is in the form of a Russian church with green roof, bulb shaped tower, colored windows and religious pictures. At each side of the broad entrance to the pavilion, and in its center, stands a massive rhodonite vase. They are so tall as to be suitable ornaments in this largest of buildings, and are as beautiful in form as they are rich in color.

When, at last, one turns away from these, it is to notice on the right a curious and beautiful piece of furniture, a bookcase and cabinet combined, decorated with burnt work by Madame Semetchine, of St. Petersburg. The doors and panels are ornamented with portraits of Tolstoi and scenes from his life. The portraits represent him at different ages; the other pictures show him plowing in a field, writing in a plain room, and engaged in other avocations. The delicacy and finish of this burnt work is not excelled by that produced by a brush. One cannot but admire a woman bright enough to give us Americans an epitome of the life of her one countryman whose name is somewhat familiar even among the masses of our people, and in a form to attract universal attention.

Close at hand are the bronzes shown by the St. Petersburg firm of Stange. They are made from models left by the great sculptor Eugenius Lanceray, a Russian of French extraction, who died in 1885, at the age of thirty-seven. Of art training he had only what an amateur can get in the studios and galleries of Paris; but wandering in the Caucasus and the Crimea, and along the steppes inhabited by the Bashkirs and Kirghizes, he studied national life until he could represent it in enduring form.

Horsemen and horses are his subjects, and the figures are small—about the size of Barye's. They are all full of action; none is more spirited than that of Sviastoslaw. His head is bare, he sits his horse as if forgetful of it, and with sword in hand is arranging his troops; his expression is so animated that one almost sees the men falling into position before that commanding presence.

Among the most striking groups is that called "After the Battle;" his last and largest group, composed of graceful, dashing horses, is named "An Arab Fantasie." Many of these bronzes have been sold; the remaining ones are to be brought to New York when the Fair closes.

Near by there are many other little bronzes by other sculptors, whose names I could not learn. They are charming pictures of peasant life, but none are so fine as Lanceray's. The Russians show wonderful aptitude for this miniature work. Further evidence is given in a case which one might easily pass unnoticed, and yet which is full of interest. It contains quaint little figures, six or eight inches high, in the various occupations and positions which peasant every-day life affords; they are dressed in costumes barbaric in color and clumsy in form, but every pose is perfectly natural. The little people are made of *bread* by a lady in St. Petersburg. The notice under them is one of the numerous examples of curious English which one sees. Here it is: "I beg to considerer for my articles only those that have my initiales on the backside."

Close to the Lanceray bronzes is a large case containing very heavy fabrics, rich in texture and color, made in Moscow from silk cocoons grown in Southern Russia. The silk is wound on an Atwood machine made in Stonington, Ct.

For specimens of painstaking, patient work, nothing in the department equals the three "imperial appanages." They would be called cabinets in our language. They are made of highly finished light wood, have gilt decoration and marble tops, but their chief beauty is in the doors, which make the entire front of the upper part of the cabinet. These doors are mosaics of bits of marble almost microscopic in size and so perfectly matched that only the closest scrutiny shows how they are made. Italian mosaics which I have seen are coarse in comparison. One pair of doors represents a scene which might have been taken from an Amazon forest, as very likely it was. There is a mass of tropical plants, with birds and monkeys among them; the effect of a soft, hazy atmosphere is perfect; the touches of brilliant color in a bird's wing or a stray leaf add to the delightful picture. The base of this cabinet, as well as the ornamentation below the door, are also of mosaic, and upon the whole 14,558 days' work was spent. The mosaics of the other two "appanages" are very rich in color, but have a less elaborate design; they are simply birds of beautiful plumage upon a background of lapis-lazuli from the stone works at Petershof.

Close at hand are bowls cut from jades of a light shade, wonderful for size and finish. A very rich labradorite table and pedestals must be most tempting to people who can surround themselves with objects of enduring beauty. They are less showy than the superb malachite and gold tables which stand near them.

A significant gift shown among the work of the silversmiths is a magnificent dish in silver and gold given by the Cossacks of the Urals to the Czarewich. The perfection of workmanship which is attainable in the handling of these metals is shown in a gold salver with a silver napkin lying upon it, so exact an imitation of linen that one can hardly believe it to be an imitation.

The exhibit of the Imperial State Paper Manufactory is worth careful examination. It is the outgrowth of the use of paper money in the empire, begun about a century ago. The first bank notes were made in a little mill near St. Petersburg; but in 1818 the institution which has since grown to great proportions was founded. Its product is now taken both by the government and private concerns. In 1860 new buildings were finished and equipped with English machinery for the manufacture of paper, and with German printing presses, the buildings and plant costing two and a half million dollars.

The Minister of Finance appoints the director, who is at the head of the business, and the number of officials under him is regulated by law. The proceeds of the business, after expenses are paid, are divided equally between the government treasury and the employes. The manufactory also furnishes for their employes and their families 373 dwellings, a dining hall for 350, an elementary school, a chapel, a hospital with 30 beds, and physicians and attendants. The great establishment is on Fontanka Quay in St. Petersburg.

The pavilion in which its exhibit is placed is of Circassian nutwood, ornamented with panels of polished platane. This, as well as all the frames and showcases, were designed and made in the cabinet making department of the manufactory. The paper is made entirely of hemp and rags, hemp being the chief constituent of that used for bank notes. Specimens of the products shown are water-marked, hand-made, and machine-made in sheets, and the continuous web made by machine. The bank note paper has a silk net in the middle of the sheet, which is put into the pulp, and twenty-five looms are in use weaving this net.

The printing done in the establishment is illustrated in the form of these bank notes, postage and other stamps, bonds, drafts, etc. By means of a machine invented in 1891 by Mr. Orloff, an engineer in the works, colored figure printing from *cliches in relievo* is done. "This system of figured printing renders it possible to obtain various patterns and designs in many colors, gradually passing from one tint to another, from one stereotype and at one impression." (Statement made in pamphlet about the works, found in the exhibit.) The establishment makes all its own type and in the last two years has replaced much of the old by type made from original designs.

The display of copper and iron electrotypes includes a wide range of subjects; among them are Alexander the Great, a bass-relief from a marble in the Imperial Hermitage; Copernicus, a bass-relief in wax by Krynsky; shields, helmets, swords, and daggers of ancient and sometimes unknown origin, but elaborate in design; heads of Michel Angelo, Catherine II, M. Jacobi, the inventor of the electrotype process, and many others. The bust of J. N. Niepce and that of the Empress Marie Feodorovna are iron electrotypes without seams. The different photo-mechanical processes, heliogravure, photo-zincography, photo-relief, photo-lithography, and collotype are all illustrated by most interesting examples. The helio-engravings, nine in number, from originals by Chemesoff, Soutman, Vyscher and five other artists, executed by a special process discovered in the manufactory, are in the most prominent place on one of the sides of the pavilion. They are remarkable for their clearness and beauty.

In no section of the Fair did I see so much to indicate that large sales were being made as in the fur room of the Russian pavilion. The assortment was extensive: mink, sable, seal, and the less costly skins were all displayed to fine advantage, and women in stylish toilets found them fascinating when the mercury hovered among the nineties. They had the same air of business as had the lady who was inquiring the prices of the engravings in the Art Gallery and selecting certain ones because "they furnish more than large pictures."

(To be continued.)

© 1893 SCIENTIFIC AMERICAN, INC.

AN IMPROVED SCREW-CUTTING LATHE.

This lathe permits the operator to easily and quickly bring the cutting tool back to the exact position on the beginning of the cut, so that a perfect and uniform thread is quickly made and no time is lost in finding the beginning of the cut, as is the case with screw-cutting lathes of the ordinary construction. The improvement has been patented by Mr. James H. Paterson, Box 436, Ingersoll, Ontario, Canada. The lathe has the usual bed supporting on one end the head stock with spindle engaging the work, held

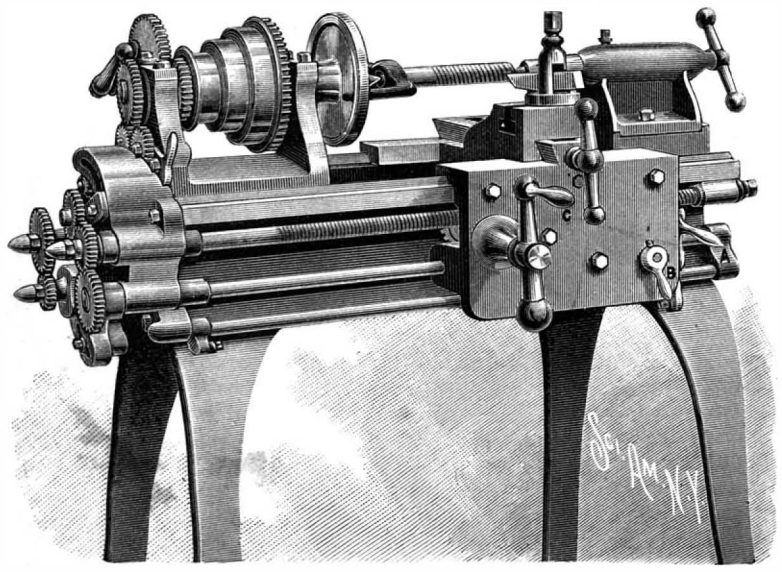

PATERSON'S SCREW-CUTTING LATHE.

at its other end in the mandrel of the tail stock, the cutting tool being mounted in the usual tool holder, transversely adjustable on the carriage sliding in bearings on the bed. Through the front of the carriage passes the feed shaft, journaled in bearings at the ends of the bed, and this shaft is engaged by a half nut sliding in bearings on the inside of the carriage by moving the handle, A, to a vertical position, the carriage being disengaged from the feed shaft when this handle is in a horizontal position. When the half nut is out of engagement with the feed shaft the carriage may be moved backward or forward by turning the handle, C, on a transverse shaft carrying a pinion meshing with a gear wheel on a short shaft turning in bearings in the carriage. The latter shaft has a gear wheel meshing with a rack on the bed, and is also adapted to be connected with a longitudinal auxiliary shaft journaled below the feed shaft, and forming the principal part of an intermediate mechanism for controlling the speed of the feed shaft, to permit of cutting any desired number of threads to the inch on the work, the number not necessarily being a multiple of the number of threads per inch of the feed shaft. This auxiliary shaft is thrown into and out of connection with the carriage by means of a bevel gear and pinion connection actuated by the handle, B. Connecting the auxiliary shaft with the feed shaft is an adjustable gear and clutch mechanism, and the arrangement is such that no backing belt or other means are necessary to catch the thread on the work, whether the thread to be cut is or is not a multiple of the number of threads per inch on the feed shaft.

Vanillin from Cloves.

Professor Jorissen and E. Hairs, noting the similarity in composition between vanillin and eugenol, have examined cloves and the essential oil obtained from them to ascertain whether vanillin was one of their constituents. An ethereal tincture of cloves was prepared and treated with solution of sodium acid sulphite. This solution, being separated, was then treated with a mineral acid and the sulphurous acid thus liberated removed, after which the mixture was agitated with ether. This, on being separated and evaporated, left a residue which gave off a strong odor of vanilla. A similar, crystalline residue was obtained on subjecting oil of cloves to the same treatment. The crystals were soluble in water, especially when warm, also in alcohol and ether. They were colored by ferric chloride, began to melt at 79°, and sublimed readily. The yield was very small, so that an extended examination was not possible, but the investigators consider that the physical and chemical characters of the product, so far as they have been ascertained, indicate its identity with vanillin.—*Bull. de Pharm.*

AN AUXILIARY CUT-OFF FOR ENGINES.

This is an improvement capable of attachment to any engine, whereby the engine may be stopped in a moment from any point in the building. It has been patented by Mr. John H. Tennyson, of No. 54 Charlton Street, New York City. The small figure represents a longitudinal section through the governor driving gear, illustrating a shifting form of gear, and the gear, practically in two sections, in its shifted position. A beveled gear at the lower end of the governor stem constitutes one section, and another beveled gear on a hub sliding on a guide rod in a casing forms the other section, there being on the hub a clutch sleeve with trunnions passing through blocks sliding in the arms of a fork, whose shank, at its lower end, is adapted to engage with a bolt. When the stem of the fork is in engagement with the bolt the governor gears will be in mesh, which is their normal position. A spiral spring tends to draw the shank of the fork out of engagement with the bolt, and, to accelerate the movement of the fork when released from the bolt, a weight is also attached to the front portion of the shank near its lower end. At the rear of the governor casing is a standard in which is journaled a rock shaft with a rigidly attached curved trip arm, from which are suspended weights capable of drawing the arm downward and rocking the shaft. The arm has at one side a friction roller adapted to contact with the governor crank, carrying the shifting rod connected with the governor sleeve to draw downward the governor pawls. The governor crank also carries the usual rocking bar, to the opposite ends of which the ordinary cut-off rods are pivotally connected. The cut-off valve has stops, and when

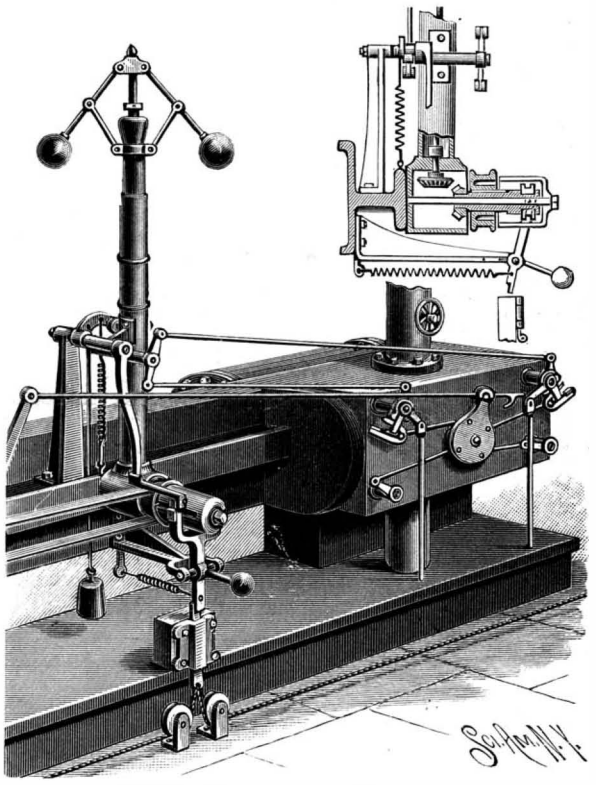

TENNYSON'S AUXILIARY CUT-OFF.

the cut-off rods are shifted by the trip mechanism one of the stops will engage with a crab to prevent the pick from touching the valve fingers, insuring a positive and permanent cut-off. To make the forward movement of the trip arm as rapid as possible, such movement is aided by one or more springs. A lock arm extending downward from the rock shaft has at its lower end a friction roller resting on a lock bar secured to the upper end of one member of the fork connected with the shifting governor gear, normally holding the rock shaft in such position as to prevent the trip arm from engaging with the governor crank. The bolt which engages the shank of the fork is connected by chains or cables with any desired part of the building, and by withdrawing the bolt the two sections of the driving governor gear are separated, thus silencing the governor. At the same instant the lock bar is withdrawn from under the lock arm and the weights and springs draw downward the trip arm, engaging the governor crank and causing the governor balls to be closed, the crank also shifting the rocking bar of the cut-off rods to cause the valves to cut off. The device may be applied to any cut-off engine or any ball governor.

Curious Origin of a Fire.

The other day a heavy delivery wagon backed up in front of an Eighth Avenue furniture store. The smoothness and slant of the asphalt gave greater momentum than was expected, and the hind wheels struck the curb with a crash. The contact of stone and iron drew out sparks. Some of these flew into a wisp of packing hay that soon gave forth smoke and flame. A bucket of water subdued the blaze, but, as a fireman remarked, it was an interesting object lesson on one of the mysterious ways in which serious fires sometimes start.

TORSION BRAIDED WIRE MATTRESSES, PILLOWS, CUSHIONS, ETC., SHOWN AT THE EXPOSITION.

The articles shown in this exhibit presented a degree of novelty and utility that caused them to attract much attention, and to receive the highest award. They are the product of a comparatively new manufacture, originating in the invention, in 1882, by Dr. Henry Weston, of Philadelphia, of the cylindrical braided wire pillow. The successful application of the principle was not attained without further costly experiment, and the invention, by Mr. Joseph L. Wells, of the braided wire torsion spring, by which perfect resiliency is obtained, and whereby pressure on any part and to any degree causes the wire to twist instead of bending or breaking. Mattresses, pillows, cushions, etc., made according to this improvement, afford a gentle, softly yielding support, but they do not become heated, as is the case when they are filled with feathers, hair, moss, or other material, for each slight movement changes the air beneath, and they do not absorb odors, become musty, or retain perspiration or disease germs. The mattresses and pillows are covered with a light covering of fine curled hair or other material, which may be removed for cleaning when necessary; but there is little to attract bugs, moths, or other insects. The wire is heavily tinned to resist rust, and the articles are all well made of so excellent a quality of steel wire as to be practically indestructible. The best known doctors and surgeons in the country have written very strong testimonials as to the superiority of these goods for hospital service, and for general use their adaptation is equally obvious. In warm weather, especially, they constitute a positive luxury. These goods are made only by the Weston & Wells Manufacturing Company, 1110-1116 Noble Street, Philadelphia, Pa.

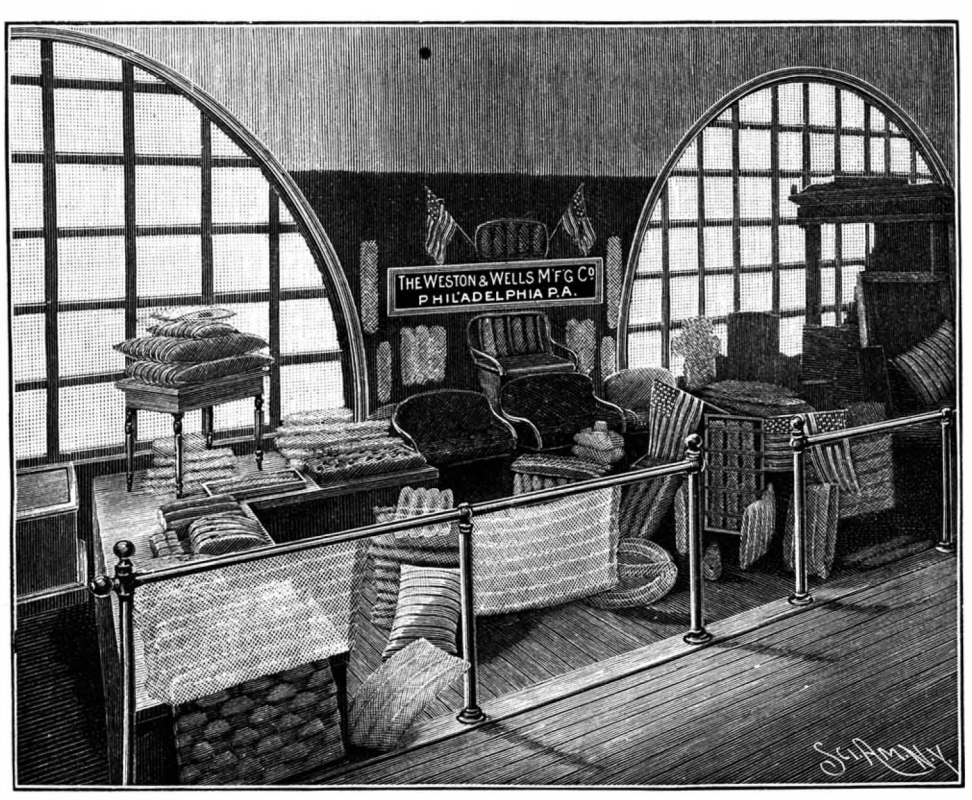

THE WORLD'S COLUMBIAN EXPOSITION—EXHIBIT OF THE WESTON & WELLS MANUFACTURING COMPANY, OF PHILADELPHIA PA.

ASPHALT pavements were first laid in Paris in 1854.

© 1893 SCIENTIFIC AMERICAN, INC.

A KNEADING OR MIXING MACHINE.

This machine is adapted for kneading or mixing paste of any description, especially such as is used in making macaroni. The machine was awarded a medal at the Columbian Exposition, and each machine makes between 3,500 and 4,000 pounds a day. The improvement has been patented by Mr. Auguste Witz, No. 138 James Street, New York City. Mixing rolls, which may be of the usual construction, are journaled in hangers forming part of a suitable frame, and the mixing pan is connected with a central shaft journaled in upper and lower cross beams of the frame. The lower cross beam is adjustable as to height by means of an adjusting shaft, whose lower end is threaded, the upper end having a hand wheel. Around the pan at the bottom are teeth adapted to engage a gear on the lower end of a vertical shaft, to be driven according to any of the usual methods of applying power. The shovels in the bottom of the pan, which constitute the principal feature of the invention, are of sheet metal, bent upon itself to a substantially U-shape in cross section, the upper member considerably overhanging the lower member. The shovels are placed on opposite sides of the central shaft, their contracted portions facing in opposite directions, and one shovel is located near the center of the pan while the other is near its periphery. The shovels are held stationary within the pan by a shank secured to the hangers, and the reduced end of the shovel near the periphery of the pan may be brought practically in engagement therewith, while the pointed end of the opposite shovel is located a predetermined distance from the center of the pan. As the pan is revolved, the outer shovel curves the outer edge of the paste upward and toward the center of the pan, the inner shovel also curving the inner edge of the paste over on the mass, which is thus presented to the rolls in

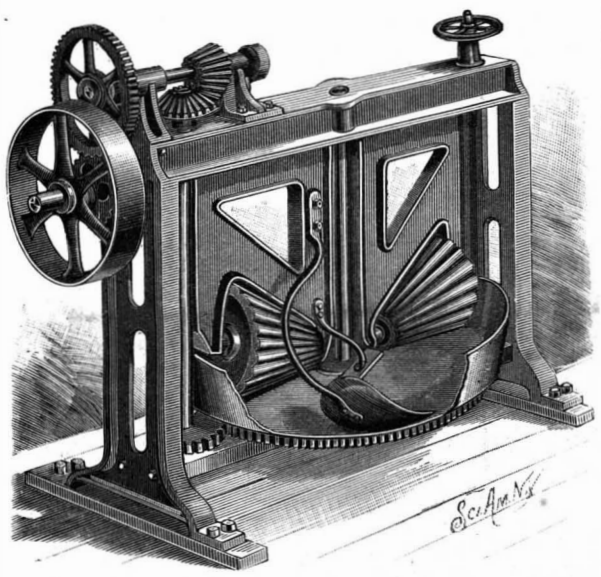

WITZ'S KNEADING OR MIXING MACHINE.

such manner that all the particles will be thoroughly and effectively operated upon. A diagonally placed central shovel returns to the mass any fragments which may be thrown into the middle of the pan.

A CHEAP AND NOVEL ROAD BED.

An invention designed to facilitate the construction of improved roads and highways is shown in the accompanying illustration, and has been patented by Mr. John Platten, of Fort Howard, Wis. The road-bed is made with a crib formed of transverse parallel planking, on top of which are secured parallel longitudinal stringers, a filling of loose earth, gravel or broken stone being compacted between the planking and the stringers to form the road proper and completely conceal the crib, the latter protecting the road material from lateral displacement. A greater or less number of stringers may be used, as desired, and the timbers and planks may be treated, if preferred, with any cheap preservative from decay. The impact of travel on such a road is designed to thoroughly pack the ballast material about the crib frame and render the road solid and durable.

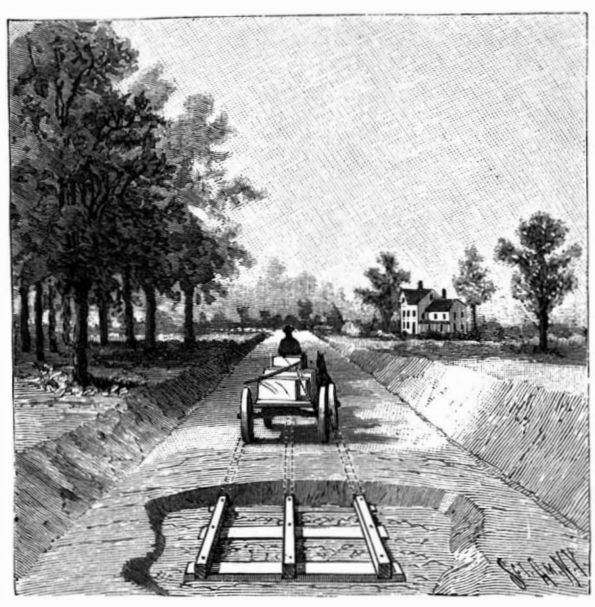

PLATTEN'S UNDERGROUND TIMBER ROAD.

AN IMPROVED STEAM ENGINE VALVE CHEST.

This valve chest is adapted for convenient application upon the valve seat of a slide valve steam engine, to convert it into one on which multiple rocker valves

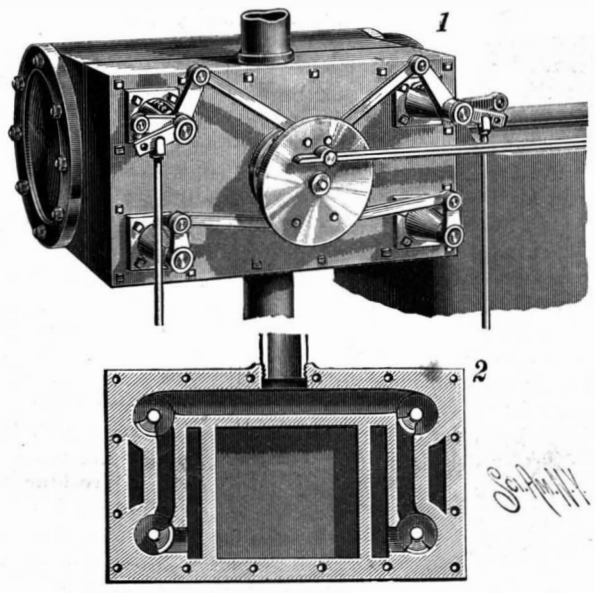

MYERS' STEAM ENGINE VALVE CHEST.

and their actuating gear can be used. The improvement has been patented by Mr. William H. Myers, of No. 103 Freeman Street, Brooklyn, N. Y., and has been for some time in practical and highly satisfactory use. Fig. 1 shows the application of the improvement, with the rocker valve actuating gear, Fig. 2 being a sectional side view of the valve chest and valves. Extending along one face of the cylinder is the elongated valve seat, with the usual live steam and exhaust ports in its face, the ports being duplicated, so that there will be a pair near each end of the cylinder. The valve chest is adapted to fit upon the valve seat and conform at its outer edge with the margin of the latter, the face of the chest having contact with the seat being made true and steam tight, and the chest being secured upon the cylinder by studs or bolts. There are two transverse steam passages near each end of the chest, the outer one of each conforming with the live steam port and the inner one with the adjacent exhaust port, a rectangular central cavity and a smaller cavity near each end rendering the valve chest light and yet sufficiently strong. Near each of the four corners of the chest are transverse cylindrical steam chambers for the reception and proper action of the rocking valves, the pair of chambers at the top receiving live steam alternately from the live steam duct in the wall of the chest, and the steam passage at each end of the chest extending to one of the lower transverse chambers, which are designed to relieve the cylinder of exhaust steam by the proper action of the valve. The lower transverse chambers are intersected by branches from the exhaust steam passages, and a rocking movement of the valve permits the escape of steam into the exhaust duct. The rocking valves are set as shown in Fig. 2, one live steam port in an upper chamber being open when the one at the other end of the cylinder is closed, and in the lower chambers the valve directly beneath the opened valve is closed, while that beneath the closed valve is open. The rocker valves are actuated by a gear of well known construction, comprising a rotatably supported crank disk rocked a proper degree by an eccentric rod, from an eccentric disk on the main shaft. Downwardly extending rods enter dash pots (not shown) and crank arms connect each live steam valve with a governor, completing the rocker valve gear.

To Soften and Whiten the Hands.

Borate of soda	3 ij.
Glycerine	3 iv.
Lanolin	ʒ j.
Eucalyptol	3 j.
Ess. of bitter almonds	m xx.

Apply at night, and afterward dust the hands with Indian chestnut flour, and cover with gloves.—*Med. Press.*

Early Chemistry.

Long before chemistry became a science many of its processes and apparatus were in common use. Professor H. Carrington Bolton has made a list of some of these, finding that the Egyptians were acquainted with the process of glass making at least as far back as 2500 B. C.; that crucibles of the 15th century B. C. are now in the Berlin Museum; and that siphons also were used in the 15th century B. C. Blowpipes and bellows were early employed. The earliest chemical laboratories now known were those of the Egyptian temples, in which the priests prepared the incense, oils, etc., used in the temple services. The Bible contains frequent chemical allusions. Cupellation is plainly described by Jeremiah, metallurgical operations by Job, Ezekiel, and others, and bellows by Jeremiah. Geber, the Arabian physician of the eighth century, wrote minutely of chemical processes. He described solution, filtration, crystallization, fusion, sublimation, distillation, cupellation, and various kinds of furnaces and apparatus. Perhaps the earliest drawings of strictly chemical apparatus are the figures of distilling apparatus in a Greek papyrus of the 11th century. An alchemist's laboratory of the 6th or 7th century was uncovered in Egypt in 1885, and its contents included a bronze furnace, about fifty bronze vases with beaks, and some conical vessels resembling sand baths. The balance as an instrument of precision reached a high development under the Arabians as early as the 12th century, when very accurate specific gravity determinations were described.—*Ceylon Advt.*

AN ELECTRIC PASSENGER ELEVATOR AT THE EXPOSITION.

An exhibit which won a medal for its superior merits and in a notable degree was made to serve the public convenience, while at the same time illustrating one of the most recent and valuable applications of electricity, is shown in accompanying illustration, and was made by Messrs. Morse, Williams & Co., of Philadelphia. The exhibit was well planned and located to permit the inspection of parts to a sufficient degree to afford an understanding of the working of this very simple and efficient passenger elevator, in which is employed the improved Hindley worm gearing, which has been made a specialty by this firm for

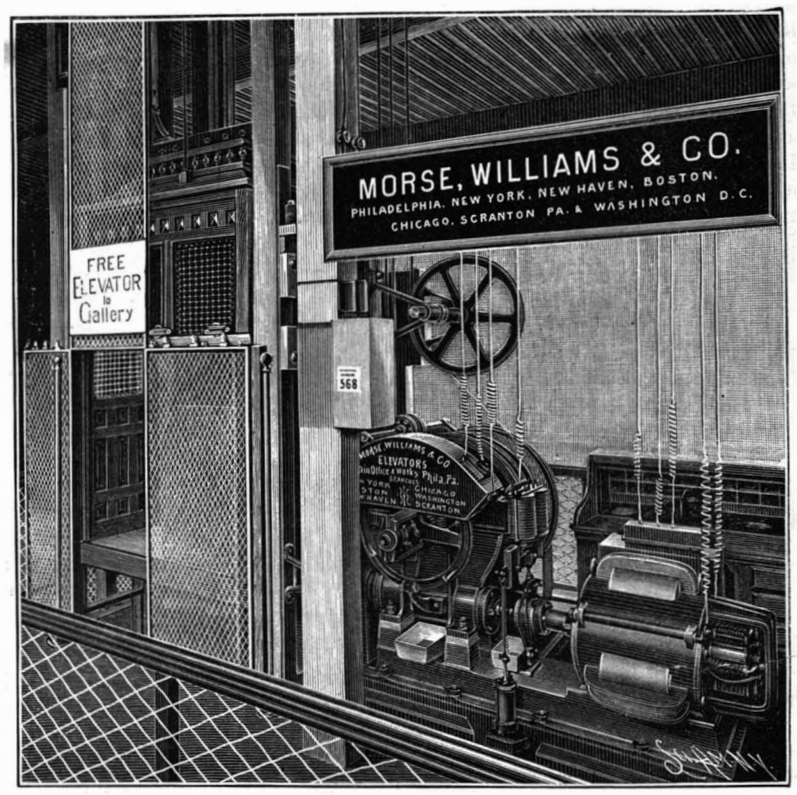

THE WORLD'S COLUMBIAN EXPOSITION—EXHIBIT OF MORSE, WILLIAMS & CO

years. The motor is attached to the worm shaft by means of a coupling, the shaft being provided with a powerful double shoe brake, which is released by the action of an electro-magnet and applied by a weight; so that in case the electric current should be accidentally cut off, the brake could be instantly applied to stop the machine. The brake also acts as a governor to check the descent of the car, should it attain too great a speed. The motor is of the low speed, multipolar type, with self-oiling bearings and carbon brushes, requiring a minimum of attention. The reversing switches and controlling apparatus are of simple and improved forms, their action causing the elevator to start easily and gently with and without a load. The makers claim that the average of current used, both in raising the load and lowering the empty car, is less than in any direct electric elevator in the market. The machines are designed to raise average loads at speeds as high as 250 feet a minute. Besides these electric elevators, the firm are also manufacturers and builders of hydraulic, steam, belt, and hand power passenger and freight elevators, as well as hoisting machinery, dumb waiters, automatic hatch doors, etc.

© 1893 SCIENTIFIC AMERICAN, INC.

A GREAT AIR COMPRESSOR AT THE FAIR.

Our illustration represents a plant employed by the World's Fair Commissioners to supply compressed air to exhibitors requiring air power. It is itself an exhibit by the Ingersoll-Sergeant Drill Company, of New York, and was continuously in operation throughout the Fair, furnishing compressed air to the Baldwin Locomotive Works, the Westinghouse Air Brake Companies, and others who exhibited their locomotives, air brakes, and other machinery in full operation by means of compressed air. This compressor is the crowning work of many years' experience of the company in this line, and embodies a great many improved features, the excellence of which has been attested in their widely extended practice. The plant consists of a cross compound Corliss condensing engine, cylinders 18 and 34 inches, having a stroke of 42 inches. The two air cylinders are each 18¼ inch bore and 42 inch stroke, driven direct from the piston rods of the engine. The free air, before admission to the cylinder, is taken from the point most favorable as to dryness, freedom from dust, lowness of temperature, etc., and is admitted to the air cylinder through a tube which also acts as a piston guide rod. The air inlet valves are large wrought iron rings, which open and close by the momentum caused by the movement of the piston, giving a large area of inlet with but a small throw of the valve, and reducing clearance loss to a minimum.

The cooling is effected by a new form of water jacket, the construction of the air cylinders admitting a complete jacketing of the heads and discharge valves, thus presenting a large cooling surface to the compressor at the end of each stroke where the air is hottest. By means of a new unloading device a uniform pressure is maintained in the receiver, and a uniform speed of the engine, by connections with a discharge valve on each end of the air cylinder, a weighted safety valve being connected with the receiver. When the air pressure gets above the desired point the valve lifts and the air is exhausted from behind the discharge valves, thus letting the compressed air at full receiver pressure into the cylinders at both ends and preventing the air cylinders from doing any work. The pistons in the cylinders move in equilibrium as the air passes from one end of the cylinder to the other through the discharge valves, the governor keeping the speed uniform, and there being no surplus air blown off from the receiver. A slight reduction of pressure in the receiver releases the discharge valves, when the air rushes in, the governor puts on more steam, and the work of compressing air goes on.

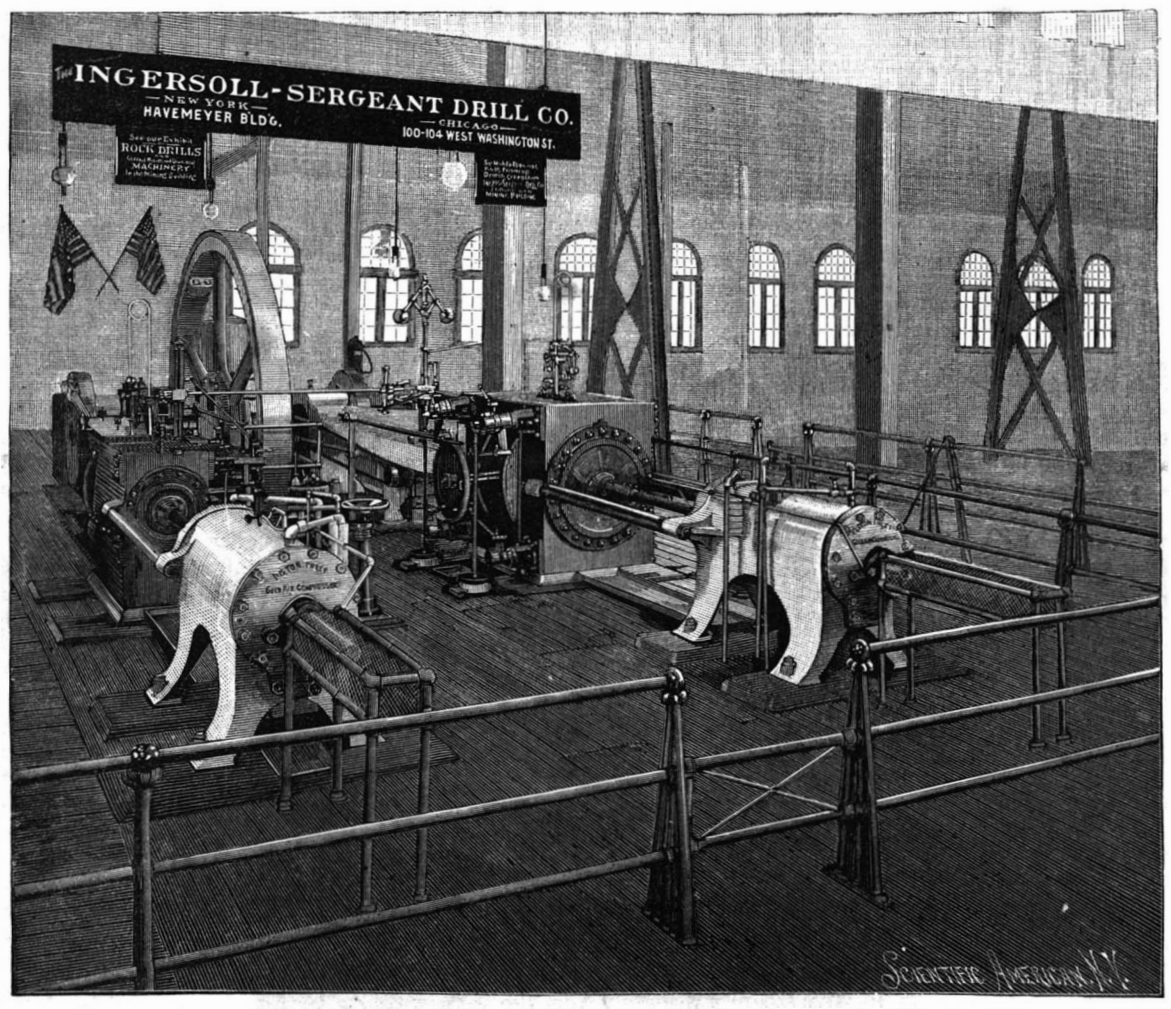

THE WORLD'S COLUMBIAN EXPOSITION—THE INGERSOLL-SERGEANT DRILL CO.'S AIR COMPRESSOR.

In the designing of these compressors and engines excellent taste has been shown, and all steam pipes are put below the floor, while the feet of the cylinders are covered, giving the whole plant a neat and uniform appearance. The ends of the cylinders, cylinder heads and steam chests, with all the turned parts about the valve motion and connecting rod, are beautifully polished.

This compressor has received the award from the World's Fair judges, and has been sold to a foreign gold mining company, to be exported as soon as the Exposition closes.

The Great Playa de Oro Placer Fields.

It is altogether probable, says the *Mining and Scientific Press*, that the coming year will witness the consummation of a placer mining project in South America by American capitalists that fairly rivals the largest schemes ever projected by California hydraulic miners, and that in its ultimate fruition is expected to exceed in dimensions and results the largest single similar enterprise undertaken anywhere in the world. The Playa do Oro placer fields in Ecuador are believed to be the richest and most extensive new properties yet discovered, and the work of development has been undertaken by an investment and in a manner that indicates both the good faith of the owners and their thorough conviction of the value of the placers.

The Playa de Oro property is about 11 miles distant from the town of Concepcion, as the river flows, and is on the Santiago River, a large and rapid stream flowing through the estate in a westerly direction to the Pacific. It is from 500 to 800 feet above sea level. The property forms a parallelogram, comprises 20,000 acres, and is joined by the Uimba estate on the north and the Cayapas River on the south. Gold-bearing beds cover the whole extent of the property, but only the gravel banks of a thickness of from 30 to 80 feet it is proposed to work. From the separate reports of the several engineers who have made personal survey and examination of the gravel beds, the following statements are taken: The gravel banks are exposed everywhere along the banks of the river; in the numerous cuts made by the natives in their efforts at mining, which is their only means of subsistence; along the gulches (quebradas); and everywhere that the soil, which averages about four feet in thickness, has been removed. The auriferous gravel beds average about 50 feet in thickness and only in one place was the bed found but 15 feet thick, while in many places it is 80 feet. The gravel is auriferous throughout, the presence of a small percentage of clay having prevented the bulk of the gold sinking to the bedrock, a soft formation, apparently of marine origin. The elevation of this bedrock above the outletting streams varies from 20 to 100 feet, insuring everywhere ample dump for tailings. As the gravel here contains no pipe clay, hard cement or large bowlders, it can be broken down and washed with a moderate head of water. No bedrock tunnels, derricks or powder blasting will here be required.

A cut in the Medio Mundo bank, near the town of Playa de Oro, has been worked back some 300 yards from the river through gravel 45 feet thick, exposing the bedrock for that distance. It shows a good grade for sluices and dumps, its elevation being 50 feet above bedrock, and washed by natives in their crude way yielded 97½ cents gold. Other washings of single cubic yards yielded various amounts. But the most satisfactory test has been made within the past six weeks under direction of Engineer Lord. Eighteen cubic yards were measured, worked and washed through sluices in exactly the same manner as it is proposed to develop the placers. The yield was 38 cents per cubic yard.

Rains in Ecuador are constant, and the water supply is enormous. At the town of Playa de Oro the Santiago River (500 feet wide) averages 300,000 miners' inches of water of 2,160 cubic feet each in 24 hours, or 7,500 cubic feet per second. The water for the mines will be taken from a branch of the Santiago (Rio Francklyn) at a sufficient elevation to give a large head. The river at the point where the initial canal will be built is 330 feet above bedrock at the placers.

The extent of the gravel beds is prodigious. The property covers about 60 square miles, and it is roughly estimated that there are about 1,600,000,000 cubic yards of gravel between bedrock and the grass roots. If there is an average gold value of 38 cents per cubic yard, the value of the deposit is $600,000,000! It is thought that several million dollars per year can be secured if the banks are worked at the capacity of the hydraulic appliances proposed to be put in. These figures stagger belief, but they seem to be justified. It is estimated that gold can be secured at an average of three cents per cubic yard. There will be no trouble about the disposal of the debris. There are on the ground, or purchased and about to be shipped, six miles of iron piping and four giants. One of these latter is 9 inch, which indicates pretty clearly that the company propose to wash out a great deal of gravel.

The Use of Copper Among the American Indians.

An article by R. L. Packard in the *American Antiquarian* says that careful investigation seems to show that at the time of the discovery of America copper was used by the North American Indians only as a precious metal and for ornamental purposes, and had not reached the stage of industrial use, as it had among the Aztecs in Mexico. There is, moreover, no evidence to show that the northern Indians had any knowledge of ore working or smelting, and it is almost certain that all the copper they possessed was found in the metallic or native state. There is nothing to show that they were aware of the existence of copper ore as a source of metal. No remains of smelting places, or slag, or other indications of metallurgical operations have yet been found. The quantity of copper which the Indians possessed at the time of the discovery, although the metal was diffused over a very wide territory, was very small as compared with stone. This is shown by the relatively small proportion of copper implements in the principal collections, as at the Smithsonian Institution and others. The larger numbers are found in Wisconsin, and this is accounted for by the fact that Wisconsin is directly south of the Keweenaw district in Michigan, where the largest beds of native copper occur. In these beds the copper shows as such in the rock, and the ancient miners had only to follow down a promising outcrop showing metal for a few feet, and hammer away the rock from the copper to secure the latter. When they came upon a large mass they were compelled to abandon it after hammering off projecting pieces, because they had no tools for cutting it up and removing it. Several instances of this sort have been found. The ancient mines were not real mines, not being underground workings, but merely shallow pits or trenches, and sometimes excavations in the face of a cliff. At the time modern mining began they had become mere depressions in the ground. All these workings when examined contained stone hammers or mauls, a few wooden shovels, remains of wooden bowls for baking, birch bark baskets, and some spear or lance heads and other articles of copper.

Wire Tramways.

This forms the subject of a study and investigation with which the Societe Industrielle de l'Est, in France, has charged two of its members, one of whom, Professor Thiery, lately forestalled the definite report by a lecture delivered at Nancy. He concluded by giving the cost of transport on eight wire lines, the mean of which, 57 centimes per ton per kilometer, or 17 cts. per ton per mile, happens to be exactly that of the wire tramway lately erected between Custines and Marbache for carrying ore to the Pont-a-Mousson blast furnaces.

In addition to the low cost of transportation, Professor Thiery enumerated the following economical advantages of wire tramways: They are independent of the land on which they are erected, and which may be hired instead of bought, and cultivated like adjoining portions; there is sufficient height for tipping to dump; they may be established on any land where roads or railways would be impossible, notwithstanding natural obstacles; they will work in any weather, not being interrupted by snowstorms or floods; the loading and unloading is effected in a very simple and practical manner; they may be worked by untrained laborers; and, lastly, the energy stored up in descending may be utilized for ascending, which is not the case with other means of communication.

© 1893 SCIENTIFIC AMERICAN, INC.

EXHIBIT OF BRUSH ELECTRIC COMPANY.

Near the southwestern corner in the Electricity building, at the World's Columbian Exposition, is a small staff structure of Greek architecture, apparently built of the purest Italian marble. This structure is surrounded by generators, dynamos, motors and a variety of electrical apparatus displaying all the manufactures of the Brush Electric Company, of Cleveland, Ohio, while the structure itself serves as the office of this company. A general view of this exhibit and of the structure is seen in our first page illustration.

The lighting of this office is one of the prettiest pieces of interior illumination at the Exposition. The room is circular in form, with a diameter of eighteen feet, and with a semicircular domed ceiling. In the center is a column rising through the ceiling. The entire interior is richly colored, and the domed ceiling is so painted as to give it a cloud effect, with a deep blue sky background. An artistic cornice marks the joining of the wall with the ceiling, and the incandescent lamps that furnish the light for the room are concealed behind this cornice and out of the line of vision. There are altogether fifty-two lamps used for this purpose, connected to four circuits, so that the amount of light can be readily regulated, as is frequently required in theaters and other large halls This plan of lighting was devised by Mr. I. R. Prentiss, of the Brush Company, and as adapted to this room has twelve lamps on two circuits and fourteen on the other two. By this manner of illumination there is no need of large resistance coils when the amount of light is reduced, and there is a corresponding saving in the amount of power required when a lesser amount of light is used. The only reflector used is a piece of tin on the inside of the cornice. The rays of light, as shown in the illustration, are thrown on the domed ceiling, and from there diffused throughout the room, giving an exceedingly bright yet soft, mild light that is not in the least trying to the eyes.

The Brush Company is known the world over for its arc lighting apparatus, and all systems of arc lighting now used are outgrowths of the inventions of Mr. Brush. This is the pioneer company in arc lighting, and it is a remarkable fact that the first Brush dynamo, built in 1876, an illustration of which is given, does not differ, except in unimportant features, from the very last Brush dynamo shown in the lower left hand corner. The chief difference is that the early machine had a Gramme armature, while now a laminated iron core armature is used and open coils. This latest dynamo is the largest arc dynamo ever constructed in this country, and probably in any other. It has a capacity of 120–125 full arc or 2,000 candle power lights. It makes 525 revolutions a minute, and gives 9·6 amperes at 6,250 volts. It is a four-pole machine, and uses two sets of brushes. There are 24 bobbins, and the commutator has 3 rings of 8 segments each. The field magnets are of soft steel and the frame is of cast iron. The shaft is directly connected to a Willans engine, which is set upon the same base, and which works at a steam pressure of 160 pounds. This is believed to be the first direct-coupled arc machine ever built. Heretofore the largest sizes of arc dynamos that have been built have been 65 lights, and several machines of this capacity are shown in this exhibit, as well as the smallest, which has a capacity of one full arc light. Distinguishing features of the Brush dynamos are flexibility, simplicity, and ease of repair. The usual sizes of dynamos have 12 bobbins, making practically three machines in one.

Several dynamos are displayed in this exhibit other than those already mentioned, which are of particular interest, especially the first one that Mr. Brush constructed. Other dynamos are shown that have been run for twelve or fifteen years and have required no further repairs than new brushes and new packing for the bearings.

The display of arc machines comprises twelve sizes—all of the regular sizes manufactured by this company. In addition to this display, the Brush Company has a very handsome working exhibit in the electric plant in the Palace of Mechanic Arts, where there are 16 dynamos, each of 65 lights capacity, forming part of the plant used for lighting the Exposition grounds.

The same system of flexibility that is made such a feature in the Brush arc lighting apparatus is adapted to the alternating system of incandescent lighting, which is now an important feature of this company's business. In the lower right hand corner of our illustration is shown an alternating dynamo of 3,000 lights capacity, giving a current at 2,000 volts and coupled direct to a 250 horse power Brush motor. The armature in this dynamo is stationary. There are ten bobbins, and when coupled in series, give the full output. But this machine as exhibited has the bobbins connected in multiple arc. The incandescent lamps used to illuminate the interior of the office structure derive their current from this dynamo without the intervening use of a transformer. The motor used to run this alternator is a 250 horse power, 220 volt four pole direct current machine, which derives its energy from the Exposition circuits. This alternator has iron segments and uses carbon brushes, and is so constructed as to have great ventilating capacity. Two other alternators are exhibited, one of 1,000 light capacity, the other of 720 lights, and there is also a display of transformers varying from five lights to 225 lights in capacity.

Still another feature of this exhibit, and which illustrates an important feature of the manufactures of the Brush Company, is direct current incandescent lighting apparatus. Four sizes of these machines are shown, the largest one being a 2,000 lighter. A special feature of this machine is that there is only one turn of wire on each bobbin, giving what has always been regarded as a perfect type of such a machine. The 1,000 lighter has two turns of wire and the smaller machine more. This 2,000 lighter has great efficiency and generates a very small degree of heat, because of this and other new features in its construction.

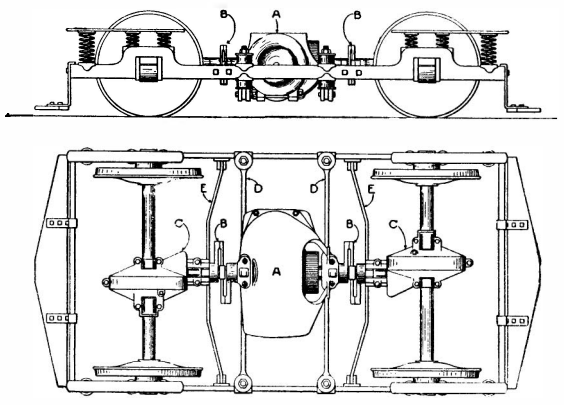

THE SPERRY ELECTRIC RAILWAY SYSTEM, PLAN AND SECTION.

The demand for electric power has led to the introduction of power generators and to the making of motors adapted to various purposes to be used in connection with their generators. In the rear of the office structure, but not shown in the illustration, is displayed a generator of 130 horse power capacity. It is compound wound and gives a direct current at a potential of 1,000 volts. It is a type of generator that has come into extensive use for heavy work—the Calumet and Hecla Mining Company using five of them in its mine pumping plant. Several types of motors are shown, one of which, called the mining motor, is very compact and is steel-clad. It is a 220 volt machine and is of very slow speed, the one exhibited being 9 horse power and running at only 700 revolutions. Motors for crane and elevator service, as well as motors adapted to other uses, are also to be seen here.

The exhibition of switchboards is a very fine one. There is a large switchboard adapted to an alternating current plant of 30,000 lights capacity. This board is complete in all of its apparatus, and has just been sold to go to Manila, Philippine Islands, in a plant which the Brush Company is now equipping there. Arc and direct incandescent switchboards are also shown. The principle of flexibility which pervades the Brush apparatus is to be found in the switchboards, as everywhere else. These boards are made in panels, each panel representing a dynamo. When another machine is added to the plant, the end panel containing instruments and other apparatus is moved along far enough to permit another panel being placed between that and the panels already in position, so that no change of wires or other unnecessary work need be done to connect up. Another feature and one of much importance, especially on an arc switchboard, is the placing of all live currents on the back of the board, so that the veriest tyro could handle this switchboard and not risk receiving a shock, unless he were careless enough to touch the terminals at the switch.

The space occupied by the entire Brush exhibit is surrounded by a string of arc lamps, and in the evening when these lamps, all of which are of 2,000 candle power, are lighted this exhibit is one of the most highly illuminated sections in the Exposition. The importance and value of the Brush patents on double arc lamps to the commercial world is briefly stated by a modest sign board shown at the right of the office structure, which says, "All double arc lamps used by the Columbian Exposition are furnished by the Brush Company." Another sign board, equally modest, hints at another line of work which has received a great deal of thought and which owes a great deal to the fertile brain of Mr. Chas. F. Brush. This sign reads, "All storage batteries used in electric launches and in the Columbian Exposition are manufactured under Brush patents."

Nearly all the Brush apparatus in Machinery Hall and in their exhibit was sold early in the summer for delivery immediately on the closing of the Exposition, which shows that this apparatus has lost none of its popularity.

The Brush Electric Company does not sell street railway apparatus, but it has allied with it, though independent so far as organization is concerned, two companies that have distinctive apparatus, each of its own peculiar type. In the foreground at the extreme left of the illustration of the general exhibit is seen the exhibit made by

THE SPERRY ELECTRIC RAILWAY COMPANY.

The Sperry system represents a radical departure in electric railway work. This system consists of a single motor mounted flexibly upon a truck frame in the center of the truck. This flexible mounting consists of four rubber cushions between the motor supports and the frame of truck. The motor is thus relieved of all strain and jars and concussion of the axle incident to street railway traffic. By mounting the motor in the center of the truck, the weight on the axle is reduced to a minimum. There is only about two hundred pounds of weight over each axle. It will be acknowledged by all engineers, or those acquainted with railway traffic, that if both axles of the truck are connected with one source of power instead of two, a large increase in traction is thereby gained. This method will soon become indispensable with electric street railway construction, because all of the traction that is possible must be secured. A coupling between each axle and the motor is required, and, from necessity, the coupling must be flexible under some conditions and rigid under others. Mr. Sperry has perfected a coupling that meets these requirements, and a number of them are exhibited. This coupling will allow the pinion shaft, on which is located the "driven," and the motor shaft, on which is located the "driver," to become thrown out of alignment to a considerable extent, while at the same time all of the torque delivered by the driver is transmitted to the driven. This is a very important feature of this equipment, and answers all the objections which have been made heretofore regarding a single motor equipment. In fact, this equipment will round the shortest curves with great ease and with less power required than with any other system.

To show its superior qualities as a hill climber, a grade was constructed on one of the tracks at the World's Fair, and a dynamometer test was held, at which the Sperry car pulled 4,700 pounds on the drawbar before the wheels slipped. A double motor equipment, weighing considerably more, and thereby having that much advantage, was tried, but this equipment only pulled 2,075 pounds before the slipping point was reached. The grade was 12·4 per cent, and the test was witnessed by all the judges of the Electrical Department.

The Sperry Company claim that they rate their motor very conservatively, and that it is built to stand any sudden excess of work which it may be called upon to perform, which in some emergencies amounts to two or three times the rated capacity of the motor.

Street railway traffic is the most severe traffic in the world on machinery. In the first place, the electrical machinery placed under a car is always in crude hands. No special electrical education is considered necessary for a motorman. A man may be a farmhand for forty-five years, and after a few days' run on the road with another motorman he is considered capable of handling and manipulating the electrical apparatus designed to propel a street car. Again, very little grading is done in laying a road, and the machinery must be so designed as to go uphill and down hill continuously. Practically no limit to the load is prescribed, and in most cases the roadbed is allowed to become sadly out of repair before any steps are taken to improve same. Taking these conditions together with the speed at which electric cars are being run, short curves and frequent railway crossings, it is no wonder that the strains incident to street railway traffic are more severe than on any other class of machinery.

The motor designed by the Sperry Company is made so as to stand all the possible strains that can be put upon it, and every feature of the equipment is designed and built with a clear understanding as to the uses to which it is to be put.

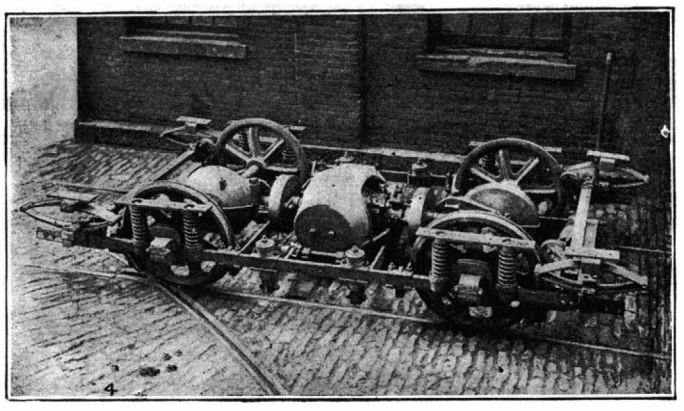

TRUCK AND MOTOR OF SPERRY ELECTRIC SYSTEM.

THE SHORT ELECTRIC RAILWAY COMPANY'S EXHIBIT.

The special feature of this display, as you will readily see, is a generator in the center. This is a 450 horse

© 1893 SCIENTIFIC AMERICAN, INC.

power 500 volt six pole machine, designed especially for electric railway work. The comparative size of the armature of this generator is readily seen from the armature exhibited in the foreground. This shows the manner of its construction and also illustrates one of its striking features, which is a thrust bearing of the same type that is used on the large ocean steamships. This bearing is so constructed that the shaft runs in oil. It is provided with a device by which the position of the armature in relation to the poles can be regulated to the smallest fraction of an inch. The speed of this generator is 300 revolutions in a minute. Its framework is one immense casting 16 feet long.

The railway motor, which the Short Company believes will be the motor of the future, is one that is so constructed as to be practically flexibly suspended in the truck, which relieves it of all strain and jars incident to the ordinary single and double reduction motors. Another very important point is gained by this flexible suspension, and that is, the doing away with the tremendous hammer blows upon the track. The wear and tear on the track by the ordinary motors in use is so great that it would seem that the Short Company are moving along in the right line. The abandonment of all gears is a special feature of the motor, and a very important one from a standpoint of repairs. The development of this motor is rapidly traced in the various stages, from the first one that was built in 1890 to the latest type. This latest type is a six-pole 20 H. P. motor. It is incased, protected from mud and dirt. The working parts are readily reached. This motor is suspended by spiral springs on the car truck. The armature is attached direct to the axle. It has but two brushes and runs without noise.

The rest of the Short exhibit comprises rheostats, motor and generator parts and all other electric street railway supplies.

There are a number of single reduction and double reduction motors exhibited.

DISAPPEARING GUN CARRIAGE.

The question of coast defense has been agitated in this country for many years, without material results so far as fortifications are concerned. The government is partly supplied with heavy guns, with a prospect of more to come, but the mounting and placing of these guns seems, as yet, to be an unsettled matter.

The government has been experimenting at Sandy Hook with a 10 inch breech loading steel rifle which throws a projectile weighing 575 pounds with a velocity of about one mile in 2·6 seconds, the gun being mounted upon Captain Gordon's disappearing gun carriage. The pressure on the breech of this gun is about 3,000,000 pounds, and the problem is to resist the recoil without producing undue strains or shock, and to store and use the power for raising the gun. In the Gordon carriage the gun is mounted on four heavy double cranks journaled on the top of the frame, the arms of each crank being arranged opposite each other. The longer arms support the gun, while the short arms extend downward outside of the frame, and are pivoted to a counterweight frame which surrounds the main frame of the carriage. The counterweight balances the gun and top carriage, so that the only resistance to be overcome in the maneuvering of the gun is the friction on the journals. When the gun is fired, the upper arms swing rearwardly and the lower arms swing upwardly, carrying up the counterbalance. The carriage is brought to rest by pistons working in two hydraulic cylinders provided with an air chamber. By means of this construction, the air pressure, which in the beginning of the movement of the gun is 80 pounds in the air pump, increases at the end of the movement to about 275 pounds per square inch. This energy is stored and utilized in raising the gun preparatory to firing.

In Fig. 1 the gun is shown elevated in position to fire over a parapet; in Fig. 2 it is shown depressed in position for loading.

STATUE OF DUHAMEL DU MONCEAU.

Recently, this carriage has been tried in rapidity tests. Ten rounds were fired in 36 seconds less than an hour, with full service charges of 250 pounds. The weight of the projectile was 575 pounds. The carriage was worked by hand throughout, no power appliances of any kind being used. The value of guns of this character can scarcely be overestimated in the defense of low-lying coast. The guns are exposed only when ready to fire. While being loaded, and at all other times except while actually firing, they are protected by the parapet, and are thus proof against the enemy's fire, and hidden so as to elude discovery.

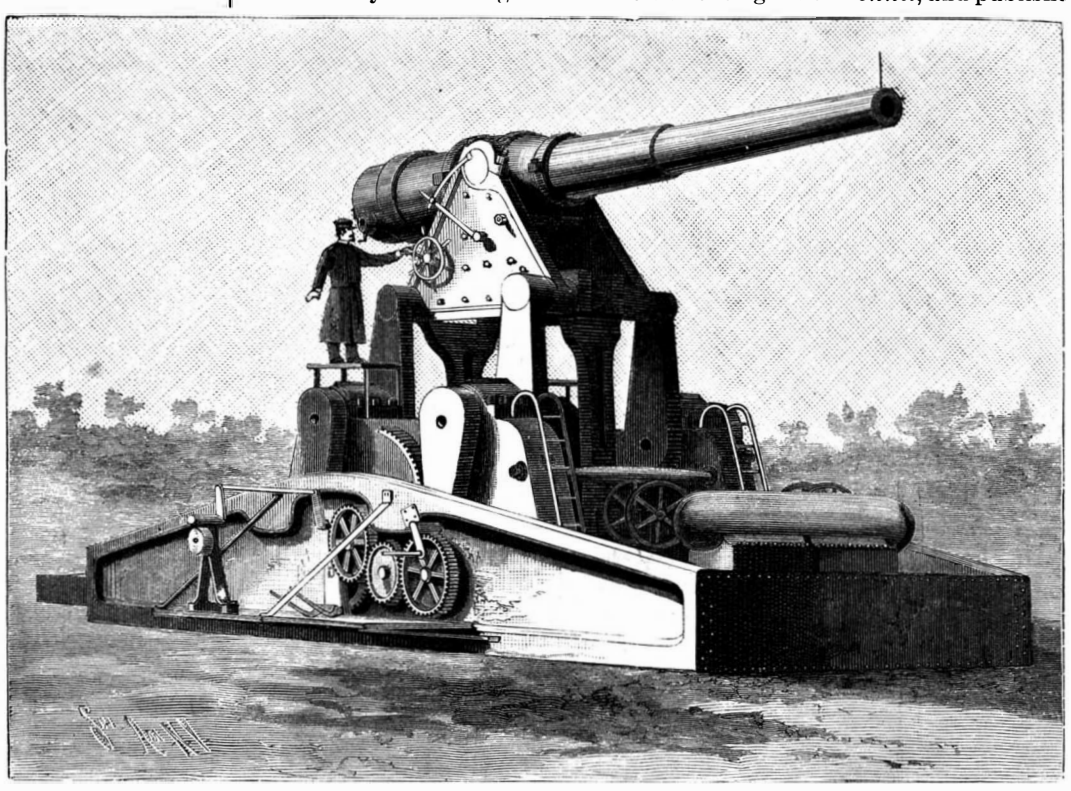

Fig. 1.—CAPTAIN GORDON'S DISAPPEARING GUN CARRIAGE.

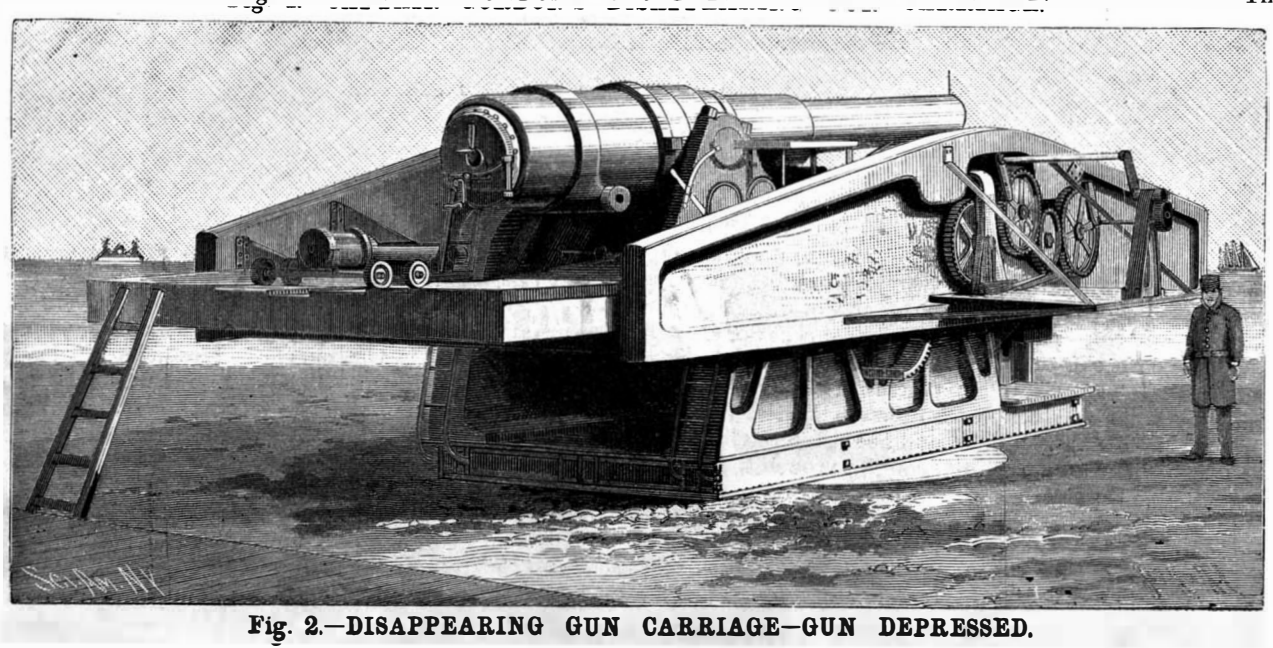

Fig. 2.—DISAPPEARING GUN CARRIAGE—GUN DEPRESSED.

DUHAMEL DU MONCEAU.

On Sunday, the first of October, the city of Pithiviers solemnly inaugurated the statue of Duhamel du Monceau. On this occasion, an agricultural exhibition, with a special competition of dairy apparatus, was organized by the Society of Agriculture, and proved very interesting.

Henri Louis Duhamel du Monceau, who was born at Paris in 1700 and died in 1782, was one of the principal agriculturists of the eighteenth century. Inspector of the marine, he devoted his studies principally to forests. In his *Physique des Arbres*, he was the first to describe with accuracy the laws of the growth of plants, of the formation of wood and bark, of the double circulation of sap, etc. He discovered the *Oidium*, one of the most destructive parasites of the grapevine, and for a long time studied the disease of the saffron. It was in the train of these labors that he entered the Academy of Sciences. He was also a member of the National Society of Agriculture. This learned author of numerous agricultural treatises passed the greater part of the year on his family estate near Pithiviers experimenting upon new agricultural theories, studying fertilizers practically, and occupying himself with perseverance with the enriching of the flora of France through the importation and acclimation of exotic plants.

He was an indefatigable worker, and imposed upon himself the task of laboring twelve hours a day—a rule that he observed during the whole course of his existence. His fortune, which was sufficient to assure him independence, permitted him to devote himself freely to his studies, and to make experiments, which were often very costly, in physics, chemistry, botany, the culture of trees, and meteorology.

He was a philanthropist, and, in his passage to the marine, not content with occupying himself with the improvement of the *materiel* and of the service, and with the construction of posts, lighthouses, etc., he greatly interested himself in the condition of the *personnel*, and published his "Instructions upon the Manner of Preserving the Health of the Crews upon Vessels under Way," a work in which he gives the most practical advice as to the hygiene on board and the preservation of food, and points out one of the simplest of methods of aerating holds by means of a draught of air through the galley stove.

The following is an anecdote concerning him: One day a young naval officer asked him a few questions, to which the scientist answered: "I do not know." "What is the use, then, of being an academician?" replied the young man. Duhamel preserved silence, but, shortly afterward, the officer having become involved in an argumentation that proved his ignorance of the subject, Duhamel retorted: "You see now, sir, of what use it is to belong to the Academy; it is to speak only of what one knows."

The beautiful statue that we reproduce herewith is due to the chisel of the sculptor Blanchard. The pedestal is by Mr. Ratouin, an architect attached to the School of Fine Arts. The savant is represented standing in the attitude of a professor giving a demonstration, and the monument does the greatest honor to the artists who conceived and executed it.—*L'Illustration.*

THE walls of Babylon are said by Herodotus to have been 350 ft. high and 100 ft. thick at the base.

© 1893 SCIENTIFIC AMERICAN, INC.

SWORDFISH EXPLOITS.

Several years ago we published an account of a couple of men out in a boat, fishing in the Lower New York Bay, who observed a commotion among a shoal of small fish, and, rowing to the spot, found what they at first supposed, by its single fin above the water, to be a shark. They attacked the monster with a view of capture, and were astonished by the sudden piercing through of their boat bottom by the sword, 4½ feet long, of a large swordfish. They succeeded in noosing his tail, securing and killing the fish, after which he was towed ashore, and subsequently brought up to the city to a restaurant in Park Row, a few doors from the SCIENTIFIC AMERICAN office. The fish weighed 390 pounds and measured 19 feet 8 inches in extreme length. It was certainly one of the finest specimens we ever saw.

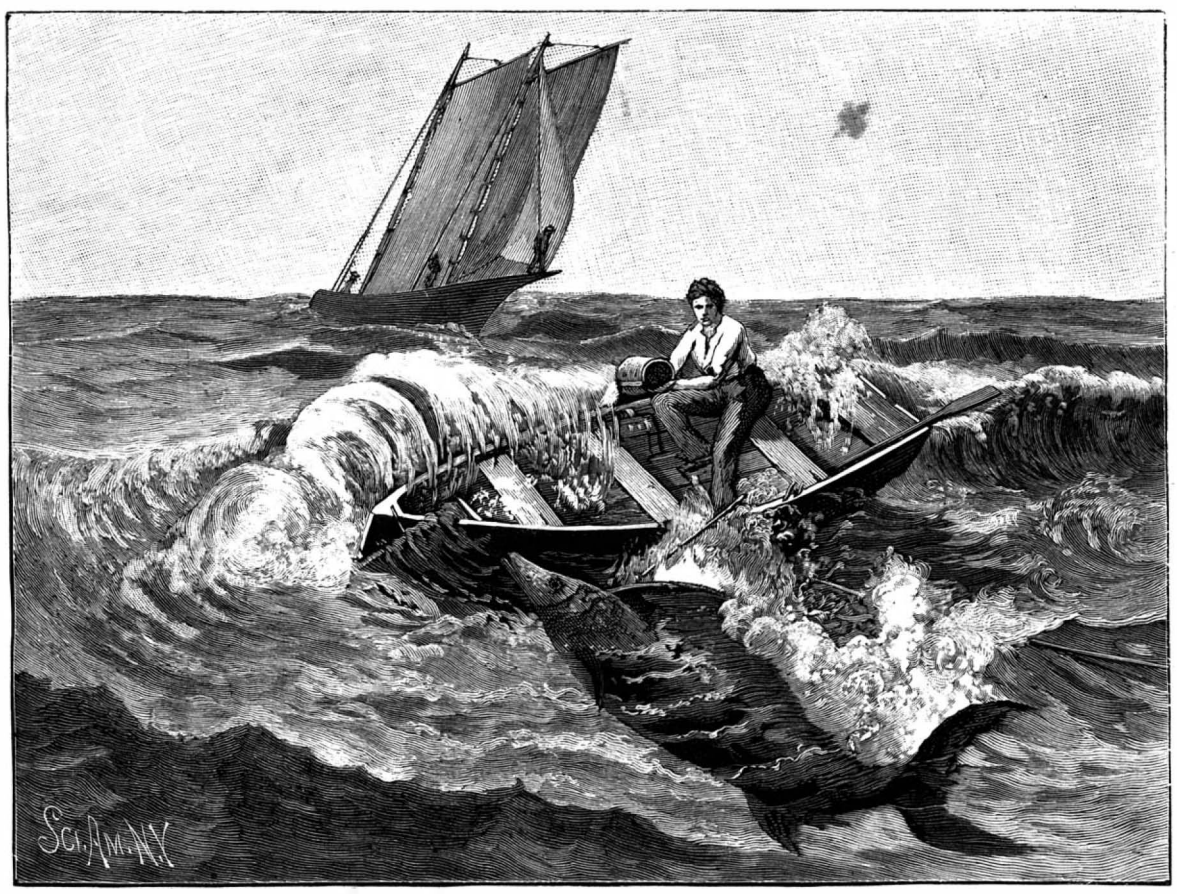

A SWORDFISH PIERCES A BOAT.

The Liverpool *Mercury* gave a report from Captain Harwood, of the brigantine Fortunate, from Rio Grande, to the effect that the vessel, while at sea, was struck and shaken by a swordfish. After discharging the cargo at Liverpool the hull was examined and the sword of the fish found, broken off even with the outside planking. The fish had driven his sword completely through the four inch planking, leaving eight inches of the blade projecting within the vessel.

The swordfish is allied to the mackerel, which it resembles in form, and is a swift swimmer. The sword is a most formidable blade, consisting of a strong straight bone, sharp and flat, projecting horizontally from the nose, of which it is a prolongation.

The swordfish is found in considerable numbers off the island of Martha's Vineyard, coast of Massachusetts, at this season of the year. Its flesh is considered excellent food by many persons, and the annual catch is quite large. The ordinary length of the body of the fish at full growth is 14 feet, and its sword 6 feet, or 20 feet in all.

Swordfish have been unusually plentiful off this coast this summer. The fishermen hunt them with harpoons, spearing them from the decks of small sail vessels. In July last the fishing smack Mattie and Lena arrived at Stonington, Conn., after a four days' trip about Block Island, with sixteen large swordfish, averaging 300 pounds each, and an exciting story of a struggle for life between Henry Cheesebro, one of the crew, and a wounded and maddened swordfish.

Cheesebro had harpooned a big fish off Montauk Point, and, after waiting the usual length of time, got into a small boat to bring the apparently exhausted fish to the vessel. As soon as Cheesebro approached him and commenced hauling in the line the fish awoke from his torpor and started to battle for his life. He began operations by diving so as to spear Cheesebro's boat on coming to the surface. Missing his aim, the fish dived again for a second attack.

It was now too late for Cheesebro to retreat, and defenseless, in the frail cedar yawl, he awaited the onslaught. He was kept in suspense but a moment. When the fish shot out of the water once more, he drove his sword completely through the boat from side to side. The sword entered the boat about three feet from the bow, on the port side, and came out through the thin plank on the starboard side. Cheesebro had retreated to the stern of the boat in time to avoid the violence of the fierce fish, and thus escaped injury.

His plight was seen from the schooner, and the vessel headed for the scene of the conflict. By constant baling Cheesebro kept his frail and disabled craft afloat until succor arrived. A blow on the head finally killed the fish, and Cheesebro's peril as a sword fisherman was over for this time. The fish weighed 338 pounds.

A BEESWAX BLEACHERY.

Beeswax is supposed to come from the stomach of the bee in the form of scales and carried to the mouth with the legs, where a frothy liquor is added to it, causing it to become plastic. In this state it is formed into the cells or comb, in which the bees deposit their honey. The combs are formed in hives built for that purpose, some of which contain colonies of bees numbering from 10,000 to 40,000. Where the climate is warm most of the year round, each hive will average between 350 and 400 pounds of honey. The greatest honey and wax producing States are New York, California, Ohio, Indiana, Illinois, Wisconsin, Michigan, Kentucky, North Carolina, and Dakota. These States produce about 800,000 pounds of beeswax yearly. About twenty pounds of honey are required to produce one pound of wax. Large quantities of wax are imported to this country in cakes of twenty-five and fifty pounds each from Cuba and Africa. It comes in two colors, light yellow and dark brown.

Bees that gather most of their honey from grape and tobacco flowers produce the dark colored wax, which is hard to bleach. That produced from clover, buckwheat, etc., is light colored and bleaches easily. The bleached wax is used mostly by sperm candle manufacturers, wax flower makers, druggists, and in the manufacture of carbon paper. The large cakes are first broken up into small pieces and put into a large circular tub or vat made of cedar. This tub is about five feet in height and about three feet in diameter. Across the bottom of the tub are two square hollow wooden pipes, one crossing the other at the center, the tops of which are perforated with a number of holes. Placed into the end of one of these pipes is a perpendicular wooden pipe, which is connected at the top to a brass steam pipe.

About 1,500 pounds of the wax is placed in the tub and enough water poured on to it to swim it well. From forty-five to sixty pounds of steam is then turned on, which rushes down to the perforated pipes and is forced up through the holes and distributed through the wax, which, in about three hours, becomes thoroughly melted, the dirt and grit, if any, sinking to the bottom. It is then drawn from the tub and run through a sieve, where it falls down on to a revolving wooden wheel or roller, about 4½ feet in length and 18 inches in diameter. The bottom of this roller rests in a bed of water about 18 inches in depth and about 6 feet in length, the temperature of which is about 70°. As the melted wax leaves the sieve it strikes or falls on the top of the wooden wheel in small pieces or ribbons, sticking fast and becoming instantly chilled.

This roller makes about sixty-four revolutions per minute, the wax dropping off the instant it comes in contact with the water. The material is then taken out of the water bed, by means of wooden forks, and placed in boxes and carried out to the bleaching frames. These frames are made of wood, about 100 feet in length, 14 feet in width, and about 8 inches in depth, and raised 3 feet from the ground. About 1,000 pounds of wax is placed on each frame and left out day and night for the sun to bleach for four weeks. It is sprinkled with water four to five times daily, to keep the hot summer sun from melting it, as the temperature reaches as high as 120°. Once a day a sixty-four pronged wooden rake is drawn back and forth through the material, which turns it over, allowing the sun to act on every particle. The wax when first taken out to bleach is yellow. After four weeks' exposure in the sun it becomes a creamy white. It is then gathered up and taken back to the tubs and melted over again, going over the same operation and out again to the bleaching frames, to remain out two weeks longer, with the same

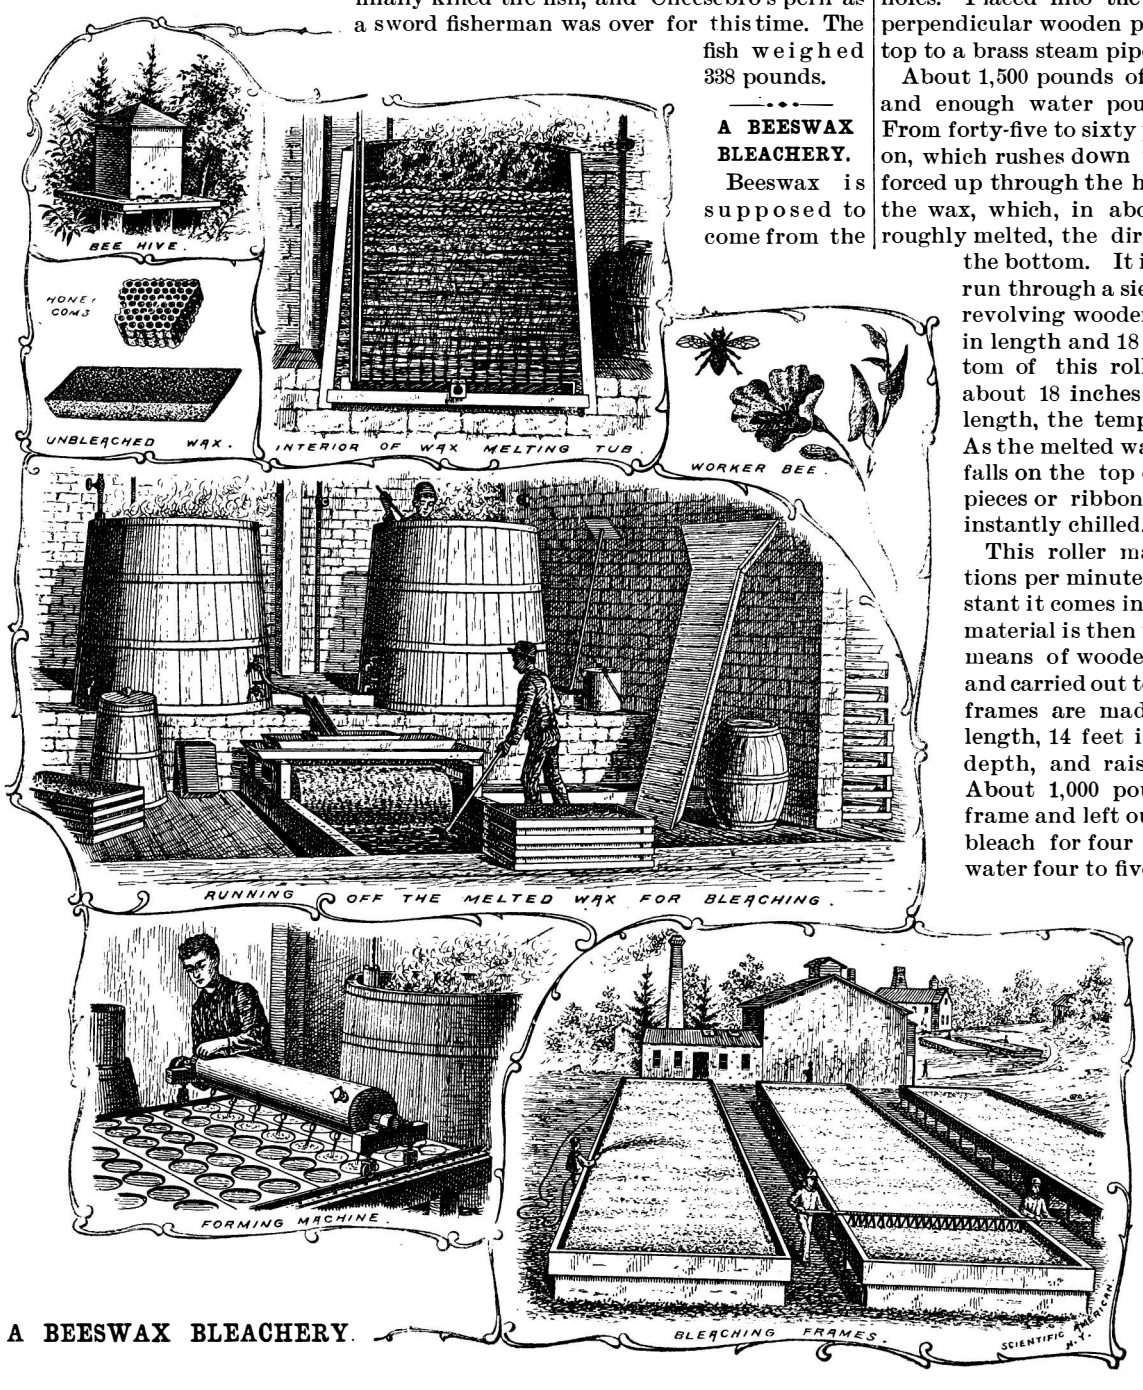

A BEESWAX BLEACHERY.

© 1893 SCIENTIFIC AMERICAN, INC.

sprinkling and raking operation. This second bleaching turns the wax almost to a snow white, and it is ready to be formed into cakes for the market.

About 600 pounds is then melted up at a time in a tub and drawn off to be made into cakes as needed. These cakes are made by running melted wax from a horizontal movable copper cylinder into circular moulds. These moulds are of heavy tin, 4 inches in diameter and about one-quarter inch in depth, and are placed one after another on a long table, the sides of which are fitted up with tracks, over which the movable cylinder can be drawn back and forth. This cyinder is 10 inches in diameter, 5 feet in length, and double. The outer cylinder contains hot water, which surrounds the inner one, containing about fifteen pounds of melted wax. The hot water and wax are poured into the cylinders by means of capped tubes at each end. Projecting from the outside of cylinder and connecting with the inner cylinder are a number of small hollow tubes, through which, when the attendant turns the cylinder over, the wax runs out into the moulds. As soon as the moulds are filled the cylinder is drawn back again and pushed forward to the next set of moulds, the operation being repeated until the moulds are all filled. To keep the wax from cooling, the hot water is poured when cool, and fresh added after every ninety pounds of wax has been drawn off. The moulded wax becomes cool in about one hour, and it is packed into boxes and ready for market. The sketches were taken from the plant of Theodor Leonhard, Paterson, N. J.

Mysterious Fires.

During a recent visit to a country hotel which was lighted by incandescent lamps, Professor John Trowbridge relates that a thunderstorm occurred, and he noticed that the lamps blinked at every discharge of lightning, although the interval which elapsed between the blinking and the peals of thunder showed that the storm was somewhat remote. The effect was doubtless due to induction, produced by the surging of the lightning discharges. On the occasion of a heavy discharge, the lamps were extinguished, although no fuse was burned. This provided an opportunity for an attendant to discover that a jet of gas from a pinhole leakage in the gas fixtures had become ignited (doubtless by a minute electric spark) and the flame was impinging upon some adjacent woodwork. The discovery averted what would have been, perhaps, a serious and mysterious conflagration. The moral of the story is, of course, to be found in the reflection that had the electric light wires not been carried along the gas fixtures, as they were in this case, the ignition would probably not have occurred. This practice is fraught with danger, for if there is a leakage of gas (and what gas fixtures do not leak?) at the joints of the pipes or through a sandhole or other flaw in the casting, then tiny electric sparks arising through resonance effects or from the passage to earth of an electric charge brought into the building by the wires may, if they happen to form in contiguity to the leak, readily ignite the escaping gas without being discovered in time to prevent disaster. If people will cling to their gas when they lay down an electric lighting system, then it behooves the electrical engineer who superintends the work to see that the wires and the pipes are never contiguous, for no lighting guard or protector yet invented can insure that minute sparks, due in some cases to resonance effects, may not arise.—*The Electric Review.*

Water Tank Painting.

"What is the best method of preparing a new steel tank for painting?" and "How should the scale and rust be removed from a common iron tank?" Mr. A. I. Horton, of the Michigan Central Railroad, said, at the recent meeting of the Car and Locomotive Painters' Association, that in preparing iron for tanks it should be rolled and rerolled in the boiler shop before being made up. After the tank is completed it should first be rubbed with sandstone and kerosene, and afterward washed with soft soap and water. Steam should then be turned inside and the tank heated until no moisture appears in the pores or under the scales, and until the lead or paint smokes. As soon as sufficiently cooled it should be puttied and painted. This process gives excellent satisfaction. Mr. Horton also said he had never been troubled with scale on steel tanks as on iron. Mr. F. W. Wright said that the rust could be removed from both steel and iron tanks by rubbing with broken fragments of emery wheel, then with sandstone, and afterward washing with turpentine, when the tank would be ready for puttying and priming.

A RAILROAD RAIL FOR STREET RAILWAYS.

The illustration represents an improved form of rail for street railways, composed of track or running rails proper and supplementary rails bolted to the track rails, and having a laterally projecting top portion serving as a wheel guard and lateral brace for the track rails. The improvement has been patented by Mr. Michael J. Keenan, of Galveston, Tex. Fig. 1 is a cross-sectional view of the preferred form of construction, in which a flange rail is bolted to the inside of the track rail, the lower edge of such flange rail being

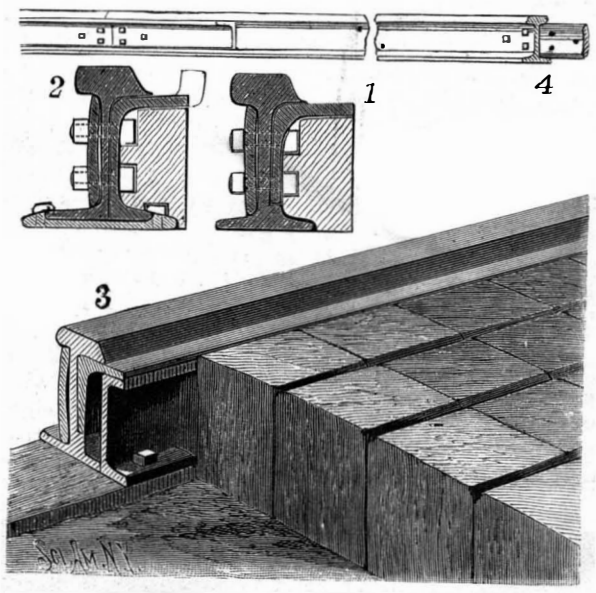

KEENAN'S RAILROAD RAIL.

seated on a shoulder formed on the inner side of the web of the main rail, while its flange portion rests on the usual block forming part of the pavement. In Fig. 2 is shown a modified form of the improvement, the lower portion of the flange rail being in this case formed with a base constituting a continuation of the flange of the main track rail, while at curves in the road the flange may have a guard extension, as shown in dotted lines. Fig. 3 shows another form of construction, in which the outer edge of the flange rail is supported on an angle iron running parallel with the track rail, and connected with the adjacent blocks of the pavement. Fig. 4 is a reduced side view of the improvement. The main track rail breaks joints with the flange rails, so that the flange of the car wheel travels on the flange rails when the tread of the wheel passes over the joint between two main track rails.

German Otto of Roses.

The rose plantations established two years ago in the suburbs of Leipzig have been so successful that they have been largely extended. The trees have withstood the severe weather of the recent winters and developed most satisfactorily. It is stated that great heat is objectionable in the culture, a cool temperature and a somewhat moist condition of the atmosphere being the chief conditions of a good yield. A factory has been built in the midst of the rose fields which will consume 50,000 kilos. of leaves daily, and is expected to produce as a minimum about 40 kilos. of essential oil, the estimated value of which, together with that of the rose water and pomade produced, will be from £2,000 to £2,500. Only the requisite quantity of flowers for immediate use will be gathered at any one time, and the roses will be but a few minutes in passing from the trees into the macerating receptacles. It is claimed that the oil produced in Saxony last year was better than the Turkish product, in delicacy, strength, and the lasting character of its perfume.—*Kew Bulletin.*

DELCROIX'S TOPOGRAPHIC RULE.

The campaign topographic rule that we propose to describe appears to us to be destined to render great services. This instrument, which was devised by Captain Delcroix, solves problems relative to a knowledge of the ground, in form and in position, to the study of nature itself, and to the construction and reading of maps. With it, it is possible to lay out a rapid itinerary or an expedite plan, or make a picturesque sketch by the aid of an elementary perspective picture. Six ordinary scales give the reduction of the lengths. A gradient scale permits of rapidly expressing the ordinary gradients. Employed advantageously for the estimation of distances of firing and of lengths of such a nature as the vertical and horizontal stadimeter, the rule permits through a simple observation of measuring a vertical or horizontal angle, or both simultaneously. The topographic rule thus commends itself to travelers, engineers, all those who indulge in open air sports, lovers of sketching and making interesting observations, explorers and members of societies of gun practice, gymnastics, military instruction, bicycling and nautical sports. It will be seen that its uses are numerous.

The apparatus is formed of two juxtaposed instruments, the topographic rule and the protractor compass (Fig. 1). It consists of a flat rule with beveled edges upon which are engraved two triple scales, giving scales multiples of one another. Upon the rear edge, which also is beveled, is engraved the scale of gradients for the equidistance of a quarter of a millimeter of the staff office map and of topographical maps in general, and that too for ordinary gradients of from a half to ten hundredths. Into the front part of the rule is set a spherical level. Finally, upon the long axis are arranged a sighting screen and a back sight.

A protractor compass with rectifiable limb, placed between two transparent glasses, is set, axis upon axis, into the rule. It is graduated by preference into grades or centesimal degrees, in order to facilitate calculations. Upon the upper glass are traced two arrows of alignment at right angles. Four small datum columns keep the axes at right angles and permit of the variable orientation of the limb. The compass needle may be rendered immovable in any position whatever in order to mark the angles. The compass is easily removed from its receptacle, so as to be employed alone. Upon the long axis of the rule, and in front, is arranged an ocular pinule provided with a hinge so that it can be turned down. The variable color of the eyes and the luminous point of the eye may lead to errors of observation. So in the center of the ocular there has been substituted for the human eyeball a copper one, slightly smaller and containing a visual aperture. The visual ray is thus well centered and the sighting assured. At a distance of 100 millimeters from the pinule and parallel with its plane is suspended in a frame a perpendicular translucent mirror of platinized glass, divided into millimeter squares, and upon which are marked two axes at right angles, and so arranged that the horizontal axis of the mirror and that of the pinule form a plane exactly parallel with the lower plane of the rule. The divisions are read to the right and left of the mirror. The vertical frame, being provided with a hinge and rack, can be turned down and made to assume various inclinations. Fig. 2 shows the method of using the apparatus for an ordinary observation, and Fig. 3 for observation by reflection. A light screen of blackened brass serves to shut off the vertical luminous rays, and to protect the glass during carriage.

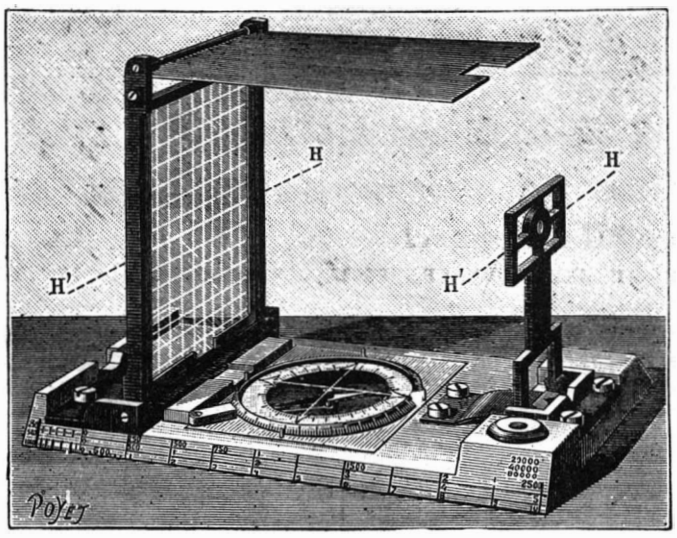

Fig. 1.—DELCROIX'S TOPOGRAPHIC RULE.

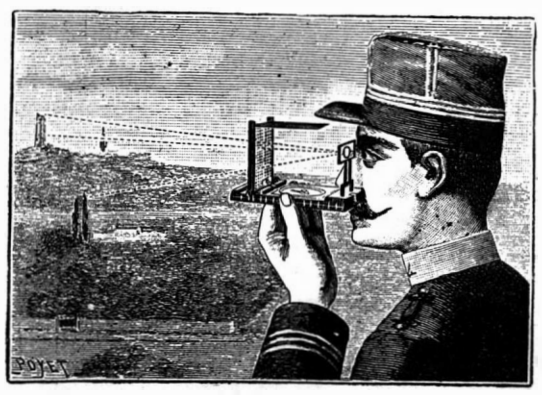

Fig. 2.—NORMAL OBSERVATION.

Fig. 3.—OBSERVATION BY REFLECTION.

With this apparatus it is possible to perform the following operations: Measure horizontal angles and lay off distances; measure vertical angles and differences of level; vertical and horizontal stadimetry; picturesque sketching; and reduction of angles to the horizon.—*La Nature.*

© 1893 SCIENTIFIC AMERICAN, INC.

EXHIBITS OF THOROUGHBRED STOCK AT THE WORLD'S COLUMBIAN EXPOSITION.

The live stock exhibit at the World's Columbian Exposition was one of the most important and instructive features to attract farmers and others who cultivate the soil and are stock raisers interested in animals. It was noticeable that the attendance jumped nearly 25 per cent as soon as the live stock exhibit was opened, and many people expressed themselves as having waited for this event.

The Exposition management did everything in its power to encourage this exhibit and offered premiums aggregating $150,000, and this amount was increased to the extent of $100,000 more by live stock and other associations interested in the breeding of fine animals. Breeders all over the country took greater interest in this exhibit than in anything of the kind that has ever been held, and several men of large means scoured Europe for the finest animals that could be had. Animals thus purchased were brought to this country primarily to be exhibited at the Exposition, but also with the intent of keeping them here; and as a result of this desire among breeders to excel in their exhibits the country benefits by a great many highbred animals. The very best of every recognized breed was to be found at this exhibition, and in every respect it was the largest and most successful display of live stock the world has seen. It was attended by leading breeders from this country, and the live stock associations of Germany, France, Great Britain and other countries appointed responsible members as delegates to attend. The result of the exhibition will be the dawning of a new era in the breeding of fine cattle in this country.

The Exposition built 40 stables in the south part of the grounds in which to house the stock. These stables were 200 feet long and 42 feet wide and were provided with the latest improvements in the line of ventilation, drainage, stable equipment, etc. The stables were sufficient to accommodate three thousand animals in stalls varying from four feet six inches to ten feet in width, and with the driveways between the buildings covered an area of twenty-seven acres. Animals were never cared for more tenderly. The horses were groomed and exercised and watched with the greatest of care, and the cattle were combed and brushed, their tails crimped and their horns carefully polished each day.

The exhibit opened August 21 and closed October 28, and prizes were offered in each ring or age. Ninety prizes were awarded each of the fourteen breeds of cattle. One of our illustrations last week showed a prize winning cow of the Holstein-Friesians. She, born and bred in this country, is called Walled Lake Queen, and was entered by C. V. Seeley, New Farmington, Mich. She carried away $100 worth of prizes, $50 being the Columbian Exposition prize and the other $50 the sweepstakes prize.

The prize Dutch belted bull shown in our illustration last week was exhibited by H. B. Richards, Easton, Penn., who exhibited a herd of 35 or 40 animals of this breed. In fact, all the animals of this breed belonged to this exhibitor. This prize winner was Byron, who carried away $85 in prizes, which included the first prize in its class and the live stock association prize. He was entered in the class of bulls three years old or over; sweepstakes bull of any age, as well as with a herd. He is an American-raised animal.

Prince Attractive is the name of the prize winning Clydesdale stallion illustrated in our present number. He is owned and was exhibited by Robert Holloway, Alexis, Ill. He was entered in the section of stallions two years old and under three, and he took $350 in prizes—$150 being the Columbian Exposition award and $200 a special prize offered by the American Clydesdale Association, which made a special effort to encourage a fine exhibit of this breed of animals. He also took an extra prize offered by the Great Britain Clydesdale Association.

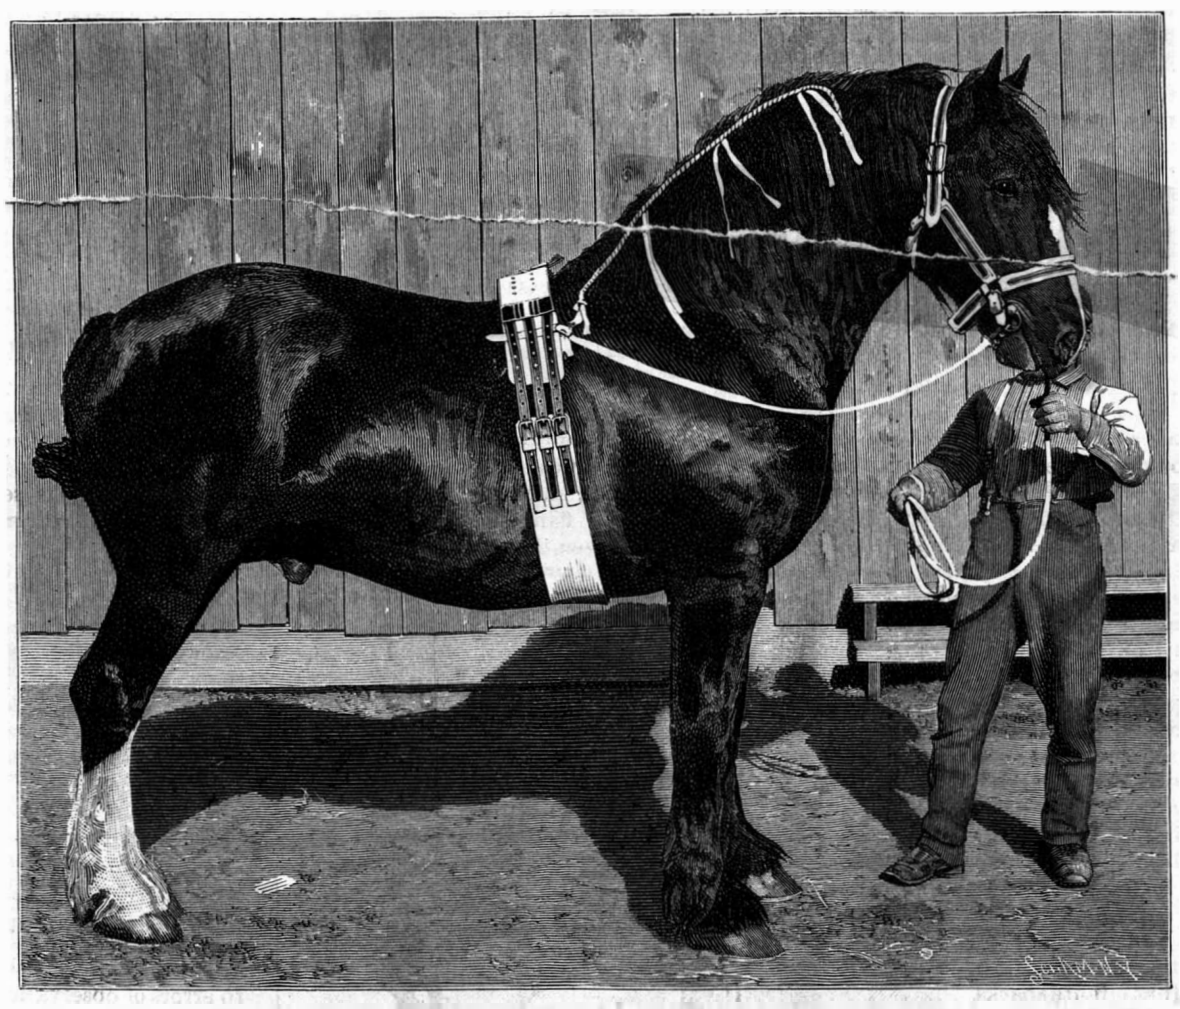

THE WORLD'S COLUMBIAN EXPOSITION—THE PRIZE CLYDESDALE STALLION, PRINCE ATTRACTIVE.

SOME of the Comstock mines are so deep that no means have yet been devised to overcome the excessive heat.

Manufacture of Soap Powders.

Schreib states (*Chem. Zeit.* and *J. S. C. I.*) that the washing powders or soap powders, which have latterly become important articles of commerce, always contain besides powdered dried soap a large percentage of sodium carbonate, generally in the form of dried soda crystals. These powders may be prepared in either of the following ways:

1. Anhydrous sodium carbonate or soda ash is added to a "clear boiled" soap paste, and after thoroughly mixing, the somewhat stiff material is drawn off into cooling frames. The cold and hard soap thus obtained is then finely ground.

2. Soda crystals and soap are melted together and then treated in the above manner. This method of manufacture, however, is only advantageous where soap scraps are to be had.

A suitable apparatus consists of a wrought iron vessel with a strong agitator contained in an interior cast-iron vessel, which can be cooled by water circulated in the outer vessel. The liquid soap is cooled while the soda ash is slowly added and completely dissolved. During the grinding process care has to be taken not to overheat and thus soften the product.

The composition of soap powders varies considerably. Only a small proportion of resin soap can be used, as such soap is sticky and cannot be powdered. Olein soap may be used with advantage, and the olein may be saponified with sodium carbonate instead of the more expensive caustic lyes.

As a small quantity of free chlorine is not objectionable in soap powder, dark colored materials, such as bone fat, fish oils, etc., may be used for making soap, with an addition of a small quantity of bleaching powder. To some soap powders 2 to 5 per cent of sodium silicate is added. A good washing powder should contain: 30–35 per cent of fatty acid; 30–35 per cent of sodium carbonate; and 30–40 per cent of water. The inferior powders containing only 5–10 per cent of fatty acid should not be used for the laundry; they are only serviceable for scrubbing purposes.

There is a soap powder in the market containing a soap prepared by treating linseed with caustic soda directly. This soap contains certain impurities derived from the seed, which lather freely, and thus when the powder is used, give the impression of more genuine soap being contained in the powder than is actually the case.

Improvement in Half-tone Blocks.

Dr. E. Albert has patented a new method of preparing half-tone blocks, which is stated to be a great improvement. The number of lines on a grain screen varies from 5 to 8 per mm.; more than 8 gives blocks difficult to print, less than 5 gives flat results. The proportion of the intervals between the lines to the breadth of the black lines is 1·1, and this is not the best for the high lights, and for the shadows 3·1 is better. Albert has arranged a micrometer screw on the objective, which is sensitive to 1-30 mm. The action of this is to broaden or narrow the lines, and thus gain the effect required.—*Talbot's Neuheit.*

Diamonds from Coal Gas.

M. Gustave Rousseau recently communicated to the *Comptes Rendus* a remarkable statement referring to his experiments upon the cyclical condensation of carbon. It appears that, in the course of some investigations into the nature of certain manganites, cobaltites, and ferrites, M. Rousseau obtained some metamorphoses which led him to the discovery of a new phenomenon in chemical physics—that is to say, the so-called cyclical transformations to which can be subjected a particular radical under different temperatures. Thus certain compounds of manganese and soda can be formed at a given temperature, changed into something different by raising the temperature, and finally reconverted into the original compound at a still higher heat. From these analogies, says the *Journal of Gas Lighting*, M. Rousseau thought that, if hydrocarbons were heated through the range of temperature between bright red and 3,000° C., there might be produced in turn the various isomeric states of carbon, each of which presents its own degree of stability according to its place in the thermometric scale. It is known that the hydrocarbons form amorphous carbon by decomposition at red heat; while all varieties of carbon are transformed into graphite in the voltaic arc. M. Rousseau claims to have established the novel fact that carbon presents the cycle graphite-diamond-graphite in an interval of temperature comprised between 2,000° and 3,000° C. He worked with acetylene to solve this problem, because this carbon compound has a certain stability at high temperatures, and is endowed with a marvelous plasticity, besides polymerizing easily into a series of carburets more and more condensed. Acetylene was heated in an electric arc furnace, producing both black diamonds and graphite. The experiment was of a difficult character, and much acetylene escaped treatment. M. Rousseau says that the hydrocarbons of coal gas can be made to furnish acetylene, under the action of heat; and in one experiment of 40 minutes' duration, he was able to obtain 20 milligrammes of black diamond in this way: He caused a current of illuminating gas, saturated with the vapor of benzene, to pass into a hollow block of quicklime, where the voltaic arc was maintained. Unfortunately, owing to the leakiness of the furnace, the gas burnt; and after two hours' heating, he could only find a small quantity of graphite mixed with some grains of carbonado. M. Rousseau proposes to continue these experiments, with a furnace hermetically sealed, and constructed of refractory material not containing carbonates. He also intends to substitute for coal gas the highly condensed carburets derived from coal tar or petroleum residuum. Whatever may be the further outcome of these experiments, it is of interest to record that diamonds have actually been made directly from coal gas by simple heating under ordinary atmospheric pressure.

Long Distance Telephony.

The American Telephone and Telegraph Company recently gave an exhibition of their long-distance telephone lines to a small party of guests who assembled at the Telephone building in Cortlandt Street.

Among those assembled to witness the exhibition were Dr. Von Helmholtz, Prof. Alexander Graham Bell, Dr. Hermann Knapp, Miss Knapp, Prof. Seth Low, Prof. Ogden N. Rood, Prof. Geo. E. Deschweinitz, and Mr. Edward J. Hall, Mr. Melville Egleston, and Mr. F. A. Pickernell, of the telephone company, besides some representatives of the press.

A number of receivers were arranged so as to give each of the party a connection to the line. Connection was made with Boston, Chicago, and Washington in turn, and conversations were held with the officers at those points. A cornet was also played which was heard through 500 miles of wire as distinctly as though it were in an adjoining room. The conversation with the headquarters of the telephone company at the World's Fair was held with perfect ease, speaking in an ordinary tone of voice.

© 1893 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Railway Appliances.

CAR COUPLING.—John F. Tiner, Sutherland Springs, Texas. This is an improvement in automatic couplings of the link and gravity pin type, and provides a device which may be set to couple two approaching cars provided with the improvement, and which may be manipulated for uncoupling by the usual lever or chain attachment. In a central recess of the drawhead is a slide block, and in a recess of the block is a vibratable brake bar, while an incased spring-pressed coupling pin slides vertically in the drawhead in front of the slide block, and the pin case has a flexible connection with the brake bar.

Mechanical.

TAP WRENCH.—Frederick C. Williams, 57 Park Hill Avenue, Yonkers, N. Y. This is a strong and simple tool, in which the jaws may be quickly and conveniently operated to receive the dies, and when the jaws are fixed they will be firmly held in place, being clamped by a short turn of a lever. The jaws are held to slide on the beveled surfaces of the walls of the body within an opening therefor, and by means of a lock lever may be locked at any point in the opening. All wear is taken up at each adjustment, and there is an equal amount of strength in both handles.

RATCHET DRILL BRACE.—William P. Nolan, San Francisco, Cal. This an improvement on a formerly patented invention of the same inventor, providing an improved brace in which the speed of the tool shaft can be conveniently changed from a high rate of speed to a single motion corresponding to the movement of the crank arm, or *vice versa*. The frame has a casing with an internal gear wheel, a crank arm turning within the frame, and a ratchet wheel adapted to be locked to the crank arm. A series of gear wheels on the ratchet wheel are in mesh with the internal gear wheel, and a sliding tool shaft has a gear wheel with ratchet teeth adapted to engage the corresponding teeth on the ratchet wheel.

BED FOR MORTISING MACHINES.—Alfred J. Saunders, Port Arthur, Canada. Upon a carriage fitted to slide upon the bed frame is secured a pattern formed with notches arranged according to the mortise to be formed in the stile, while a locking device held on the bed frame is adapted to lock the carriage thereto. The construction is simple and durable, and the improvement is well adapted for convenient adjustment to various sized stiles.

SAWING MACHINE.—Leslie P. Smith, Otego, N. Y. This improvement consists of a table supported at its front edge on swinging legs and at its rear end on a swinging arm, the machine being designed to conveniently support a log and move it to the saw to be cut. The log is fed against the saw by pushing the table rearward, the table swinging on its front legs and on the extension, the cut-off end of the log sagging so that no binding of the saw occurs during the operation.

Mining.

ORE SEPARATOR.—Alonzo C. Campbell, Nashville, Tenn. A reciprocating pan, according to this improvement, is adapted to deliver concentrates from one end and tailings from the other, the apparatus being also designed to serve for washing coal. It is adapted to work successfully on coarse and fine material of different densities, the mechanical movement operating the pan shaking it in such a way as to keep the pulp well stirred up, while water is delivered in nicely regulated quantities to the top and bottom of the material operated upon. The apparatus is also designed to economize space, while it entirely separates the metals from their ores with the utmost rapidity and the least possible expense.

MINERAL LOCATOR.—Robert T. Lacy, Jr., Camden, N. J. This is an instrument to be driven into the earth and bring up samples of rock and minerals from different levels, to determine the value of any location for mining purposes. Combined with a driving rod and pointed bit is a tubular sheath of greater length than the bit, and through the lower end of which the bit projects. There is an adjustable connection between the rod and the sheath, and the lower end of the latter may be converted into a receptacle to gather and hold the material to be brought up from the different levels.

Agricultural.

WHEAT STACKER.—Nicholas Housinger, Sylvia, Kansas. This is a strong and simple machine by which the grain, when placed in suitable receptacles, may be drawn up inclined planes and quickly and conveniently dumped, the receptacle being restored to the vehicle or support from which it was taken. In combination with a vehicle having one pivoted side board are sliding receptacles adapted for a locking engagement, while a track section is pivotally connected with the vehicle supports, an inclined track being adapted to engage with the vehicle track sections, and a tilting platform forming a portion of the track.

Miscellaneous.

AERIAL VESSEL.—Axel F. Bergqvist, Fairfield, Iowa. This vessel comprises a balloon from which is suspended a basket, with propeller wheels at the front ends of both the basket and the balloon, with machinery for driving the wheels and tilting the balloon from the basket. A rudder sail extends from the balloon to a boom projecting from the basket, and the balloon is supplied with gas through pipes connecting with a reservoir in the basket, the driving shaft being operated either by the gas from the reservoir or by other means.

FENCE WIRE STRETCHER.—John H. Gillis, Coesfield, Texas. This is a simple and inexpensive device, quickly placed against a post and secured to a wire, connecting with wires of dissimilar heights, for stretching a wire to any necessary tension. It comprises a beam to one end of which is pivoted a clutch plate having laterally extending serrated arms, a detachable swinging frame on which is a windlass being carried by the beam. A cable carried by the windlass has a wire-engaging hook, and a guide pulley is pivoted on the side of the beam.

TENT.—Benjamin F. Upton, St. Augustine, Fla. This is a tent in which one or two hammocks may be suspended and protected from the weather on either side, or the tent may be practically thrown open to permit currents of air to pass over the hammocks. The tent is especially adapted for purposes of camping out, being foldable in small space when struck, and weighing but little when folded, while being amply strong to support and shelter at least two occupants.

HOOF PAD.—Frank A. Ryan, Sherman, Tex. This is an adjustable rubber pad adapted to be arranged within the shoe of a horse, and having metal braces passing through the pad for engagement between the foot and shoe. A strap from the braces passes from the heel end over and around the foot of the animal. The pad is readily adjustable to a foot of any shape or size, avoiding all contact of metal with any tender part of the foot, and the rubber when worn may be renewed without replacing the metal or mechanical parts. The device may also be used to expand a contracted hoof in a natural and easy manner.

CARTRIDGE SHELL EXTRACTOR.—Rodolfo P. y Cubillos, Bogota, Colombia. This is a device having spring fingers, one of which has two cutting edges at its lower end, while the other has a flattened extremity. The fingers operate conjointly to remove a broken or lodged shell from a rifle, the device being introduced and forced down the grooves, with the fingers compressed, by means of a ramrod, when the shell is cut by one finger as the other passes behind the loosened parts.

CANE LOADING APPARATUS.—George W. Bennett, Bennettsville, La. This is an improvement in devices for loading cane into cars, comprising a basket with a number of connected chains and end cross bars, a hoisting frame or head having supports to carry the cross bars, with means for raising and lowering it and a tripping lever to force the cross bars from their seat on the head or frame. By the apparatus a quantity of cane to fill an ordinary cart may be easily lifted and dumped into the cars so as to lie straight, as it would lie if packed in by hand.

WINDOW SCREEN.—Francis M. Jay, Guthrie, Oklahoma Territory. This screen is secured to a spring-controlled roller journaled in the window frame, a hook being attached to the free end of the screen, while there are hooks in the sash, a connecting S-shaped hook engaging the hook of the screen and the hook on the sash. The arrangement is such that when the upper sash is lowered or the lower sash raised the screen automatically covers the opening which would otherwise be left by the sash.

WINDOW SHUTTER AND CURTAIN.—John O'Donnell, Mountain Lake Park, Md. A curtain made of open chain-like netting, strong enough to resist an ordinary bullet, and also designed to prevent burglars from gaining easy access to a house, is provided by this inventor. The shutter and shade are also so made that it may be easily fastened at any desired height, will run up automatically when released, will serve the purpose of an ordinary mosquito screen as well as a shade, and may be applied to any usual style of window in a building, car or other structure.

FAN MOTOR.—C. P. Elieson, New York City. This is an electrically operated fan comprising a suitable base or support on which turns an electric motor, the armature of which carries the fan, propelling mechanism being also driven by the armature to revolve the motor itself. By the slow revolution of the motor and the more rapid rotation of the fan, a better circulation and more even distribution of the air is effected than can be obtained by the ordinary fan movement.

VEIL FASTENER.—William H. Harrison, Newark, N. J. This is a simple device, readily applied on the ends of a veil, to facilitate tying it in the desired position without danger of its becoming unfastened. It consists of two coupling members, each provided with loop-forming veil end adjusters, one of the members having an eye with its front bar widened near the middle, to be engaged by a hook on the other member, the hook being formed of curved bars united by a connecting bar formed with an inward bend.

MOSQUITO NET FRAME. — Harry H. Rumble, Norfolk, Va. According to this invention a top or canopy frame, extending over the head of the bed, is attached to the head board, and an edge frame, preferably made of strong light wood, as bamboo or cane, is removably attached to the bed on a level with the lower edge of the bed rails. The net is thrown over the top frame and bed, while its edges are secured to the edge frame. The application of the two frames to the bed is very simple, and the frames may be easily taken apart and stored in small space when not in use.

IRONING BOARD.—John E. Tracy and Arthur N. Graham, Chicago, Ill. This is an improvement in that class of ironing boards adapted to be attached to and receive partial support from a table. It is of very simple and inexpensive construction, and the board is adapted to automatically clamp one of its ends fast to the edge of the table when the prop support of the board is swung into position to hold the board up in position for use.

LAUNDRY TONGS. — Thomas Eagan, New Haven, Conn. This is a very cheap, simple, and convenient implement, which may be made to answer the purpose of an ordinary clothes stick, and is adapted to be dipped into a boiler of hot water to pick out articles, grasping a collar button, collar, or other small thing, while also strong enough to lift large articles.

INKSTAND AND ATTACHMENTS.—Willard C. Eldridge, Chicago, Ill. This improvement comprises a unique and advantageous combination of parts embodying in compact arrangement many necessary adjuncts of a desk or writing table. Combined with the supporting stand for ink wells are postage stamp holders, pen remover, penknife sharpener, pencil sharpener, card holder, pen rack, bill file, pen holders, a universal calendar, a pen wiper, and pincushions, etc. The entire device may be made of metal, suitably ornamented.

ENVELOPE.—Malcolm Scougale, Fort Worth, Tex. Two overlapping end flaps, according to this invention, are connected with each other by a band, forming, with the front, an expansible pocket for the accommodation of a large number of letters, documents, or other matter, a top flap and a bottom flap being adapted to fold one above the other, and both over the end flaps, while a band holds the top and bottom flaps closed.

FRAME FOR BLOTTERS.—Adolph Ludwig, Brooklyn, N. Y. This is a frame between which several sheets of blotting material and a cover may be conveniently clamped, the frame carrying a locking device which is passed through the pad. In addition to binding the blotting sheets, the frame may be employed to disclose a shifting calendar, or to receive and disclose a photograph, a memorandum tablet, or other articles for ornamentation or use around a desk.

TEETH GRINDING DENTAL APPARATUS.—Daniel E. Morse, New York City. This invention provides a method of and means for rapidly fitting and joining adjacent block sections of porcelain or other artificial teeth. The method consists in removing the block sections from their mould in the position they occupied thereon, and then grinding the adjacent edges of the sections on parallel grinding faces. A frame is also provided having sliding carriers adapted to hold the adjacent block sections.

FRAME FOR MAIL BAGS, ETC.—George A. La Fever, Selkirk, N. Y. This is a frame applicable to any character of bag in which it is desirable to have the mouth held open or to hold the mouth readily closed. It is composed of rigid sections united by hinged connections in such manner that the sections may be folded out in rectangular form, or folded one upon the other to form practically a long flat bar. Two of the members have projecting flanges, which, when the frame is opened, will be at diagonally opposite corners, enabling the bag to be suspended in a ready and convenient manner.

PRINTER'S CHASE.—Harry S. Foster, Albany, N. Y. In a chase of the usual kind, in which matter is locked by the use of the ordinary furniture, an angular form may be arranged in one corner, or such other position as desired, by the use of this improved chase, which has an outer square frame with an inner circular ring on which is a graduated scale. The ring has a shoulder on its inner side on which rests and turns the shoulder of an inner circular chase, having faceted or flattened inner sides, for convenience of locking up matter therein. The inner chase also has gauge marks to register with the graduated scale, whereby it may be nicely adjusted to position and insure a perfect register.

BABY CARRIAGE BRAKE.—Milton W. Bohn and James H. Machen, Norfolk, Va. This is a simple and inexpensive device which will lock the vehicle from movement except when it is being propelled by the attendant. The brake is held normally in engagement with the wheel, and there is a connection between a hand hold adjacent to the handle and the brake, whereby the attendant may, in propelling the vehicle, also hold and retain the brake out of engagement with the wheel.

BED BOTTOM.—James W. M. Witt, Cedar Bluff, Ala. The corner stays, according to this improvement, have hooks, with which are connected the stay rods and mattress support, while coiled springs depending from the sides of the bed support the mattress frame and retain each slat thereon independently of the other, so that one may yield without interfering with the others.

SPRING BED.—William M. Myers, Hannibal, Mo. According to this improvement the springs are so supported in connection with the headboard that the springs may be shipped and stored in connection therewith, and the same devices for holding the spring to the headboard may serve to give tension to the spring. The construction of the spring is such, also, that it may be adjusted in reasonable limits to suit beds of different widths, and will be comfortable and easy at any width.

CLOTHES PIN.—John W. Cook, Harrisburg, Oregon. A piece of wire is bent about midway of its length to form a spring clasp to hold the clothes, the wire being then twisted to form two oppositely disposed eyes to which a drawing cord may be attached, and the ends being curved and lapped to form an open supporting eye. It may be used with a pulling or drawing cord to stretch articles along a line, without leaving a fixed position, and the pin may be readily attached to and detached from a line without interfering with other pins.

ERASER.—George Freund, Durango, Col. On one end of this eraser are a burnisher and abrader, on opposite sides of the implement, and on the other end is an arrow-like scraper head having a marginal groove in both edges forming an increased number of scraping edges.

MUSIC CHART.—James H. Brady, William A. Whitehead, and Samuel J. Shea, Frankfort, Ky. This chart should be made of heavy cardboard or similar material, about twenty-three inches long and six inches wide, and in use is to be placed edgewise upon the rear portion of the keyboard. It is divided into major and minor sections, and arranged to indicate clearly to an inexperienced person the keys of a piano, organ, or similar instrument to be struck to produce the several major and minor chords of the key to which the chart has been applied.

MAKING UNINFLAMMABLE FABRICS.—Carl Baswitz, Berlin, Germany. The preparation of textile fabrics by means of ammoniacal oxide of copper, according to an improved process, is the object of this invention. The fabrics are dipped in a solution of vegetable parchment in ammoniacal oxide of copper, the ammonia is then evaporated and the fabrics treated with sulphate of ammonia and acetate of alumina to remove the copper and render the fabric uninflammable.

UTERINE DILATOR.—Arthur J. Beavis, Aspen, Col. This is a simple surgical instrument for the rapid and safe dilation of the cervical canal and urethra, with ease to the operator and safety to the patient.

NOTE.—Copies of any of the above patents will be furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention, and date of this paper.

NEW BOOKS AND PUBLICATIONS.

SOUND SENSE IN SUBURBAN ARCHITECTURE: CONTAINING HINTS, SUGGESTIONS, AND BITS OF PRACTICAL INFORMATION FOR THE BUILDING OF INEXPENSIVE COUNTRY HOUSES. By Frank T. Lent, architect, with illustrations by the author. Cranford, N. J.: Frank T. Lent. 1893. Pp. 98. Price $1.

This very pretty work by a New Jersey architect contains very good suggestions for cottage residences, illustrated by drawings in many cases from buildings erected in this vicinity. For those contemplating alterations in country buildings, there is no question that many excellent hints can be found, as well as for those who have in mind the possibly more critical operation of complete building.

THE DYNAMO: ITS THEORY, DESIGN, AND MANUFACTURE. By C. C. Hawkins and F. Wallis. London: Whittaker & Co. The right of translation is reserved. 1893. Pp. xiv, 520. Price $3.

It is fair to assume that in the present days of progress of electrical engineering every new work will embody something new. Whether in the face of the recent publications it is necessary to produce a new work on the dynamo is questionable, yet it is undoubted that the present work will fill a space, as being more popular and less expensive than such works as we have alluded to. It is fully illustrated, contains a reasonable quantity of formulæ without being too mathematical for the everyday practical engineer, and is very fully illustrated in examples of recent practice.

SCIENTIFIC AMERICAN BUILDING EDITION.

OCTOBER, 1893.—(No. 96.)

TABLE OF CONTENTS.

1. Elegant plate in colors showing a residence at Bridgeport, Conn., erected for Mr. F. W. Smith. Floor plans and two perspective elevations. An excellent design. Mr. W. S. Briggs, architect, Bridgeport, Conn.
2. Plate in colors showing Queen Anne cottage of Mr. George W. Childs, at Wayne, Pa., erected at a cost of $6,700 complete. Perspective view and floor plans. An attractive design. Messrs. F. L. & W. L. Price, architects, Philadelphia.
3. A dwelling erected at Holyoke, Mass. Perspective view and floor plans. A model design. Cost $6,900 complete. Mr. B. P. Alderman, architect, Holyoke, Mass.
4. A suburban cottage erected at New Haven, Conn., at a cost of $2,854 complete. Floor plans, perspective view, etc. Messrs. Wilson & Brown, architects, New Haven, Conn. An excellent design.
5. Engraving and floor plans of an elegant residence erected for W. R. Mygatt, Esq., at Denver, Col., at a cost of $28,000. Messrs. Lang & Pugh, architects, Denver, Col.
6. The beautiful residence of Mr. Walter Dunning, at Denver, Col., erected at a cost of $26,000. Floor plans and perspective elevation. Messrs. Lang & Pugh, architects, Denver, Col.
7. A cottage at Hartford, Conn. Floor plans and perspective elevation. A unique and convenient design.
8. A residence at Carthage, Ill., erected at a total cost of $4,500. Perspective view and floor plans. Mr. G. W. Payne, architect, Carthage, Ill.
9. Residence of Mr. E. W. Smith, at Brazil, Ind., erected at a cost of $3,600 complete. Plans and perspective.
10. A residence at Bridgeport, Conn., erected at a cost of $5,000 complete. Four elevations and floor plans. Messrs. Longstaff & Hurd, architects, Bridgeport, Conn.
11. View of the building of the French government at the World's Columbian Exposition.
12. Buildings of Sweden and India at the World's Columbian Exposition.
13. The New York State Workingman's Home at the World's Fair. Perspective view and floor plans.
14. An Italian country house or villa. Plans and perspective.
15. Miscellaneous Contents: Imitation walnut.—Antinonnin.—Protection of adjoining walls.—The Draper recording thermometer, illustrated.—Improved elevators.—An improved woodworking machine, illustrated.—House heating boilers, illustrated.—Slow burning dwellings.—The Pasteur filter, illustrated.—The Willer Mfg. Co.'s exhibit at the World's Fair, illustrated.—Cedar and cypress tank, etc.—A patry-line quarrel.

The Scientific American Architects and Builders Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural Publication in the world. Sold by all newsdealers. MUNN & CO., PUBLISHERS, 361 Broadway, New York.

© 1893 SCIENTIFIC AMERICAN, INC.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appearin the following week's issue

Order pattern letters & figures from the largest variety. H. W. Knight & Son, Seneca Falls, N.Y., drawer 1115.

Stow flexible shaft. Invented and manufactured by Stow Mfg. Co., Binghamton, N. Y. See adv., page 222.

"U. S." metal polish. Indianapolis. Samples free.

The exhibit of Wm. Jessop & Sons has received the highest award at Chicago Exhibition.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Estimates furnished for moving, raising, or shoring buildings. W. K. Clynes, Jersey City, N. J. Estab. 1853.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Centrifugal Pumps for paper and pulp mills. Irrigating and sand pumping plants. Irvin Van Wie, Syracuse, N. Y.

For Sale—Patent household article. Cost to make less than 10 cents, and will sell for $1. J. F. Ervin, Fort Wayne, Ind.

Emerson, Smith & Co., Ltd., Beaver Falls, Pa., will send Sawyer's Hand Book on Circulars and Band Saws free to any address.

Split Pulleys at Low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

The "Olin" Gas and Gasoline Engines, from 1 to 10 horse power, for all power purposes. The Olin Gas Engine Co., 222 Chicago Street, Buffalo, N. Y.

Perforated Metals of *all* kinds and for *all* purposes, general or *special*. Address, stating requirements, The Harrington & King Perforating Co., Chicago.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

If you want to buy anything, write to us and we will purchase for you at lowest N. Y. City prices. No commission. Miller & Burtnett, purchasing agents, 338 Broadway, New York.

Competent persons who desire agencies for a new popular book, of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.

☞Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(5448) E. E. S. says: I send you herewith a piece cut from an ash tree, together with an insect found on the same. The entire tree is covered with a similar incrustation and is apparently dying. Please tell me through Notes and Queries what the insect is and the remedy, if any. A. Reply by Professor C. V. Riley.—The section of ash limb sent is densely incrusted with the scales of the oyster shell bark louse, a well-known pest of the apple tree, which also infests a great variety of other trees and shrubs. The larger insect referred to is an immature plant bug belonging to the family Pentatomidæ, carnivorous in habit, but having no connection whatever with the bark louse except that it might occasionally feed upon it, though normally foraging on larger insects, such as the larvæ of Lepidoptera. A more thorough infestation by this scale, which seems to have covered the limb to a depth of several layers, is not often seen, and it can easily be imagined that the injury resulting from the attacks of myriads of the insects would be very considerable. This scale receives its common designation from its general resemblance to an oyster shell, and covers a soft-bodied, almost organless, insect which, beneath this protective covering, extracts the juices of the plant tissue by means of a long sucking tube. All the other organs, feet, eyes, mouth parts, antennæ, etc., have disappeared, leaving it practically a segmented bag with a sucking tube. This scale, in common with all others of its kind, is not always in this degraded, helpless condition, but in the larval stage is provided with six legs and other appurtenances of insects, and runs rapidly about until it finds a suitable location, where it fixes itself and begins the exudation from the surface of its body of a waxy powder which, by constant accretions, forms the waxy scale of the mature insect. In the meantime, in the first moult, all the members of the body except the proboscis are shed and abandoned, and the insect thereafter merely increases in size without other change. On reaching full growth the female becomes filled with eggs, which ultimately give birth to the new generation. The history of the male scale is widely different from the above. Starting out in a similar way, it does not, however, attain the size of the scale of the female, and after the second moult it enters into the pupa state, and later emerges with delicate wings, resembling very much a minute gnat, and then soars about in quest of its mate. The history outlined above is practically the same for all the scale insects, the number of generations in a season depending very largely on the latitude. In the warmer sections of the country one generation follows another without a break, while in more northern States perhaps but a single generation is produced annually. In a case of infestation so bad as that of the ash tree in question, the chances are that it will have been so weakened that it will be useless to adopt any remedial measures, and it will in all probability be far better to cut down and burn the tree. The application of kerosene emulsion to the plant is the best remedy known, care being taken to wet thoroughly all the affected portions. If the application is made during the growing season, a dilution of one part of the emulsion with 15 of water is desirable. It is often advantageous, however, to apply a much stronger solution during the dormant season, at which time a dilution of one part of emulsion in 5 parts of water will do no injury to ordinary deciduous trees, and will be much more effective against the scales. If a careful watch is kept on the trees in early spring, the period when the eggs hatch will be noted by the emergence of the young and their spread to other parts of the tree. The application of the insecticide at this time will be especially effective on account of the unprotected condition of the young lice.

(5449) E. F. F. asks: What is the velocity of steam through a 1 inch pipe at 100 pounds pressure, and if a 4 inch pipe would be four times as much or more? A. The velocity of steam flowing into the air through an orifice or from the end of a short tube is 898 feet per second at 100 pounds pressure, varying but very little for differences of pressure; but the absolute quantity in pounds varies very greatly, being 39 pounds of steam per minute at 30 pounds pressure and 98 pounds per minute at 100 pounds pressure for each square inch of orifice. The increase in the size of the orifice gives only an imperceptible increased velocity, due to proportional decrease of friction on the edge of the orifice. It is the quantity that is increased by the larger orifice and in the ratio of its area.

(5450) G. P. N. says: Please give me the formulas for making sympathetic ink which require the aid of chemicals to produce the writing, also that require heat to bring out the writing. A. 1. Inks appearing through reagents. Characters written with a very weak solution of chloride of gold will become dark brown upon pouring a solution of perchloride of tin over them. Or characters written with a solution of gallic acid in water will become black through a solution of sulphate of iron, and brown through the alkalies. 2. Ink appearing by the application of heat. Write upon rose-colored paper with a solution of chloride of cobalt. The invisible writing will become blue through heat and will disappear on cooling.

(5451) S. F. says: 1. Will you please let me know what will remove fruit stains from linen? A. Most fruits yield juices which, owing to the acid they contain, permanently injure the tone of the dye, in colored goods, but the greater part may be removed without leaving a stain, if the spot be rinsed in cold water in which a few drops of aqua ammonia have been placed before the spot has dried. Wine or fruit stains on white materials may be removed by rinsing with cold water, applying locally weak solution chloride of lime, and again rinsing in an abundance of water. Some fruit stains yield only to soaping with the hand, followed by fumigation with sulphurous acid, but the latter process is inadmissible with certain colored stuffs. If delicate colors are injured by soapy or alkaline matters, the stains must be treated with colorless vinegar of moderate strength. 2. Also medicine stains in which iron and iodine were the principal ingredients. A. Try dilute hydrochloric acid, followed by ammonia. It is probable the iodine has rotted the goods so that any attempts to remove the stain will end in failure.

(5452) R. H. C. writes: Will you kindly give me a receipt or any suggestion how to remove fly specks from wall paper? I have a room papered with expensive paper, badly stained this past summer with fly dirt, and would like to learn of some remedy to remove them. A. Bread crumb not too fresh will answer to clean wall papers. Grease spots may be removed in some cases by using ether.

(5453) R. W. G. asks: What solution is used in tempering tools for granite cutting? What for marble? A. A tool that is of the best temper for granite is also the best for marble. It should be hard and tough for any use. More care in the heating and drawing the tools, so as not to burn the steel, is required than is generally given. A half pint of salt to one gallon of water is the best chilling bath. Dip endwise, and draw to the desired color for toughness.

(5454) V. L. W. asks: 1. Will you receive a shock by touching one wire or one pole on an alternating dynamo of 2,000 volts or more, being perfectly insulated from the other wire or pole? A. A comparatively slight shock may thus be received, owing to charge and discharge of the body. 2. Will you get a shock from one wire of an alternating dynamo of 2,000 volts or more through the insulation one inch thick, one wire grounded? A. Practically none if the insulation is of ordinarily good quality. 3. Is there any dynamo or any electrical machine that requires only one wire to convey the current, no ground being used? A. A true current requires a circuit. In Tesla's high frequency experiments, the luminous and incandescing effects of currents are produced without return circuits. See Tesla's "Experiments with Alternate Currents," $1 by mail.

(5455) F. T. writes: In your issue of September 9, you give a list of metric equivalents, one of which is, to convert gallons to liters, multiply by 3·8. Is this right? Should it not be 4·543? A. The factor 3·8 applies to the United States gallon of 231 cubic inches; the factor 4·543 to the imperial gallon of 277·27+ cubic inches.

(5456) F. M. W. writes: 1. I have a solution for copper plating made according to the first receipt in SUPPLEMENT, No. 310, except that by mistake I added a large excess of cyanide of potassium. Articles in circuit in it receive no deposit. Would the excess of cyanide cause this? If not, what would? If so, can I do anything to set things right or is my solution useless? A. Too much cyanide will tend to prevent precipitation. To rectify it add more copper sulphate and dilute in proportion. 2. In replating articles should all the old plating be removed in all cases? A. It is decidedly better to completely strip before replating. You also gain a certain amount of silver thereby. 3. How much prussic acid (dilute) does it take to precipitate 21 drachms of nitrate of silver? Would an excess of water in the nitrate solution use up more acid? A. This cannot be answered, as you do not tell how dilute your solution is. One part by weight of pure prussic acid combines with the silver contained in six and three-tenths parts silver nitrate. More water does not require more acid. 4. I have 1 Bunsen cell (2 quarts). Now if I expose the zinc surface equal to the surface of work in electroplating bath, will it be all right? Are the battery and solutions well balanced? A. No such general rule can be given. Your battery surface may exceed the anode surface in the bath. Regulate by different immersion of the anode, not by changing the battery surface. Do not use too strong a current, *i. e.*, too large an anode. 5. Is there any United States standard of screw threads under ¼ inch? If so, please give table. A. There is no United States standard for screw threads under ¼ inch. Manufacturers have adopted standards of their own nearly corresponding with English practice.

(5457) J. J. L. says: I read the SCIENTIFIC AMERICAN, but cannot quite catch on to one question—the cost of transmitting electric power. I had better give a supposed case. I have a 70 horse power water power turbine wheel. It will cost me $5,000 to run a canal from the dam two miles and put in a turbine at the end of the canal. What will it cost to transmit that 70 horse power or 80 per cent, or say ½—35 horse power—two miles, and apply it to the machinery there? What does it cost to carry 30 horse power two miles by wire and apply it at that distance from the water power? I know there must be a dynamo at the starting point and there must be a motor where the power is applied. What cost say of 30 horse power dynamo and motor, or any horse power, say 10, 15, 20? Next, is it practical, say to carry a saw mill or ore mill or mine lift into a mountain and use water power two miles away to run it? A. If your turbine has an actual output of 70 horse power, you should be able to realize 50 horse power at 2 miles without difficulty by electric transmission, by running a 70 horse power dynamo at the location of power, and any required number of electric motors up to a total of 50 horse power at various points two miles distant, at a total cost somewhat more than you quote for a canal. The 70 horse power dynamo will cost about $2,000, and as much more for the motors, including regulators. The wiring will foot up another thousand dollars. Shafting and belting with a house must be also provided. The care of such a power plant is much greater than by the canal system, needing the constant attention of at least one man. If 30 horse power only is required, $5,000 will cover the whole cost. A 10 horse power motor will cost $500, 20 horse power $800. The transmission of power is perfectly practicable and is largely in use in mining and for mechanical purposes.

(5458) J. E. E. asks: 1. Is it possible to light a kitchen fire with the current of one or two ordinary cells? A. It is possible to kindle a fire by such agency? 2. Kindly describe method. A. Carry the wires to the grate and connect them by an incandescing fuse. This may be made of a very short piece of thin iron wire stretched over some sulphur on a block or piece of kindling wood and partly embedded in the sulphur. When the current is turned on, the wire will become hot and will ignite the sulphur. This will ignite the wood. A new fuse must be used for each lighting. 3. Describe a fusion valve. A. A poppet valve may have its poppet held down by a strip of fusible alloy stretched across the opening. If a fire occurs, the strip melts and the pressure drives the poppet away. 4. How many horse power does it take to run the dynamo of SCIENTIFIC AMERICAN SUPPLEMENT, No. 865? A. Six to eight horse power.

(5459) M. F. writes: 1. We have an electric light system here which runs lights until about midnight. Can I use the current supplying incandescent lamps, of 110 volts, to charge a storage cell to furnish current for a lamp for the balance of the night? A. Yes. For charging use a current of proper amperage, using a resistance coil to determine its strength. The battery is made to be charged by a definite current, and on this account you must have your resistance. Use wire large enough not to get too hot. 2. What size storage cell would be needed, and how many candle power would be practical for the lamp? A. The capacity of the cell answers this with one proviso. You cannot use less than thirty cells in series to get good voltage. It is far better to use special low resistance lamps for your battery service.

(5460) T. L. C., G. L., and others ask how to mount photographs on glass. A. Take 4 ounces gelatine and soak half an hour in 16 ounces of water, put the jar in a large dish of warm water and dissolve the gelatine. When dissolved, pour into a shallow tray. Have your prints rolled on a roller, albumen side out, take the print by the corners and pass rapidly through the gelatine, taking great care to avoid air bubbles. Hang up with clips to dry; when dry, squeeze carefully on to the glass. The better the quality of glass, the finer the effect. G. L. also asks how to keep fish glue in a liquid state. A. Use 16 parts by weight of nitric acid to each 100 parts of glue and 250 parts of water.

TO INVENTORS.

An experience of forty-four years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

October 24, 1893,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Abrading or polishing materials to cutting and polishing tools, device for supplying, J. Camberon ... 507,212
Advertising balloon, E. S. Reed ... 507,165
Aerating apparatus, B. F. Tatman ... 507,392
Alarm. See Fire and stable alarm. Railway alarm.
Amalgamating machine, S. W. Vale ... 507,465
Animal trap, W. H. Castle ... 507,417
Animals, means for transporting seminal fluid of, J. S. Wintermute ... 507,193
Armature coil for dynamos, G. Wilkies ... 507,297
Armature, dynamo, J. J. Wood ... 507,194
Atomizer, W. H. Payne ... 507,160
Automatic switch, F. A. Chapman ... 507,352
Axle box, car, Kinsell & Leavens ... 507,141
Axle box lids, guard attachment for car, Busenbenz & Woltmann ... 507,105
Axle, wagon, G. W. Taylor ... 507,181
Axles, shoulder cutter for vehicle, J. Sovereign ... 507,389
Basin waste or overflow, H. C. Montgomery ... 507,237
Bathtub leg, W. Bunting, Jr ... 507,259
Bathing apparatus, electro-thermal, W. F. Howe ... 507,367
Battery. See Secondary battery. Storage battery.
Bearing, roller, E. F. Morse ... 507,153
Bearing, roller, Purdon & Walters ... 507,162
Bearing, spindle, G. O. Draper ... 507,355, 507,356
Bed, folding, A. M. Brainard ... 507,103, 507,104
Bed rail holder, A. G. McLaurin ... 507,326
Bee escape, R. J. Stead ... 507,506
Belt, conveyer, R. Niedergesaess ... 507,156
Bicycle, A. Fyrberg ... 507,116
Bicycle, E. Warwick ... 507,513
Billiard cue, R. N. Barger ... 507,471
Binder, temporary, C. T. Rosenthal ... 507,388
Bleaching, etc., apparatus for and process of, E. Bentz *et al* ... 507,404
Board. See Ironing board. Matrix board. Tally board.
Boat. See Life boat. Portable boat.
Bobbin or spool, Haynes & Wilcock ... 507,124
Boiler scale, apparatus for removing, H. Baschy ... 507,203
Boilers, pipe or flue connection for steam, H. E. Harrington ... 507,321
Bolt, T. Lafon ... 507,277
Book backs, machine for forming, Friedrichs & Brede ... 507,115
Boot nailing machine, R. W. Bateman ... 507,472
Border or edging for fabrics, J. M. Merrow ... 507,234
Bottle washer, R. Rushmore ... 507,330
Box. See Mail box.
Bracket. See Shade hanger bracket.
Brake. See Car brake. Pressure brake. Railway slot brake. Vehicle brake. Wagon brake.
Brick kiln, continuous, C. F. Kaul ... 507,274
Brick machine, dry press, Blanks & Lefebure ... 507,477
Brick or tile machine, G. S. Tiffany ... 507,248
Brush, shaving, H. J. Smith ... 507,462
Buffing or polishing wheel, J. Chase ... 507,214
Buildings, facing, J. W. Graham ... 507,430
Burial casket lid, Stein & Rappleyea ... 507,292
Bust supporter, L. Lendry ... 507,373
Button drilling machine, R. J. Ostick ... 507,384
Cable crossing guard, J. W. Hentz ... 507,497
Can. See Sheet metal can.
Can opener, D. B. Sanford ... 507,171
Car brake, J. R. Cribbs ... 507,311
Car brake, Wilson & Fetzer ... 507,469
Car coupling, E. D. Bond ... 507,102
Car coupling, E. L. Meigs ... 507,376
Car coupling, Sweet & Sessions ... 507,180
Car coupling, C. A. Tower ... 507,511
Car coupling, W. C. Watson ... 507,296
Car draught device, J. Timms ... 507,293
Car heating apparatus, T. R. Yates ... 507,302
Car platforms, folding gate for, W. S. Adams ... 507,092
Car safety device, street, J. M. Kelly ... 507,138
Car safety fender, tram, H. S. Robins ... 507,167
Car step, folding, M. E. Campany ... 507,415
Car wheel and axle, G. W. Fairman ... 507,265
Cars, automatic safety attachment for street, C. E. Baggesen ... 507,201
Carbon dioxide, apparatus for making, E. Luhmann ... 507,143
Carpet fastener, stair, A. C. Kuster ... 507,517
Carrier. See Freight carrier. Trace carrier.
Cash register, H. A. Bierley ... 507,256
Cash register, C. F. Hamilton ... 507,129
Cash register and indicator, J. A. Barnes ... 507,097
Cash register and indicator, T. Carney ... 507,351
Cash register and indicator, L. Ehrlich ... 507,313
Cash register and indicator, W. W. & W. H. Wythe ... 507,301
Casting, J. C. Hill ... 507,365
Chain, drive, W. H. Hart ... 507,362
Chain, making, I. L. Atwood ... 507,346, 507,347
Chain making machine, F. Egge ... 507,263
Chair and sofa bed, L. Hirschfeld ... 507,270
Chuck, screw machine, A. C. Fitz ... 507,315
Churn, Cameron & Potter ... 507,414
Cigar bunching machine, L. T. Cornell ... 507,487
Cigar bunching machine, Smith & Pease ... 507,177
Clamp. See Paper clamp.
Clamping machine, W. Horrocks ... 507,131
Cleaner. See Flue cleaner. Grain cleaner. Harrow cleaner. Pipe trap cleaner. Trolley wire cleaner.
Cleaning compound, Bazille & Partridge ... 507,473
Closet. See Dry closet. Water closet.
Cloth pressing machine, Kirk & Lee ... 507,229
Clothes line, chain, H. E. Percival ... 507,161
Clutch, Gable & Detrick ... 507,117
Cock or faucet, J. H. Savill ... 507,456
Collar, horse, R. Brownson ... 507,209
Commutator brush holder, J. J. Wood ... 507,344
Concrete pipes in situ, manufacturing monolithic, E. L. Ransome ... 507,521
Connector, C. Bell ... 507,403
Cooker, steam, W. J. H. Gluck ... 507,359
Cooking utensil, A. W. Obermann ... 507,281
Cooking utensil, bean, N. Ames ... 507,199
Core, green sand, C. F. Bingham ... 507,406
Corset, E. R. Caperton ... 507,482
Cotton conveyer. seed, F. C. Gammons ... 507,358
Coupling. See Car coupling.
Crane, H. Aiken ... 507,303
Crate, carrying, Moss & Hillyard ... 507,446
Creamer, centrifugal, A. Lentsch ... 507,442
Crocheting machine, G. D. Munsing ... 507,238
Crushing or grinding machine, C. Kimplen ... 507,140
Cultivator, W. F. Cochran ... 507,309
Cultivator, combination, W. S. H. Wailes ... 507,295
Curling iron, W. M. Cleeland ... 507,108
Curtain fixture, G. W. MacKenzie ... 507,146
Curtain fixture, R. Malin ... 507,443
Curtain or blind support, J. Fraley ... 507,266
Curtain, window ventilating, W. Amos ... 507,520
Cut-out, L. W. Miller ... 507,150
Cutter. See Glass cutter. Meat cutter.
Die. See Trimming die.
Dish drainer, E. C. Marshall ... 507,233
Door, combined screen and storm, C. R. Moore ... 507,151
Door operating apparatus, electric, Hicks & Troy ... 507,269
Dough mixing machine, G. W. Greig ... 507,360
Draught equalizer, O. S. Ellithorp ... 507,113
Draught hook, F. Giles ... 507,429
Dry closet, S. L. Bailey ... 507,202
Dust collector, W. H. Hankinson ... 507,319
Edging for fabrics and forming same, J. M. Merrow ... 507,235
Edging or border, J. M. Merrow ... 507,236
Electric heater, C. L. Coombs ... 507,217
Electric motor, reciprocating, H. Pieper, Fils ... 507,449
Electric selecting device, S. S. Bogart ... 507,205, 507,206
Electric wires, distributing frame for, Ford & Lenfest ... 507,424
Electrical currents, apparatus for controlling the application of, R. Lundell ... 507,144
Electrical distribution, system of, Stanley, Jr., Kelly ... 507,391
Electrode, F. M. Lyte ... 507,374
Elevator. See Ore elevator. Water elevator.
Elevator guide sheave, N. P. Otis ... 507,157
Emery wheel and support, C. L. Hyde ... 507,223
Engine. See Expansion engine. Gas engine. Hydraulic engine. Locomotive engine. Quadruplex engine. Rotary steam engine. Steam engine.
Engines, electrical ignitor for gas or hydrocarbon, P. A. N. Winand ... 507,515, 507,516
Expansion engine, multiple, C. C. Worthington ... 507,196
Extension table, E. F. Baum ... 507,401
Extractor. See Stump extractor.
Eyeglasses, C. M. Haynes ... 507,434
Fan, J. Arthur ... 507,253
Fan or blowing apparatus, P. Mortier ... 507,445
Fence strands, implement for tightening wire, E. G. Rogers ... 507,454
Fencing, making barbed, T. V. Allis ... 507,198
Fencing, making barbed, E. Jordan ... 507,227
Fencing, making barbed, J. H. Templin ... 507,182 to 507,186
Fencing, making metallic, T. V. Allis ... 507,197
Fender. See Car safety fender.
Fibers, manufacture of colored tops or slivers from combed animal, E. Maertens ... 507,232
Fibers, softening vegetable, Jones & Warr ... 507,225, 507,501
Fifth wheel, M. J. Delaney ... 507,422
File holder, J. C. Keefe ... 507,228
Filtering and sterilizing apparatus, J. H. Eickershoff ... 507,264
Fire and stable alarm and horse releaser, electric, A. R. Holmes ... 507,322
Firearm sight, E. G. Latta ... 507,278
Fire escape, C. E. Sansoucy ... 507,455
Fireplace, W. Spinner ... 507,390
Flue cleaner, boiler, C. S. Dean ... 507,421
Flushing tank for closets, J. Michel *et al* ... 507,149
Freight carrier, A. T. Kelliher ... 507,137

© 1893 SCIENTIFIC AMERICAN, INC.

Fuel blocks, manufacture of, G. Spiecker 507,246
Furnace. See Metallurgical furnace.
Furnace, A. Anderson 507,095
Gauge. See Pressure gauge.
Game apparatus, Z. E. Bates 507,098
Game apparatus, J. Huebner 507,323
Gas engine, Hirsch & Schilling 507,436
Gas, manufacturing, M. P. Goff 507,491
Gas, manufacturing, H. M. Young 507,252
Gas, obtaining hydrogen and carbonic acid, F. Salomon 507,331
Gas, process of and apparatus for making and burning fuel, G. Jones 507,500
Generator. See Steam generator.
Glass articles, manufacture of hollow, L. Appert. 507,400
Glass beveling machine, plate, E. Hill 507,127
Glass bottles, mould for making, T. W. Synnott.. 507,337
Glass cutter and guide therefor, E. Walsh, Jr..... 507,395
Grain binder reel, H. Benroth 507,255
Grain bins, construction of hopper bottom, Macdonald & Metcalf 507,324
Grain cleaner and grader, gravity and cut-off, D. J. Davidson 507,488
Grater, A. H. Scarles 507,287
Gun, repeating air, E. E. Bailey 507,470
Hammer, tack, J. Gose 507,317
Hammock, G. B. French 507,426
Hanger. See Lamp hanger.
Hanger, W. Trewhella 507,394
Harp support, mouth, J. Gose 507,318
Harrow cleaner, disk, W. A. Daley 507,312
Hay loader, E. W. Daily 507,109
Hay press, F. P. Fowler 507,425
Hay press, A. G. Wilson 507,250
Header attachment, J. Garrett 507,427
Heater. See Electric heater.
Heater and condenser, Paull & Brown 507,385
Heating and welding apparatus, electric, C. L. Coffin 507,419
Hinge, adjustable, C. N. Partlow 507,242
Hinge butts, structural blank for, E. C. Smith 507,336
Hinge, gate, Watkins & Rugg 507,191
Hollow articles, method of and apparatus for manufacturing, R. R. Singer 507,175
Hook. See Draught hook.
Hoop cutting machine, J. Naylor, Jr 507,503
Horse detacher, J. Smaill 507,461
Horseshoe, C. C. Jerome 507,272
Horseshoe, G. C. Kline 507,276
Horseshoe, nailless, R. D'Anvers 507,420
Hot water appliance, D. M. Small 507,519
Hydraulic engine, double-acting, F. Bernardi 507,405
Hygienic purposes, application of electricity to pianos or other keyed instruments for, W. Willeringhaus 507,298
Ice cream freezer, W. S. Rolston 507,329
Indicator. See Station indicator.
Induction coil adjustable, E. M. Senseney 507,458
Insole, G. Gambino 507,490
Insulated wire, H. H. Brown 507,257
Insulator, trolley wire, M. S. Williams 507,299
Iron. See Curling iron. Sad iron.
Ironing board, A. J. Harksen 507,221
Joint. See Rail joint.
Key, S. C. Bole 507,408
Kiln. See Brick kiln. Limestone burning kiln.
Label holder, F. D. Thomson 507,393
Labeling machine, H. H. Leister 507,372
Lampblack machine, G. L. Ester 507,220
Lamp hanger, electric, G. P. Hiler 507,364
Lamps, hanger board for electric arc, J. J. Wood. 507,343
Latch and support, gate, L. D. Latimer 507,231
Latch, gate, Nell & Corcoran 507,155
Lathe, turning, W. Von Pittler 507,283
Lawn rake, W. W. Carlisle 507,484
Leather dressing machine, W. Evans 507,314
Leather, making artificial, J. Chase 507,213
Life boat, J. A. Aniello 507,096
Limb, artificial, J. F. Read 507,453
Lime kiln, cupola, or metal[illegible] furnace, E. J. Bird 507,204
Limestone burning kiln, J. Briggs 507,411
Line holder. T. R. Chamblin 507,418
Liquid dispensing apparatus, W. M. Fowler 507,316
Lock, Tracy & Noble 507,188
Locomotive, electric, J. T. Wilson 507,396
Locomotive engine, compound, F. W. Dean 507,353
Loom, R. Rigby 507,328
Loom shedding mechanism, T. C. Orndorff 507,240
Lubricator, G. W. Boyd 507,409
Lubricator, S. F. Woodworth 507,397
Machine feed mechanism, Hauck & Comstock 507,496
Mail box, P. H. Beenck 507,474
Map holder, H. Smith 507,178
Match bunching machine, C. B. Andrews 507,399
Matrix board, Carr & French 507,485
Measure and funnel, combined, J. H. Bradnack... 507,479
Measuring device for box covering machines, A. G. Potter 507,451
Measuring machine, cloth, J. E. Windle 507,300
Meat cutter. O. D. Woodruff 507,195
Mechanical apparatus, device for selecting and operating, R. Mackie 507,147
Mechanical devices, apparatus for selecting and operating, R. Mackie 507,148
Mechanical movement, C. Lloyd 507,142
Metallic roller, F. G. & A. C. Sargent 507,332
Metallurgical furnace, G. F Simonds 507,460
Metals, electrolytic production of, C. Hoepfner.. 507,130
Mill. See Pulverizing mill.
Mirror maze, G. V. Palm 507,159
Mould. See Type mould.
Mould, mould facing, and core and making same, B. Jones 507,226
Mortar, druggist's and chemist's, F. L. Brashear.. 507,410
Motor. See Electric motor. Water motor.
Motor, B. L. Pickard 507,327
Motor, N. L. Turner 507,464
Nail machines, die for wire, R. Naysmith 507,379
Net, fly, C. E. Rhinehart 507,285
Nut locks, making, W. E. Spooner 507,291
Nut, wagon, W. H. & B. H. Collins 507,310
Oil, process of and apparatus for deodorizing and refining crude, R. H. Laird 507,230
Ore elevator, L. J. Hewes 507,126
Ore leaching apparatus, W. D. Bohm 507,350
Ore washer and concentrator, C. F. Pike (r) 11,377
Oven, W. Dalton 507,110
Paper clamp, W. C. Bowry 507,478
Paper feeding machine. T. A. Briggs 507,308
Pen, stylographic, D. W. Beaumel 507,348
Pencil sharpener, H. W. Hopkins 507,437
Petroleum, refining, H. Koehler 507,441
Pins or brooches, stock for hinge joints of, B. A. Ballou 507,254
Pipe. See Tobacco pipe.
Pipe trap cleaner, waste, E. Helfensteller, Jr..... 507,435
Pipes, detachable jacket for steam, W. A. Macan 507,145
Plane guide, J. McKnight 507,378
Planter, potato, A. G. Gekeler 507,428
Plow, W. T. Hogg 507,271
Plow, J. L. Pearson 507,282
Plow, W. M. Taylor 507,509
Plow attachment, G. I. Bjorneby 507,475
Pocketbooks, etc., frame for, A. W. Scheuber 507,457
Portable boat, C. W. King 507,439
Powder. See Smokeless powder.
Press. See Hay press. Printing press. Printing plate bending press.
Pressure brake, fluid, A. H. Moyes 507,447
Pressure gauge, H. Rauser *et al* 507,387
Printing plate bending press, A. Gray 507,431
Printing press, C. A. Corbitt 507,486
Printing press numbering attachment, W. B. Carr 507,416
Propeller, L. D. B. Shaw 507,459
Propeller, screw, H. C. Happold 507,320
Propeller, screw, J. D. Muller 507,502
Protractor, B. H. Colby 507,216
Puller. See Skewer puller.
Pulleys, facing, C. T. J. Vautin 507,467
Pulverizing mill, E. C. Griffin 507,432
Pump controlling device, automatic, Burrows & Clark 507,211
Puzzle, W. Churchill 507,215
Puzzle card case, A. F. Smith 507,244
Quadruplex engine, E. W. Harden 507,433
Rail joint, M. C. Niles 507,382
Railway alarm, A. T. Roberts 507,286
Railway, closed conduit electric, R. Weir 507,339
Railway conduit, electric, G. F. Green 507,493
Railway signal, electric, A. B. Herrick 507,125
Railway slot brake, conduit, W. M. Hood 507,366
Railway switch, automatic safety, H. C. O. Gruhlke 507,495
Railway system, L. Beecher 507,402
Railway tie, C. E. Steiner 507,179
Railway time and block signal, A. H. Thorp 507,510
Railway time signal, A. C. Gordon 507,492
Railway train protector, L. E. C. J. Beerstecher.. 507,349
Railway trains, electric alarm signal for, J. M. Rupel 507,170
Rake. See Lawn rake.
Register. See Cash register.
Rein and tail holder, driving, B. Blake 507,476
Rendering tank, E. Holthaus 507,222
Renovator, C. Karlson 507,369
Resistance coil, J. J. Wood 507,345
Riveting machine, C. H. Norton 507,239
Roller. See Metallic roller.
Rolling mills, automatic feeding device for, J. Robertson 507,166
Rotary steam engine, J. Hill 507,128
Rubbing machine, C. S. Yarnell 507,251
Rubbing or polishing machine, S. F. Moore 507,280
Sad iron, H. W. Tibbals 507,338
Sandpaper wheel or roller, F. H. Stubbe 507,508
Saw jointer, E. B. Pike 507,386
Saw set, C. Morrill 507,152
Scale, spring, G. H. Chatillon 507,107
Screen. See Window screen.
Screen holder, W. Wuestefeld 507,398
Screw machine, C. Grotz 507,494
Seat. See Window seat.
Secondary battery, C. A. Smyth 507,463
Self-closing and self-locking switch, Tracy & Noble 507,187
Sewing machine, J. Schaack 507,243
Sewing machine, fair-stitch, E. F. Mower 507,377
Sewing machine guide, J. Douglas 507,112
Sewing machine guiding device, J. Douglas 507,489
Sewing machine, shoe, F. J. Freese 507,267
Sewing machine shuttle and shuttle-actuating mechanism, D. Williamson 507,192
Sewing machine, welt guide, J. G. Greene 507,119
Sewing on buttons, machine for, String & Miller.. 507,507
Shade guide strip, window, F. C. Schroeder 507,288
Shade hanger bracket, J. E. Knapp 507,440
Sheet metal can, E. Barrath ..... 507,305 to 507,307
Shoe, J. H. Mulligan 507,151
Shoe fastening, G. A. Weld 507,249
Signal. See Railway signal. Railway time signal. Railway time and block signal.
Signals, electric apparatus for controlling, M. B. Leonard 507,518
Skewer puller, G. P. Pilling 507,450
Sled, coasting, A. R. Ayres 507,200
Slicer, potato, H. B. O'Connell 507,383
Smokeless powder, M. E. Leonard 507,279
Spring. See Vehicle spring.
Stamp vending machine, W. H. Kaltenbeck 507,368
Stand. See Washstand.
Station indicator, J. Rodriguez 507,168
Steam engine, J. S. Sherman 507,173
Steam engine, C. White 507,468
Steam generator, E. E. Roberts 507,504, 507,505
Steam generator, R. G. Ruffles 507,169
Steam trap, thermostatic, E. E. Gold 507,268
Steering apparatus, hydraulic, C. S. Irwin 507,135
Stone breaker or crusher, Gates & Hewes 507,118
Stone sawing machine, G. E. Fossick 507,357
Storage battery, C. W. Kennedy 507,139
Stove, A. W. Alger 507,093
Stove, E. J. Daschbach 507,219
Stove or range grate, C. H. Resor 507,284
Stovepipe attachment, G. C. Allen 507,094
Street sweeper, T. W. Downs 507,354
Street sweeper, C. Gurney 507,361
Stump extractor, P. Hansen 507,121
(Surgical.) Appliance for spinal complaints, P. B. Shelden 507,172
Switch. See Automatic switch. Railway switch. Self-closing and self-locking switch.
Switch clearing, salting, and operating device, C. H. Cropsey 507,261
Switch frog, safety hinge, J. E. Dunlevy 507,423
Switch stand, W. W. Snow 507,245
Table. See Extension table.
Tally board, croquet, Mortensen & Larsen 507,444
Tally board for roquet, game, A. T. Dana 507,111
Tank. See Flushing tank. Rendering tank.
Thrashing machine band cutting and feeding attachment, L. & W. Quintus 507,163
Thrashing machine self-feeder, J. Juel 507,438
Tire, pneumatic, A. P. Morrow 507,325
Tires, inflating device for pneumatic, H. H. Johnson 507,224
Tobacco pipe, T. C. Orndorff 507,241
Tongue support, vehicle, J. Johnson 507,136
Tongues, etc., blank for vehicle, R. R. Singer 507,176
Toy figure, C. J. Simonot 507,174
Toy or ornamental bird or winged animal, G. H. Newton 507,381
Trace carrier, Randall & Chase 507,164
Trap. See Animal trap. Steam trap.
Trap, W. J. Vierck 507,190
Trimming die, Coleman & Tenney 507,260
Trolley wire cleaner, C. H. Thompson 507,247
Truck, hand, E. Cardarelli 507,106, 507,483
Truck, motor, J. A. Brill 507,207, 507,208
Twine making machine, F. G. Becker 507,100
Type matrix, W. Kemp, Jr 507,275
Type mould, F. H. Bultman 507,258
Typewriter manifolding device, H. H. Unz 507,189
Umbrella support, N. D. Brooks 507,481
Valve, air, A. T. Neilson 507,380
Valve for air brakes, triple, H. L. Howe. 507,132, 507,133, 507,498
Valve for fluid pressure brakes, triple, H. L. Howe 507,134
Vehicle brake, C. K. Brandenburg 507,480
Vehicle, side hill, C. Koenig 507,370
Vehicle spring, Hipple & Wolf 507,129
Velocipede, T. Broadbent 507,412
Velocipede, Fane & Lavender 507,114
Velocipede saddle, T. Broadbent 507,413
Velocipede saddle, E. Warwick 507,514
Vessel or boat, roller, E. Bazin 507,099
Wagon, F. E. Havens 507,123
Wagon body or rack, W. P. Dunlap 507,262
Wagon brake, J. H. Ozley 507,158
Wagon, dumping, G. W. Harrington 507,122
Washer. See Bottle washer. Ore washer.
Washer cutting machine, A. Buchholz 507,210
Washstand, Phinney & Whitney 507,448
Water closet, H. A. Jukes 507,273
Water elevator, steam vacuum, Sattelkau & Winkelmann 507,335
Water elevator, steam vacuum, H. R. Winkelmann 507,342
Water elevator, steam vacuum, Winkelmann & Sattelkau 507,340
Water elevator, vacuum, P. Sattelkau 507,334
Water elevators, reserve tank for, H. R. Winkelmann 507,341
Water motor, T. J. Vance 507,294
Water power, device for utilizing, T. A. Macdonald 507,375
Waterproof suit, O. Van Oostrum 507,466
Welding apparatus, pipe, J. Simpson 507,289
Wheel. See Buffing or polishing wheel. Car wheel. Emery wheel. Fifth wheel. Sandpaper wheel.
Wheel, C. W. Smart 507,290
Window screen, J. A. Haviland 507,363
Window seat, adjustable, W. Kruppenbacher 507,371
Wire cutting machine, W. H. Boggs 507,101
Wire stretcher, W. Q. Prewitt 507,452
Wood cutting machine, W. F. Hutchinson 507,499
Wood, etc., finishing the surface of, V. Victorson 507,512
Wool drying apparatus, J. E. Barney 507,304
Wool washing machine, F. G. Sargent 507,333
Wrench, S. C. Bole 507,407

DESIGNS.

Brougham body, F. P. Stone 22,855
Lantern, G. C. Dressel 22,854
Monument, W. H. Perry 22,856
Pencil sharpener, J. R. Foster 22,853
Wall paper, C. Booze ..... 22,838 to 22,852

TRADE MARKS.

Boots, shoes, and slippers, R. E. Larcom 23,728
Bottles, nursing, W. M. Decker 23,754
Canned sweet corn, E. H. Lounsberry 23,736
Cigarettes, American Tobacco Company 23,740
Cigars, Berninger Bros 23,741
Crackers or biscuits, New York Biscuit Company .. 23,737
Hair clippers, American Shearer Manufacturing Company 23,733
Hair preparation, M. S. Kelso 23,747
Ingots or other castings of brass, Manganese Bronze and Brass Company 23,732
Ingots or other castings of bronze, Manganese Bronze and Brass Company 23,731
Jewelry, spoons, forks, ladles, cutlery, and similar articles, F. N. Osborne 23,729, 23,730
Lard, J. M. Ceballos & Company 23,738
Medicinal whisky for lung diseases and debility, J. F. Broderick 23,746
Mineral water, B. Chrisman 23,742
Oil and its extract and medicinal and sanitary compounds having these constituents, eucalyptus, Tasmania Eucalyptus Oil Company 23,751
Powders, liver, L. Alexander 23,750
Remedies for rheumatic, venereal, and nervous diseases, and other disorders of the skin and blood, W. L. Curtiss 23,749
Remedy for cancers, M. A. C. Millen 23,748
Sardines, M. Amieux & Cie 23,739
Sewing machines and sewing machine attachments, Domestic Sewing Machine Company 23,735
Whisky, G. Benz & Sons 23,744, 23,745
Whisky, J. Buchanan 23,743

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. **Other foreign patents may also be obtained.**

Advertisements.

ORDINARY RATES.
Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line
☞ *For some classes of Advertisements, Special and Higher rates are required.*
The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

Patent Foot Power Machinery.
Complete Outfits.

Wood or Metal workers without steam power can successfully compete with the large shops, by using our New **LABOR SAVING Machinery,** latest and most improved for practical Shop Use, also for Industrial Schools, Home Training, etc. Catalogue free.
Seneca Falls Mfg. Co.
695 Water Street, Seneca Falls N. Y.

WILSON IMPROVED IRON PLANERS.
STANDARD SIZES & KEPT IN STOCK. W. A. WILSON RIVER ST. ROCHESTER, N.Y.

IMPROVED ENGINE LATHES MODERN DESIGNS
Also Foot Lathes, Tools and Supplies. Catalogue Free
Sebastian Lathe Co. 120-122 Culvert Street CINCINNATI, OHIO.

EDISON PHONOGRAPHS FOR SALE.
ADDRESS
North American Phonograph Co.
30 Park Place, New York.
Masonic Temple Bldg., **Chicago.**

SCIENTIFIC AMERICAN DYNAMO.
Description of a plain shunt-wound dynamo of simple construction, capable of supplying a current of from 60 to 75 110-volt incandescent lamps, or of being used as a 5 h. p motor. This machine was constructed especially for the benefit of the readers of the *Scientific American*, by Mr. W. S. Bishop, of New Haven, Conn. It is designed to meet the wants of mechanics and amateurs who desire to construct a simple dynamo for their own use, but who do not care to enter into the subject scientifically. With 24 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **865.** Price 10 cents. To be had at this office and from all newsdealers.

New Full Mounted Lightning Screw Plate,
Send for Catalogue.

Wiley & Russell Mfg. Co., Greenfield, Mass., U.S.A.

SCIENTIFIC EXPERIMENTS. — DESCRIPTION of some simple and easily performed scientific experiments. Foucault's pendulum, exchange of water and wine, the bird in the cage, the five-pointed star, the sum of the angles of a triangle, surface of the sphere, with 6 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **875.** Price 10 cents. To be had at this office and from all newsdealers.

PRINT YOUR OWN CARDS
PRESS, $3
Larger size, for circulars, $8.
Small newspaper press, $44.
Money saver or money making business. Full printed instructions. Send stamp for catalogue of presses, type, paper, etc. **KELSEY & CO.,** Mfrs., **Meriden, Conn.**

IF YOU HAVE ANY SMALL ARTICLES in Brass or Iron that you want manufactured in quantities, write to THE JONES BROS. ELECTRIC CO., 28-30-32 West Court St., Cin'ti, O.

GATES ROCK & ORE BREAKER

Capacity up to 200 tons per hour.
Has produced more ballast, road metal, and broken more ore than all other Breakers combined.
Builders of High Grade Mining Machinery. Send for Catalogues.
GATES IRON WORKS,
50 C So. Clinton St., Chicago
136 C, Liberty Street, New York,
237 C, Franklin St., Boston, Mass

DIAMONDS, MANUFACTURE OF.—An interesting description of Mr. Henri Moissan's method of manufacturing diamonds artificially from carbon and sugar by means of an improved electric furnace. With 2 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **904.** Price 10 cents. To be had at this office and from all newsdealers.


Delaney's Metallic Gaskets and Flanges make everlasting joints. **Delaney's Expansion Packings** for steam, water and ammonia are best and cheapest.
H. J. Delaney & Co., Third & Fowler Sts. Milwaukee, Wis.


MAKE YOURSELF A **MECHANICAL ENGINEER OR DRAUGHTSMAN;**
Or qualify to take charge of or to superintend the manufacture of machinery, by devoting your idle hours to **Home Study** by the method of **THE CORRESPONDENCE SCHOOL OF MECHANICS, Scranton, Pa.** To begin, students need only know how to read and write. Moderate charges. Send for FREE Circular.

BIT Bores **SMOOTH, ROUND, OVAL,** and **SQUARE HOLES. Mortising Core Boxes,** etc. Invaluable to Carpenters, Cabinet and Pattern Makers. Highest Award. Send $8.00 for set (3/8 to 11-8), in neat case, or 50c. for sample Bit, mailed free with Illustrated List.
BRIDGEPORT GUN IMPLEMENT CO., **315 Broadway, New York.**

Chain
BELTING of Various Styles, ELEVATORS, CONVEYORS,
COAL MINING and HANDLING MACHINERY.
The JEFFREY MANUFACTURING CO., COLUMBUS, O.
☞ *Send for "93" Catalogue "C."* Branches: CHICAGO—NEW YORK.

To Inventors.
E. Konigslow, manufacturer of **Fine Machinery** and **Models,** offers **Special Facilities to Inventors.** Guarantees to work out ideas in strictest secrecy, and *any improvement that he can suggest goes with the work.* Thousands of men have crude though really valuable ideas, which they lack mechanical training to develop. Novelties and patented articles manufactured by contract. **181 Seneca St., Cleveland, Ohio.**

WATER MOTORS
GAS ENGINES & VENTILATING FANS
The best Motor in the world for driving all kinds of light machinery, noiseless, neat, compact; invaluable for blowing church organs, running printing presses, coffee mills, ventilating fans, ice cream freezers, meat choppers, etc. In use the world over, and recommended by water companies everywhere. Address for circular, **Backus Water Motor Co., Newark, N. J., U.S.A.**

VANDUZEN STEAM JET PUMP
THE BEST IN THE WORLD.
Pumps Any Kind of Liquid.
Always in Order, never Clogs nor freezes. Every Pump Guaranteed.
10 SIZES.
200 to 12000 Gallons per Hour. Cost $7 to $75 each. Address
THE VANDUZEN & TIFT CO.,
102 to 108 E. Second St., Cincinnati, O.

Perfect Newspaper File
The Koch Patent File, for preserving Newspapers, Magaziues, and Pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN" in gilt. Necessary for every one who wishes to preserve the paper. Address
MUNN & CO., Publishers SCIENTIFIC AMERICAN

STEVENS PATENT
RELIABLE DIVIDER. No. 60

Forged from heavy stock. Operated with a right and left hand screw. Made with two tension screws, removing any back lash.
5 inches, price per pair $1.50
Ideal and Leader Spring Calipers and Dividers, Ideal Surface Gauges, Depth Gauges, and Fine Machinists' Tools.
☞ *Illustrated catalogue free to all.*
J. STEVENS ARMS & TOOL CO.,
P. O. Box 280, Chicopee Falls, Mass.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **59.** Price 10 cents. To be had at this office and from all newsdealers.


SINTZ GAS ENGINE CO.
GRAND RAPIDS, MICH., U. S. A.
Manufacturers of the **Sintz Stationary and Marine Gas and Gasoline Engines.** Especially adapted for Boats and Electric Lighting. Runs with manufactured or natural gas—Boats and launches. Prices within the reach of all. ☞ *Send for Catalogue.* Mention this paper

WATER-TIGHT MASONRY DAM, Construction of.—By Walter McCulloh, Jr. Details of construction of the Sodam dam and methods adopted to make it perfectly water-tight. With 4 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **914.** Price 10 cents. To be had at this office and from all newsdealers.

SEND FOR THIS BOOK
FREE ON APPLICATION
THE BABCOCK & WILCOX CO.
WATER TUBE
STEAM BOILERS
30 CORTLANDT ST. N.Y.
107 HOPE ST. GLASGOW, SCOTLAND.
MANUFACTORIES IN UNITED STATES, SCOTLAND, FRANCE, GERMANY & AUSTRIA.



HARRISON CONVEYOR!
For Handling **Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.**
Send for Circulars. | **BORDEN, SELLECK & CO.,** { Sole Manufacturers, } **Chicago, Ill.**

DRILL CHUCKS. Write "THE PRATT CHUCK CO." Clayville, N. Y., U. S. A., for free illustrated catalogue of **POSITIVE DRIVING DRILL CHUCKS.** showing the only perfect system ever devised for holding and driving drills.
Foreign Agencies: Ph. Roux et Cie., 54 Boulevard du Temple, Paris, France. E. Sonnenthal, Jr., Nueu Promenade No. 5. Berlin. Germany. Selig, Sonnenthal & Co., 85 Queen Victoria Street, London, E. C., England.

CELLULOID ZAPON CO. MANUFACTURERS OF **CELLULOID LACQUERS** AND VARNISHES FOR METAL AND WOOD
41 BARCLAY ST. NEW YORK.
GUM LACQUERS—BRILLIANT AND DEAD BLACKS—SHELLACS &C.
SOLE LICENSEES OF THE CELLULOID COMPANY.

© 1893 SCIENTIFIC AMERICAN, INC.

A FEW NEW AND IMPORTANT

TECHNICAL BOOKS.

RECENTLY PUBLISHED.

The Mine Foreman's Handbook of Practical and Theoretical Information on the Opening, Ventilating, and Working of Collieries. Questions and Answers on Practical and Theoretical Coal Mining, designed to assist Students and others in Passing Examinations for Mine Foremanships. By Robert Mauchline, ex-Inspector of Mines in Pennsylvania, Superintendent of Coal Mines. A new, revised, and enlarged edition, illustrated by 114 engravings. 8vo, 337 pages. Price.....**$2.75**

Varnishes, Lacquers, Printing Inks, and Sealing Waxes; Their Raw Materials and Their Manufacture. To which is added the Art of Varnishing and Lacquering, including the Preparation of Putties and of Stains for Wood, Ivory, Bone, Horn, and Leather. By William T. Brannt, Editor of "The Techno-Chemical Receipt Book." Illustrated by 39 engravings. 12mo, 338 pages. Price.....**$3.00**

Edwards' 900 Examination Questions and Answers for Engineers and Firemen (Stationary and Marine) who desire to obtain a U. S. Government or State License. By Emory Edwards, Marine and Mechanical Engineer. A new, revised, and enlarged edition, 240 pages. Full bound, in pocketbook form, leather, gilt edges. Price.....**$1.50**

Street Railway Motors; with Descriptions and Cost of Plants and Operation of the Various Systems in Use or Proposed for Motive Power on Street Railways. By Herman Haupt, C.E., Chief of Bureau of Military Railroads during the late war; late Chief Engineer Pennsylvania Railroad; Chief Engineer Tide Water Pipe Line. 12mo, 213 pages. Price.....**$1.75**

NEARLY READY.

A Complete Treatise on the Electro Deposition of Metals. From the German of Dr. Geo. Langbein, with additions by William T. Brannt. Illustrated by about 150 engravings. A new, revised, and enlarged edition, over 400 pages, 8vo.

☞ *The above or any of our Books sent by mail, free of postage, at the publication prices, to any address in the world*

☞ *Illustrated circulars, showing full tables of contents of all of the above valuable books, will be sent free to anyone in any part of the world who will send his address.*

☞ *Our New and Revised catalogue of Practical and Scientific Books, 88 pages, 8vo, as well as our other catalogues and circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.*

HENRY CAREY BAIRD & CO.
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

CARBUTT'S DRY PLATES AND "CELLULOID" FILMS.

Especially adapted for Photographing Machinery and other works of construction in
THE MECHANICAL TRADES.
Descriptive Price List mailed free. For sale by all Dealers.
Manufactured by **JOHN CARBUTT,**
Keystone Dry Plate and Film Works, Wayne Junc. Philadelphia.

NOTICE.

MINISTRY OF PUBLIC WORKS,
CAIRO, EGYPT.

The Egyptian Government puts up to adjudication the construction and working of a tramway line of narrow gauge from Mansourah to Menzaleh and Matarieh, with its branch lines, on the conditions of the act of concession and the specification, copies of which will be forwarded to those who apply for them by letter addressed to the Minister of Public Works, Cairo, Egypt.

Offers will be received at this Ministry up to noon on the 1st February, 1894.

Persons tendering should indicate the width of the line, and all other dispositions relative to the type of permanent way and rolling stock, and the term for which they require the concession. This term may not exceed forty years.

The Egyptian Government reserves to itself the right of selecting and accepting whichever offer it prefers, or of rejecting any offer, however advantageous it may appear to be.

WOODEN TANKS. FOR RAILROADS, WATER WORKS, MILLS, FARMS &C. COMPLETE STOCK OF CYPRESS LUMBER.
LARGE WATER TANKS. PLANS & ?A SPECIALTY. SPECIFICATIONS FURNISHED FOR FOUNDATIONS & TOWERS.
W. E. CALDWELL CO
№ 217 E. MAIN ST. LOUISVILLE KY.

INVENTORS—Before securing patents will save money by sending name and 2c. stamp for particulars to W. B. FENTON, Room 52, Bank of Baltimore, Baltimore, Md.

JUST PUBLISHED.

THE MANUFACTURE OF

Liquors and Preserves.

BY J. DE BREVANS.

PRICE $3.00, POSTPAID.

The author is an eminent French chemist who has devoted much time and study to the preparation of Liquors and Preserves. The great value of the work consists in the formulas, which number over 300, and are so arranged that, if the manufacturer has no distilling plant of his own, he can still make many of the liquors from the essences. The manufacture of French *liqueurs*, etc., from essences is very profitable and does not require large capital. The raw materials, the plant of the distiller, etc., are described according to the best modern practice. The book has 65 illustrations, 18 tables, and a full index.

☞ *Send for Table of Contents.*

MUNN & CO., Publishers,
SCIENTIFIC AMERICAN OFFICE,
361 Broadway, New York.



W. L. DOUGLAS $3 SHOE For Gentlemen.

Best Calf Shoe in the World for the Price.

W. L. Douglas' name and price is stamped on the bottom before they leave the factory to protect you against high prices. Dealers who make the price on unstamped shoes to suit themselves, charge from $4 to $5 for shoes of the same quality as **W. L. Douglas $3.00 Shoe.** If you wish to get the best shoes in quality for your money it will pay you to examine W. L. Douglas Shoes when next in need. Sent by mail, **Postage Free,** when shoe dealers cannot supply you. Send for catalogue with **full instructions** how to order by mail.

W. L. DOUGLAS, Box 551, Brockton, Mass.

Model & Experimental Work. Absolute secrecy. Advice and ideas not charged for. Send for particulars
GARDAM & SON, 98 John Street, NEW YORK.



"OTTO"

GAS AND GASOLINE **ENGINES.**

½ to 100 h. p. Can be used in cities or in country independent of gas works or gas machines.

OVER **30,000 SOLD.**

No Boiler, No Danger, No Engineer.

OTTO GAS ENGINE WORKS, PHILADELPHIA.



AGENTS COIN

Money selling **Beveridge's Automatic Cooker.** Latest and best cooking utensil ever invented. Sells at sight. **One Agent sold over 1700 in one town. One sample Cooker free** to good agents. Advertising matter furnished. For full particulars address **W. E. BEVERIDGE,** Box 728. **BALTIMORE, Md.**

VELOCITY OF ICE BOATS. A collection of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **214.** Price 10 cents. To be had at this office and from all newsdealers.

Astronomical Telescopes

of superior defining power,
Photographic Lenses, etc.
Manufactured by
W. & D. MOGEY,
Bayonne, New Jersey.
☞ Send for catalogue.



CIGAR CUTTERS.

STERLING SILVER,

Can be hung on watch chain. A useful present for a gentleman.

Well adapted for **prizes** or **favors** at CARD PARTIES, GERMANS, etc. **For sale by leading Jewelers.** If your jeweler has not got it and will not order it, send to us and we will fill order through some reliable dealer.

Price, $1.50.

Enos Richardson & Co.
23 Maiden Lane, New York.

LIFE SAVING DEVICES.—A collection of suggestions of devices for communicating between the shore and stranded vessels, offered to the London *Daily Graphic* by various correspondents. With 100 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **848, 849, 850, 851, 852, 854, 861, 862, 864, 869, 871, 874** and **884.** Price 10 cents each, or $1.30 for the series. To be had at this office and from all newsdealers.

"OLD RELIABLE INCUBATOR"



Leads Them All.

More Testimonials for same number of Machines Sold, than any other Hatcher made.

☞ *Send 4c. in stamps for Illustrated Catalogue.* Full of valuable information.

ADDRESS
Reliable Incubator & Brooder Co., Quincy, Ill.

WANTED—Either to buy or to push a Patent of general utility. Address, by letter, A. B., care of Chas. Lubrecht, 195 Pearl Street, New York.

CONTRACTS WANTED FOR LIGHT METAL WORK WILL BE GLAD TO MAKE PRICES LOW
SEND IN YOUR ORDERS
SPECIAL FACILITIES FOR MAKING **MODELS**
T. F. WELCH MFG. CO. 6 DUDLEY ST. BOSTON

PARSONS HOROLOGICAL INSTITUTE.

LEARN the WATCH TRADE

Engraving and Jewelery Work.

☞ *Circular free.*

PARSONS, IDE & CO., 302 Bradley Ave., PEORIA, ILL.

The "National" Typewriter

IRRESPECTIVE OF PRICE THE BEST.

Built upon well-known, true and tried principles. It's the easiest to learn and handiest in use. It is the greatest Manifolder. Have you seen our Illuminated work? Many new features. Write for pamphlet and specimen of work.

$60

NATIONAL TYPEWRITER CO., 715, 717, 719 Arch St., PHILADELPHIA, PA.

WANTED—A manufacturer of Bright Cold-Rolled Steel wishes to correspond with parties owning or controlling patented novelties which could be manufactured out of this material.
Address **J. G.,** Box 773, NEW YORK.

PATENTS

CAVEATS, TRADE MARKS
COPYRIGHTS.

Messrs. Munn & Co., Solicitors of Patents, have had nearly fifty years' continuous experience and the most remarkable success. Many thousands of the best patents have been secured through their *Scientific American Patent Agency,* which, for reliability, promptness, careful work, and moderate terms, enjoys a world-wide reputation.

Any one who has made an invention may quickly ascertain, free of charge, whether it is probably patentable, simply by writing to Munn & Co. All communications strictly confidential. A Handbook of Information concerning patents and how to obtain them sent free.

Patents taken through Munn & Co. receive special notice in the *Scientific American,* and thus are brought widely before the public without cost to the inventor. This splendid paper issued weekly, elegantly illustrated, has by far the largest circulation of any scientific work in the world. $3 a year. Specimen copies sent free. Address MUNN & CO., NEW YORK, 361 Broadway.

VOLNEY W. MASON & CO.
FRICTION PULLEYS, CLUTCHES, and ELEVATORS
PROVIDENCE, R. I.

WOVEN WIRE AND SEGREGATION.—By Bryan Corcoran. A paper of value to millers, in which the author systematizes some facts about sieving, materials used for sieves, meshes, weaving, effect of dead surface, passage through the meshes, relative capacity of meshes, sifting. With 18 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **916.** Price 10 cents. To be had at this office and from all newsdealers.

SELTZATEURS for home-made Soda Water, etc., $4.50 and up. Family Ice Machine $10 and up. Filters, $1.25 and up. Cookers, $1. **L. DERMIGNY, 126 West 25th St., New York.**

THE "MUNSON" TYPEWRITER.

This machine is an "evolution," the outgrowth of years of experience and the best results of scientific work. Its principles appeal at once to the educated mechanic. It is **Light, Small, Compact. Easily operated,** with **Universal Key Board.**

INTERCHANGEABLE STEEL TYPE WHEEL,

durable and easily kept in order. 30 keys, 90 characters. Weight, with carrying case, 16 pounds. Special wheels for different languages. *Send for circular to*

*** * THE MUNSON TYPEWRITER CO., * ***
162 S. La Salle Street, Chicago, Ill., U. S. A.



FREE.

A fine 14k gold plated watch to every reader of this paper. Cut this out and send it to us with your full name and address, and we will send you one of these elegant richly jeweled gold finished watches by express for examination, and if you think it is equal in appearance to any $25.00 gold watch, pay our sample price, $3.50, and it is yours. We send with the watch our guarantee that you can return it at any time within one year if not satisfactory, and if you sell or cause the sale of six we will give you **One Free.** Write at once as we shall send out samples for **sixty days only.**

THE NATIONAL M'F'G & IMPORTING CO.,
334 Dearborn Street, CHICAGO, ILL.

Rubber Rolls and Wheels.

Power Wringing Machines, Drying and Ventilating Fans. All styles of Trucks made to order. Catalogues free. **GEORGE P. CLARK,**
Box L. Windsor Locks, Conn.



MASON & HAMLIN SCREW STRINGER

One of the greatest improvements in the history of the Piano Forte.

Keeps the Piano in Tune. Much More Durable. Quality of Tone Purer.

☞ *Fully Illustrated Catalogue sent on application.*

Mason & Hamlin Organ & Piano Co.
152 TREMONT ST., BOSTON, MASS.

Before you Order and Subscribe to your

FOREIGN PERIODICALS

for next year, please send for estimate to
G. E. STECHERT, 810 Broadway, N. Y.,
Importer of Books and Periodicals.
Branches.—LEIPZIG, LONDON, PARIS.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
THOMAS DEVLIN & CO. FINE TINNING JAPANNING AND FINISHING
LEHIGH AVE. & AMERICAN ST. PHILA.

WHITE LEAD, NON-POISONOUS: Manufacture of.—By Perry F. Nursey. A valuable paper detailing several processes of white lead manufacture that are unattended by danger to health and life. The white lead evil, The deleteriousness of the old Dutch or stack system, Ameliorative measures, Thuardis process, the Martine process, the Lewis-Bartlett process, the Macivor process and Improvements therein, the Non-poisonous process, a plea for the adoption of measures for superseding the ordinary stack process by one or the other of the systems described by the author. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **904.** Price 10 cents. To be had at this office and from all newsdealers.

A COMFORTABLE PURE PILLOW.

The Torsion Braided Wire Spring Pillow is cool and cleanly. Is consick. Practically indestructible. Price, upholstered in fine hair:
Adults, 20x28, $3.50. Child's, 4x22, $2.50. Sent, express prepaid, on receipt of price. Address
Weston & Wells Mfg. Co., 1112-1116 Noble St., **Phila., Pa.**
(Pillow with one end open to show construction.)

Watchman's Improved Time Detector

with 12 or 24 Keys, with Safety Lock attachment. Patented 1875-6-7. My inventions, and will sue all concerns selling or using the Safety Lock attachment, according to Decision of Circuit Court of U. S. for S. D. of N. Y.
Send for circulars to
E. IMHAUSER, 206 Broadway, New York. P. O. Box 2875.

THORSEN & CASSADY COMPANY,
141 & 143 Wabash Ave., CHICAGO.
High Grade Pneumatic **BICYCLES** 1893
GUNS, Rifles, Ammunition, Revolvers, **KODAKS.**
SPORTING & ATHLETIC GOODS.
Send 6c. in stamps for COMPLETE CATALOGUE.

Columbian Desk Catalogue 160 pages, postage 7c. Desks from $6.00 to $600.00.
American Desk & Seating Co.
270-272 Wabash Av., **CHICAGO, U.S.A.**

LIGHTNING CONDUCTORS.—A valuable and exhaustive paper giving Reynold's instructions for erecting and testing lightning rods. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **906.** Price 10 cents. To be had at this office and from all newsdealers.

Village Fire Alarm Systems

Low cost, very efficient.
ABATIS ELECTRIC MFG. CO.
149 Fifth Avenue, Chicago.

STEEL TYPE FOR TYPEWRITERS

Stencils, Steel Stamps, Rubber and Metal Type Wheels, Dies, etc.
Model and Experimental Work.
Small Machinery, Novelties, etc., manufactured by special contract.
New York Stencil Wks. 100 Nassau St., N.Y

THE COPYING PAD.—HOW TO MAKE and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made, how to apply the written letter to the pad, how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **438.** Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

THE SIMPLEX TYPEWRITER

GUARANTEED to do as good work as any high priced machine. Specially adapted for use in private correspondence. Sent by mail or express prepaid on receipt of $2.75. In handsome walnut case, 50c. extra

Address Simplex Typewriter Co., 32 Great Jones Street, New York.

HOW TO MAKE INVENTIONS.

SECOND Edition, BOARD Cover, 180 pages, **$1.00.**

"This very complete treatise on the Art of Invention will be found most valuable to every one who has ever had an idea in regard to a new article or process or to the improving or perfecting those already in use. This ought to include every American, certainly every Yankee. The book is quite original in style, and the various hints it contains are worth many times its cost."—*From Popular Science News, June, 1893, Boston.*

Cost, postage prepaid, $1.00. EDWARD P. THOMPSON, 3 to 9 Beekman Street, New York.



THUMB SCREWS and NUTS
OF ANY DESCRIPTION.
ENGINE CASTINGS.
Booklet on receipt of stamp.
A. J. Weed & Son, 106 Liberty St., N. Y.

RAILWAY & STEAM FITTERS SUPPLIES
Rue's Little Giant Injector.
Screw Jacks, Portable Forges & Blowers.
JOHN S. URQUHART. 46 Cortlandt St., N. Y.

Progress H. G. SCHRAMM, M.E. PHILADELPHIA PA. U.S.A.
DESIGNING AND BUILDING OF NEW MACHINERY.
SUPPLY AND INSTALLATION OF STEAM ENGINES, PUMPS, ELECTRIC PLANTS.
Up To Date

© 1893 SCIENTIFIC AMERICAN, INC.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion, - 75 cents a line
Back Page, each insertion, - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

COLD FORGED PRODUCT.

Fluted Tire Bolt

Patented Nov. 11, 1890; Oct. 20, 1891.

Is stiffer and stronger than a common bolt. The fluted shank prevents the bolt from turning in the rim and tire.

COLD FORGED { MACHINE SCREWS, STOVE BOLTS, LOCK CAP SCREWS, SIDE KNOB SCREWS, THREADED WIRES

AMERICAN SCREW COMPANY,
PROVIDENCE, R. I.

BARNES' WATER EMERY TOOL GRINDER



Has no pumps, no valves. No piping required to supply it with water. Always ready for use. Simpiest in construction, most efficient in operation. Send for Catalogue and Prices.

W. F. & JOHN BARNES CO.
1999 Ruby Street. Rockford, Ill.

SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

Shingle, Heading and Stave Mill Machinery

Improved Gauge Lathe.

Handle Machinery for Turning Handles for Brooms, Axes, etc. *Send for cat. B.*

Wood Pulp Machinery. *Send for Cat. C.*

Trevor Mfg. Co.
Lockport, N. Y.

Galloupe's General Engineering Index

is indispensable to every Progressive Engineer. New volume. Postage paid, $3.00.
FRANCIS E. GALLOUPE, 30 Kilby Street, BOSTON.



POLAR ELECTRIC.

The McCONNELL
Germ Proof Filters

REMOVE MICROBES
—AND—
All Kinds of Disease Germs.
Is a Filter and Cooler Combined.
The ice as it melts is filtered.
No other gravity filter does this.

The McConnell Filter Co.
BUFFALO, N. Y.

OIL WELL SUPPLY CO.

91 & 92 WATER STREET, PITTSBURG, PA.
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral Tests. Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. *Illustrated catalogue, price lists, and discount sheets on request.*

LIGHTNING WELL-SINKING MACHINERY MANUFACTURERS.
Hyrdaulic, Jetting, Revolving, Artesian, Diamond Prospecting Tools, Engines, Boilers, Wind Mills, Pumps. **Encyclopedia,** 1,000 engravings, Earth's Strata, Determination quality water; mailed, 25c.
The American Well Works, Aurora, Ill.
11 & 13 S. Canal St., Chicago, Ill.
Dallas, Texas.

SIR RICHARD OWEN.—A SKETCH of the life and labors of this great English naturalist, accompanied with his portrait. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **909.** Price 10 cents. To be had at this office and from all newsdealers.



THE BRIDGEPORT WOOD FINISHING CO.

—MANUFACTURERS OF—

WHEELER'S PATENT WOOD FILLER.
BREINIG'S LITHOGEN SILICATE PAINT.

ADAPTED TO ALL CLIMATES ESPECIALLY MARINE EXPOSURES.

GRANVILLE M. BREINIG, GENERAL AGENT & SUPT. PRINCIPAL OFFICE, NEW MILFORD, CONN.
Branch Offices and Warehouses.—CHICAGO, 206 E. Lake Street. NEW YORK, 240 Pearl St. BOSTON, 85 Oliver St.

PAMPHLET GIVING DIRECTIONS FOR FINISHING HARD WOOD FREE TO ANY ADDRESS.

KODAKS

$6.00 TO $100.00

Eastman Kodak Company,

Send for Catalogue. Rochester, N. Y.

WATER MOTOR, $5.

BOLCIANO'S LITTLE GIANT
WILL RUN YOUR **SEWING MACHINE** and other Light Machinery.
A week's work done in a day.
No Plumbing Required.
Delivered free on receipt of price.

Patented April 25, 1893.

For Printing Presses, Lathes, Grindstones, Coffee Mills, Ice Cream freezers, Churns, Christmas Gardens, Washing Machines, etc., No. 2, price **$10.**

THE BOLCIANO WATER MOTOR CO.
414 Water Street, Baltimore, Md.

AGENTS WANTED WRITE FOR CATALOGUE AND AGENCY. **FOR FINE TOOLS IN EVERY SHOP.** **C.H. BESLY & CO.** CHICAGO, ILL. U.S.A.

THE MODERN MARINE BOILER.—By A. B. Willits, U.S.N. Description of the principal features of the boilers of the United States man-of-war New York, with a plea to inventive minds for the production of a type of boiler which shall do away with the necessity of the present enormously large and heavy shells, and present a lighter substitute that will perform the duties of both envelope and heating surface conjointly. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **870.** Price 10 cents. To be had at this office and from all newsdealers.

ELECTRO MOTOR, SIMPLE, HOW TO make. By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With **11** figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **641.** Price 10 cents. To be had at this office and from all newsdealers.

ASTRONOMY

Poole Bros. **Celestial Planisphere** and **Celestial Handbook** just published.
For descriptive circular address
POOLE BROS., CHICAGO, ILL.

"IMPROVEMENT THE ORDER OF THE AGE."

The Smith Premier Typewriter

Embodies the most Progressive Mechanical Principles.
All the Essential Features Greatly Perfected.
Perfect and Permanent Alignment.
Easiest Running, and Nearly Silent.
All type cleaned in Ten Seconds without Soiling the Hands.
The Smith Premier Typewriter Co., Syracuse, N. Y., U. S. A.
We have 20 branch offices in the principal cities throughout the United States.

Send for Catalogue.

H. W. JOHNS M'F'G CO.,

ASBESTOS
ROOFING, LIQUID PAINTS, ASBESTOS MANUFACTURES, NON-CONDUCTING AND INSULATING MATERIALS,
87 MAIDEN LANE, NEW YORK.
Jersey City. Chicago. Philadelphia. Boston.

MESSRS. MUNN & CO., Solicitors of Patents, have had nearly fifty years' continuous experience. Any one may quickly ascertain, free, whether an invention probably is patentable by writing to Munn & Co. Communications strictly confidential. A handbook of patents and how to obtain them sent free.

PATENTS

taken through Munn & Co. receive special notice in the *Scientific American*. This splendid weekly paper, elegantly illustrated, has the largest circulation of any scientific work. $3 a year. Specimen copies free. Address MUNN & CO., New York, 361 Broadway.

FASTEST **FINE GRINDER** KNOWN

NOTHING TOO HARD
GRINDS EVERYTHING
Emery Stones will replace Buhrs in any Mill without chang
VERTICAL ROCK EMERY MILL
3 Tons per Hour
Price $100 to $400 Ready for Belt
SEND FOR CIRCULAR
STURTEVANT MILL CO. Boston, Mass.
CHEAP HARD DURABLE

Patent Electric VISE.

What is claimed, is time saving; no turning of handle to bring jaws to the work, simply one sliding movement. The screw and nut is not used 1-10 as much as the old way, consequently will be that much less wear.
—MANUFACTURED BY—
Capital Machine Tool Co., Auburn, N. Y.



THE Motor of 19th Century
Can be used *any place*, to do *any work*, and by *any one*. No Boiler! No Fire! No Steam! No Ashes! No Gauges! No Engineer! A perfectly safe Motor for all places and purposes. *Cost of operation about one cent an hour to each indicated horse power.* For circulars, etc., address
CHARTER GAS ENGINE CO.
P. O. Box 148. Sterling, Ill.

INVENTORS AND MANUFACTURERS

Experimental Work, Castings, Fine and Intricate Machinery or Parts made in quantity. Secrecy and satisfaction guaranteed. White metal work a specialty.
THE H. H. FRANKLIN MFG. CO., SYRACUSE, N. Y.

McALLISTER M.F.G. OPTICIAN 49 NASSAU ST. NEW YORK.

FOR MAGIC LANTERNS, STEREOPTICONS, AND MANY THOUSANDS OF VIEWS, ILLUSTRATING EVERY SUBJECT
ENTERTAINMENT
HOME INSTRUCTION
AMUSEMENT
PUBLIC EXHIBITIONS
CHURCH & SUNDAY SCHOOL WORK.
COLLEGES
SECRET SOCIETIES
SEND FOR 240 PAGE CATALOGUE FREE.
A PROFITABLE BUSINESS FOR MAN WITH SMALL CAPITAL.

ELECTRIC MOTORS

Our exhibit in Electricity Building is the only complete exhibit of the application of Electricity to Power Work at the **WORLD'S FAIR. No Engineer or Mechanic should fail to visit it.**
☞ *Write for our World's Fair Folder.*

GENERAL ELECTRIC COMPANY.

DISTRICT OFFICES:

44 Broad Street ..... New York.
173 and 175 Adams Street ..... Chicago, Ill.
Fifth and Race Streets ..... Cincinnati, O.
Equitable Building ..... Atlanta, Ga.
15 First Street ..... San Francisco, Cal.
620 Atlantic Avenue ..... Boston, Mass.
509 Arch Street ..... Philadelphia, Pa.
401-407 Sibley Street ..... St. Paul, Minn.
1333 F Street, N. W. ..... Washington, D. C.

All business outside the U. S. transacted by Thomson-Houston International Electric Co. 44 Broad St. New York

ENGINES, BOILERS & MACHINE TOOLS. Complete outfits furnished. *Send for prices and 300 p. catalogue.* W. P. DAVIS, Rochester, N. Y.

The American Bell Telephone Company

125 MILK ST., BOSTON, MASS

This Company owns the Letters Patent No. 186,787, granted to Alexander Graham Bell, January 30, 1877, the scope of which has been defined by the Supreme Court of the United States in the following terms:

"The patent itself is for the mechanical structure of an electric telephone to be used to produce the electrical action on which the first patent rests. The third claim is for the use in such instruments of a diaphragm, made of a plate of iron or steel, or other material capable of inductive action; the fifth, of a permanent magnet constructed as described, with a coil upon the end or ends nearest the plate; the sixth, of a sounding box as described; the seventh, of a speaking or hearing tube as described for conveying the sounds; and the eighth, of a permanent magnet and plate combined. The claim is not for these several things in and of themselves, but for an electric telephone in the construction of which these things or any of them are used."

This Company also owns Letters Patent No. 463,569, granted to Emile Berliner, November 17, 1891, for a Combined Telegraph and Telephone; and controls Letters Patent No. 474,231, granted to Thomas A. Edison, May 3, 1892, for a Speaking Telegraph, which cover fundamental inventions and embrace all forms of microphone transmitters and of carbon telephones.

THE

SCIENTIFIC AMERICAN

☞ **ESTABLISHED 1845.**

The Most Popular Scientific Paper in the World
Only $3.00 a Year. Including Postage.
Weekly—52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of **three dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to
MUNN & CO., 361 Broadway, New York.

THE

Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States, Canada, and Mexico, $5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year to one address for $7.00. Single copies, 10 cents. Address and remit by postal order, express money order, or check,
MUNN & CO., 361 Broadway, New York.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Thirty-two large quarto pages, forming a large and splendid Magazine of Architecture, richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with Plans, Descriptions, Locations, Estimated Cost, etc.

The elegance and cheapness of this magnificent work have won for it the **Largest Circulation** of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to
MUNN & CO., Publishers,
361 Broadway, New York.

PRINTING INKS.

The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York

© 1893 SCIENTIFIC AMERICAN, INC.